



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECfp®2006 = 80.4**

**SPECfp\_base2006 = 78.9**

CPU2006 license: 9017


Test sponsor: Lenovo Group Limited

Tested by: Lenovo Group Limited

Test date: Oct-2015

Hardware Availability: May-2014

Software Availability: Jun-2014

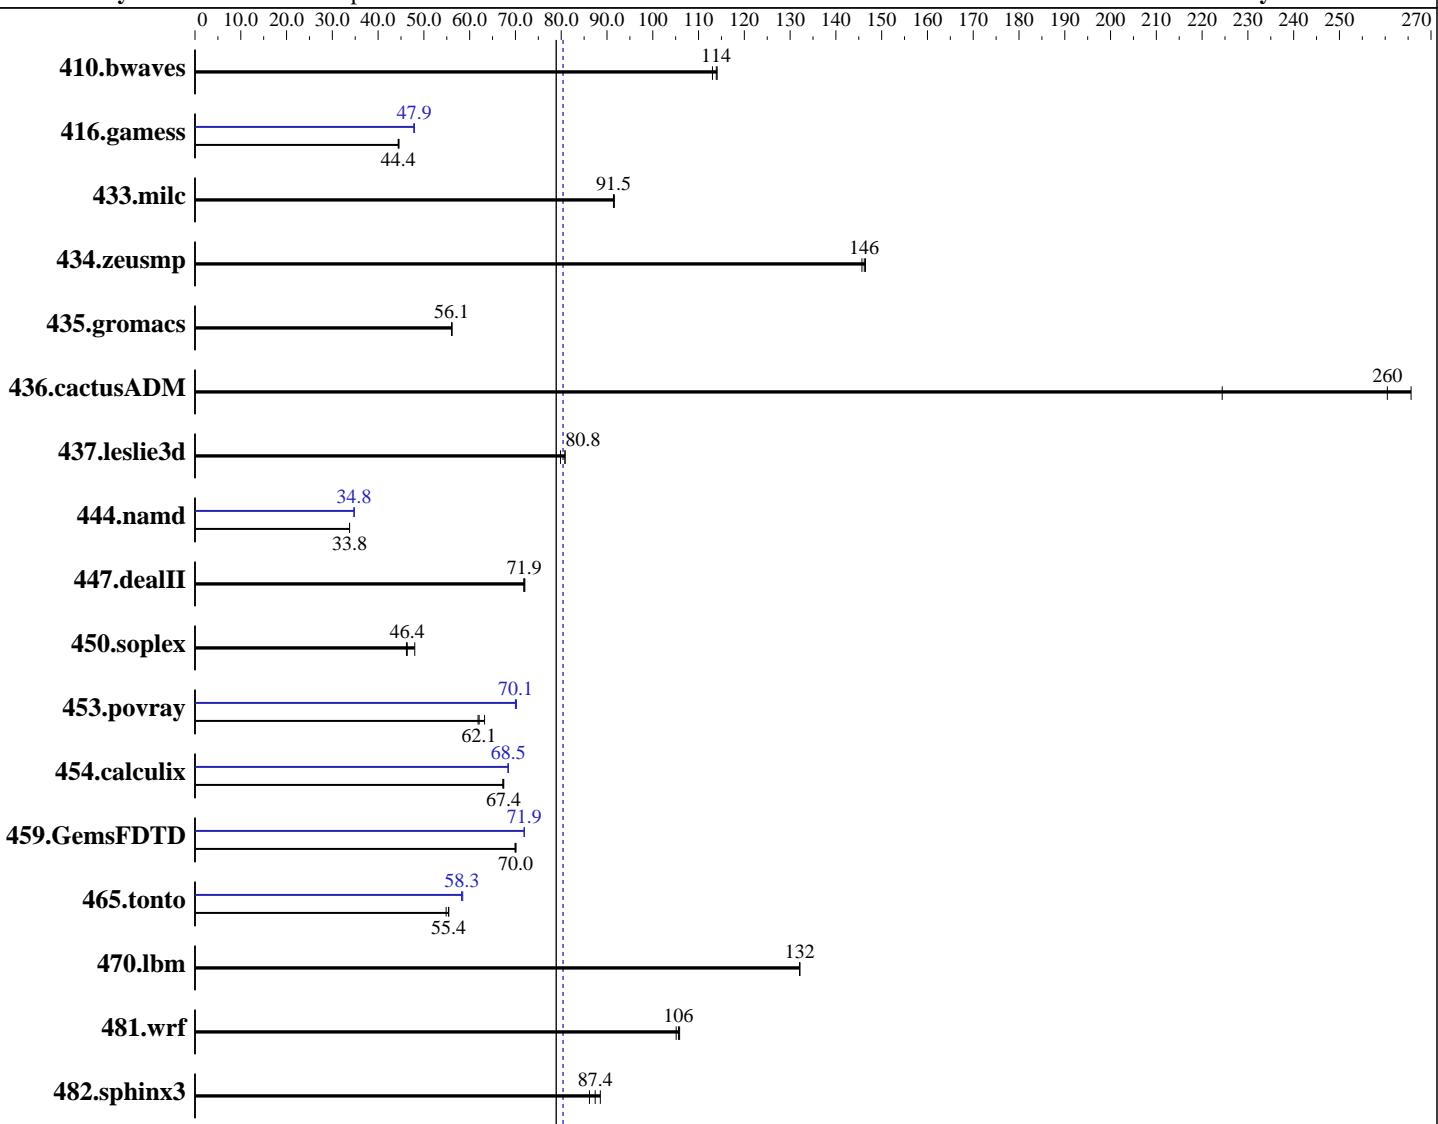

**SPECfp\_base2006 = 78.9**

**SPECfp2006 = 80.4**

### Hardware

CPU Name: Intel Xeon E3-1271 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
CPU MHz: 3600  
FPU: Integrated  
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
CPU(s) orderable: 1 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
Compiler: 3.10.0-229.el7.x86\_64  
C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs

*Continued on next page*

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECfp2006 = 80.4**

**SPECfp\_base2006 = 78.9**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4 x 4 GB 2Rx8 PC3L-12800E-11, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	119	114	<b>119</b>	<b>114</b>	120	113	119	114	<b>119</b>	<b>114</b>	120	113
416.gamess	439	44.6	441	44.4	<b>441</b>	<b>44.4</b>	410	47.8	409	47.9	<b>409</b>	<b>47.9</b>
433.milc	<b>100</b>	<b>91.5</b>	100	91.4	100	91.6	<b>100</b>	<b>91.5</b>	100	91.4	100	91.6
434.zeusmp	62.1	146	62.5	146	<b>62.2</b>	<b>146</b>	62.1	146	62.5	146	<b>62.2</b>	<b>146</b>
435.gromacs	127	56.0	<b>127</b>	<b>56.1</b>	127	56.1	127	56.0	<b>127</b>	<b>56.1</b>	127	56.1
436.cactusADM	45.0	266	<b>45.9</b>	<b>260</b>	53.3	224	45.0	266	<b>45.9</b>	<b>260</b>	53.3	224
437.leslie3d	<b>116</b>	<b>80.8</b>	116	80.8	118	79.8	<b>116</b>	<b>80.8</b>	116	80.8	118	79.8
444.namd	238	33.8	238	33.8	<b>238</b>	<b>33.8</b>	<b>231</b>	<b>34.8</b>	231	34.7	231	34.8
447.dealII	159	72.1	159	71.8	<b>159</b>	<b>71.9</b>	159	72.1	159	71.8	<b>159</b>	<b>71.9</b>
450.soplex	174	48.0	181	46.2	<b>180</b>	<b>46.4</b>	174	48.0	181	46.2	<b>180</b>	<b>46.4</b>
453.povray	<b>85.7</b>	<b>62.1</b>	86.0	61.8	84.1	63.3	75.8	70.2	<b>75.9</b>	<b>70.1</b>	76.0	70.0
454.calculix	<b>122</b>	<b>67.4</b>	123	67.2	122	67.4	121	68.4	<b>121</b>	<b>68.5</b>	121	68.5
459.GemsFDTD	151	70.1	152	69.9	<b>152</b>	<b>70.0</b>	148	71.9	<b>148</b>	<b>71.9</b>	147	71.9
465.tonto	<b>178</b>	<b>55.4</b>	178	55.4	179	54.9	168	58.5	169	58.2	<b>169</b>	<b>58.3</b>
470.lbm	104	132	<b>104</b>	<b>132</b>	104	132	104	132	<b>104</b>	<b>132</b>	104	132
481.wrf	106	106	106	105	<b>106</b>	<b>106</b>	106	106	106	105	<b>106</b>	<b>106</b>
482.sphinx3	220	88.5	226	86.2	<b>223</b>	<b>87.4</b>	220	88.5	226	86.2	<b>223</b>	<b>87.4</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS setting:

Hyper-Threading set to Disable

Operating Mode set to "Efficiency-Favor Performance"

Sysinfo program /root/cpu2006\_icl6/config/sysinfo.rev6914

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on x3100m5.labs.lenovo.com Tue Oct 13 19:23:28 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECfp2006 = 80.4**

**SPECfp\_base2006 = 78.9**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1271 v3 @ 3.60GHz
        1 "physical id"s (chips)
        4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 4
    physical 0: cores 0 1 2 3
cache size : 8192 KB
```

```
From /proc/meminfo
MemTotal:       16100784 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux x3100m5.labs.lenovo.com 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29
18:37:38 EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 13 14:33

```
SPEC is set to: /root/cpu2006_ic16
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs   50G   49G   1.6G  97% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[J9E113LUS-1.05]- 07/06/2014

Memory:

4x Hynix/Hyundai HMT351U7EFR8A-PB 4 GB 2 rank 1600 MHz

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECfp2006 = 80.4**

**SPECfp\_base2006 = 78.9**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## Platform Notes (Continued)

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/root/cpu2006\_ic16/libs/32:/root/cpu2006\_ic16/libs/64:/root/cpu2006\_ic16/sh"

OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECfp2006 = 80.4**

**SPECfp\_base2006 = 78.9**

CPU2006 license: 9017

Test date: Oct-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: May-2014

Tested by: Lenovo Group Limited

Software Availability: Jun-2014

## Base Portability Flags (Continued)

482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECfp2006 = 80.4**

**SPECfp\_base2006 = 78.9**

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
```

447.dealII: basepeak = yes

450.soplex: basepeak = yes

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
            -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
             -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
             -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
                -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
                -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
            -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
            -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
            -opt-malloc-options=3 -auto -unroll14
```

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Lenovo Group Limited

Lenovo System x3100 M5  
(Intel Xeon E3-1271 v3, 4.00 GHz)

**SPECfp2006 =** 80.4

**SPECfp\_base2006 =** 78.9

**CPU2006 license:** 9017

**Test date:** Oct-2015

**Test sponsor:** Lenovo Group Limited

**Hardware Availability:** May-2014

**Tested by:** Lenovo Group Limited

**Software Availability:** Jun-2014

## Peak Optimization Flags (Continued)

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-D.20150923.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:13:37 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2015.