SPEC® CINT2006 Result

Supermicro

Supermicro C7H170-M motherboard
(C7H170-M, Intel Core i5-6600K)

SPECint®_rate2006 = 206

SPECint_rate_base2006 = 200

CPU2006 license:	001176	**Test date:**	Oct-2015
Test sponsor:	Supermicro	**Hardware Availability:**	Aug-2015
Tested by:	Supermicro	**Software Availability:**	Sep-2014

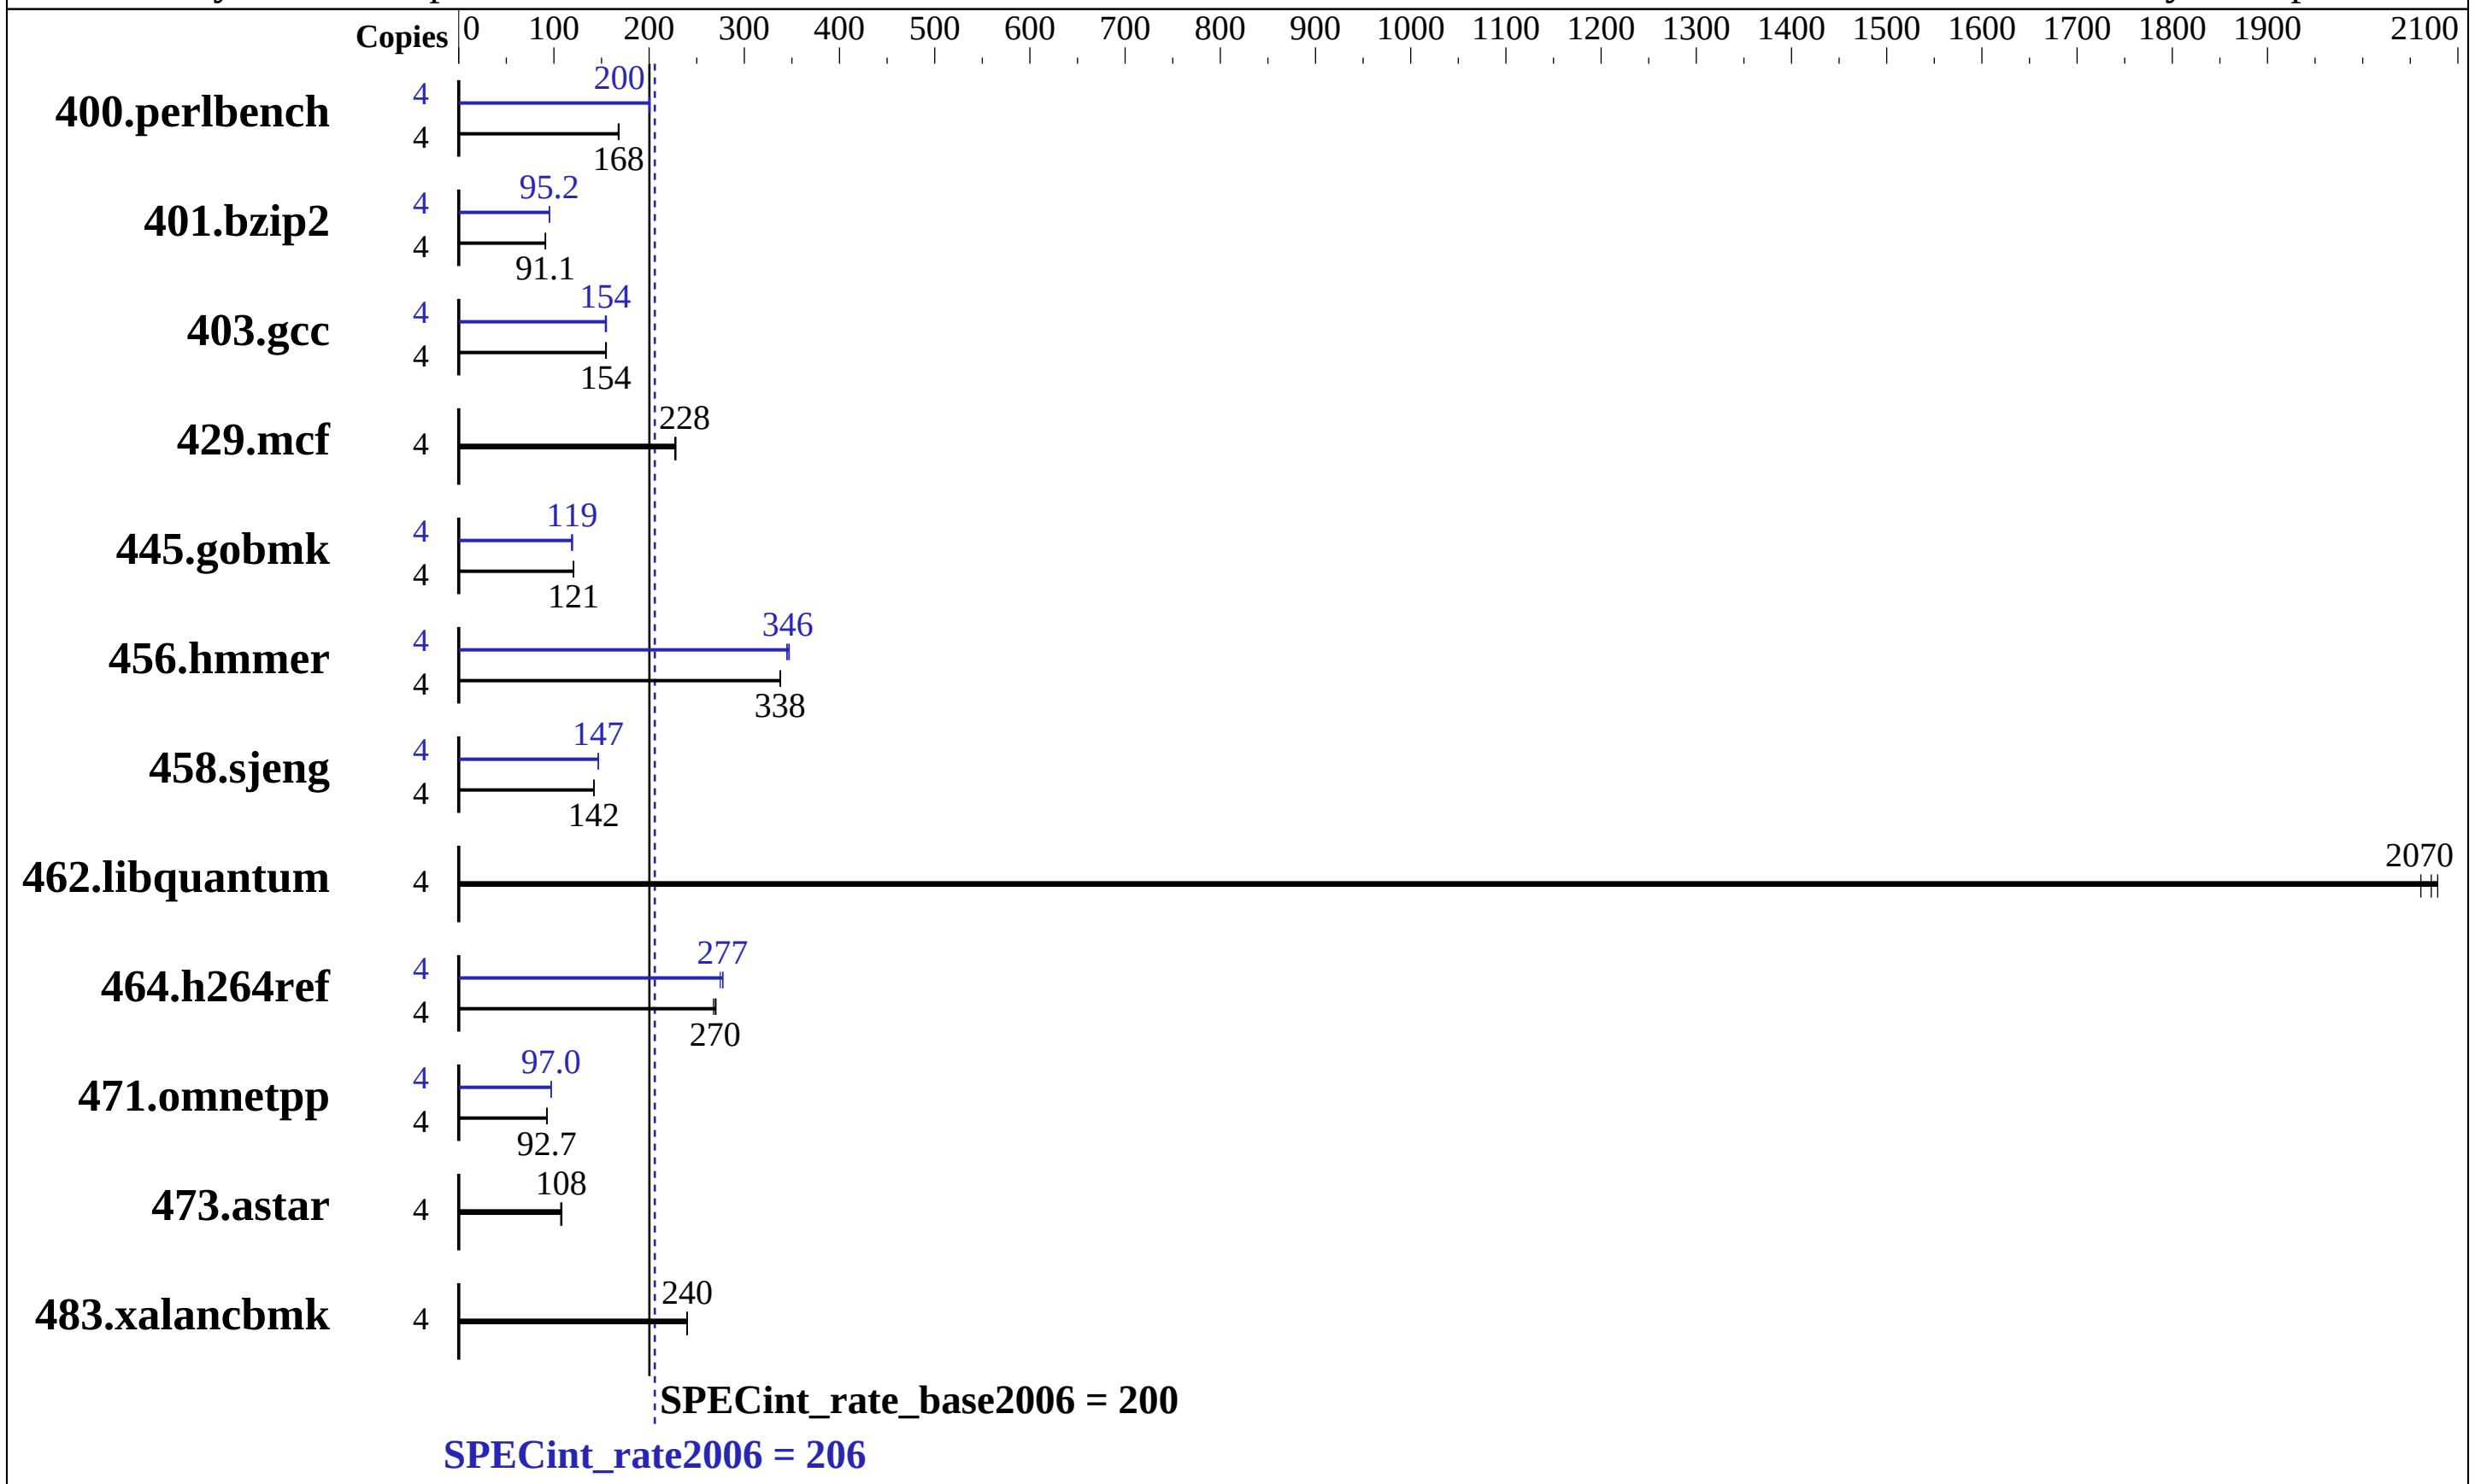

Hardware

CPU Name:	Intel Core i5-6600K
CPU Characteristics:	Intel Turbo Boost Technology up to 3.90 GHz
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (4 x 4 GB 1Rx8 PC4-2800R-U, running at 2133 MHz)
Disk Subsystem:	1 x 200 GB SATA III SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

Supermicro

Supermicro C7H170-M motherboard
(C7H170-M, Intel Core i5-6600K)

SPECint_rate2006 = 206

SPECint_rate_base2006 = 200

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2015
Hardware Availability: Aug-2015
Software Availability: Sep-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	**233**	**168**	233	168	232	168	4	195	200	194	201	**195**	**200**
401.bzip2	4	423	91.3	**424**	**91.1**	424	91.0	4	406	95.2	**406**	**95.2**	405	95.4
403.gcc	4	208	155	**209**	**154**	209	154	4	208	155	209	154	**209**	**154**
429.mcf	4	**160**	**228**	161	227	160	228	4	**160**	**228**	161	227	160	228
445.gobmk	4	348	120	**348**	**121**	347	121	4	**352**	**119**	351	119	354	119
456.hmmer	4	**111**	**338**	111	338	110	338	4	**108**	**346**	108	345	107	347
458.sjeng	4	**341**	**142**	341	142	341	142	4	**330**	**147**	330	147	330	147
462.libquantum	4	40.2	2060	39.9	2080	**40.0**	**2070**	4	40.2	2060	39.9	2080	**40.0**	**2070**
464.h264ref	4	328	270	331	268	**328**	**270**	4	**319**	**277**	322	275	319	278
471.omnetpp	4	269	92.9	270	92.5	**270**	**92.7**	4	258	96.9	**258**	**97.0**	257	97.2
473.astar	4	259	108	**261**	**108**	262	107	4	259	108	**261**	**108**	262	107
483.xalancbmk	4	**115**	**240**	115	240	115	240	4	**115**	**240**	115	240	115	240

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
As tested, the system used a Supermicro CSE-743TQ-865B-SQ chassis.
The chassis is configured with a PWS-865-PQ power supply, 1 SNK-P0046A4 heatsink, as well as 1 FAN-0103L4 rear fan and 2 FAN-0104L4 chassis fan.
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on C7H170-01 Sat Oct 17 02:22:26 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Core(TM) i5-6600K CPU @ 3.50GHz
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 4
        siblings  : 4
        physical 0: cores 0 1 2 3
     cache size : 6144 KB

  From /proc/meminfo
     MemTotal:       16334756 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.1 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.1"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

  uname -a:
     Linux C7H170-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Oct 17 02:19

  SPEC is set to: /usr/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      xfs   183G  5.2G  178G   3% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. T20151015150001 10/15/2015
    Memory:
     4x 0420 F4-2800C16-4GRK 4 GB 1 rank 2133 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs`
`-L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

400.perlbench: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/composer_xe_2015/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias`

456.hmmer: `-xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2` `-ansi-alias`

C++ benchmarks:

471.omnetpp: `-xCORE-AVX2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias` `-opt-ra-region-strategy=block` `-Wl,-z,muldefs` `-L/sh` `-lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revG.20141230.00.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Nov 17 19:14:05 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2015.