



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp<sup>®</sup>2006 = **110**

SPECfp\_base2006 = **106**

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Oct-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

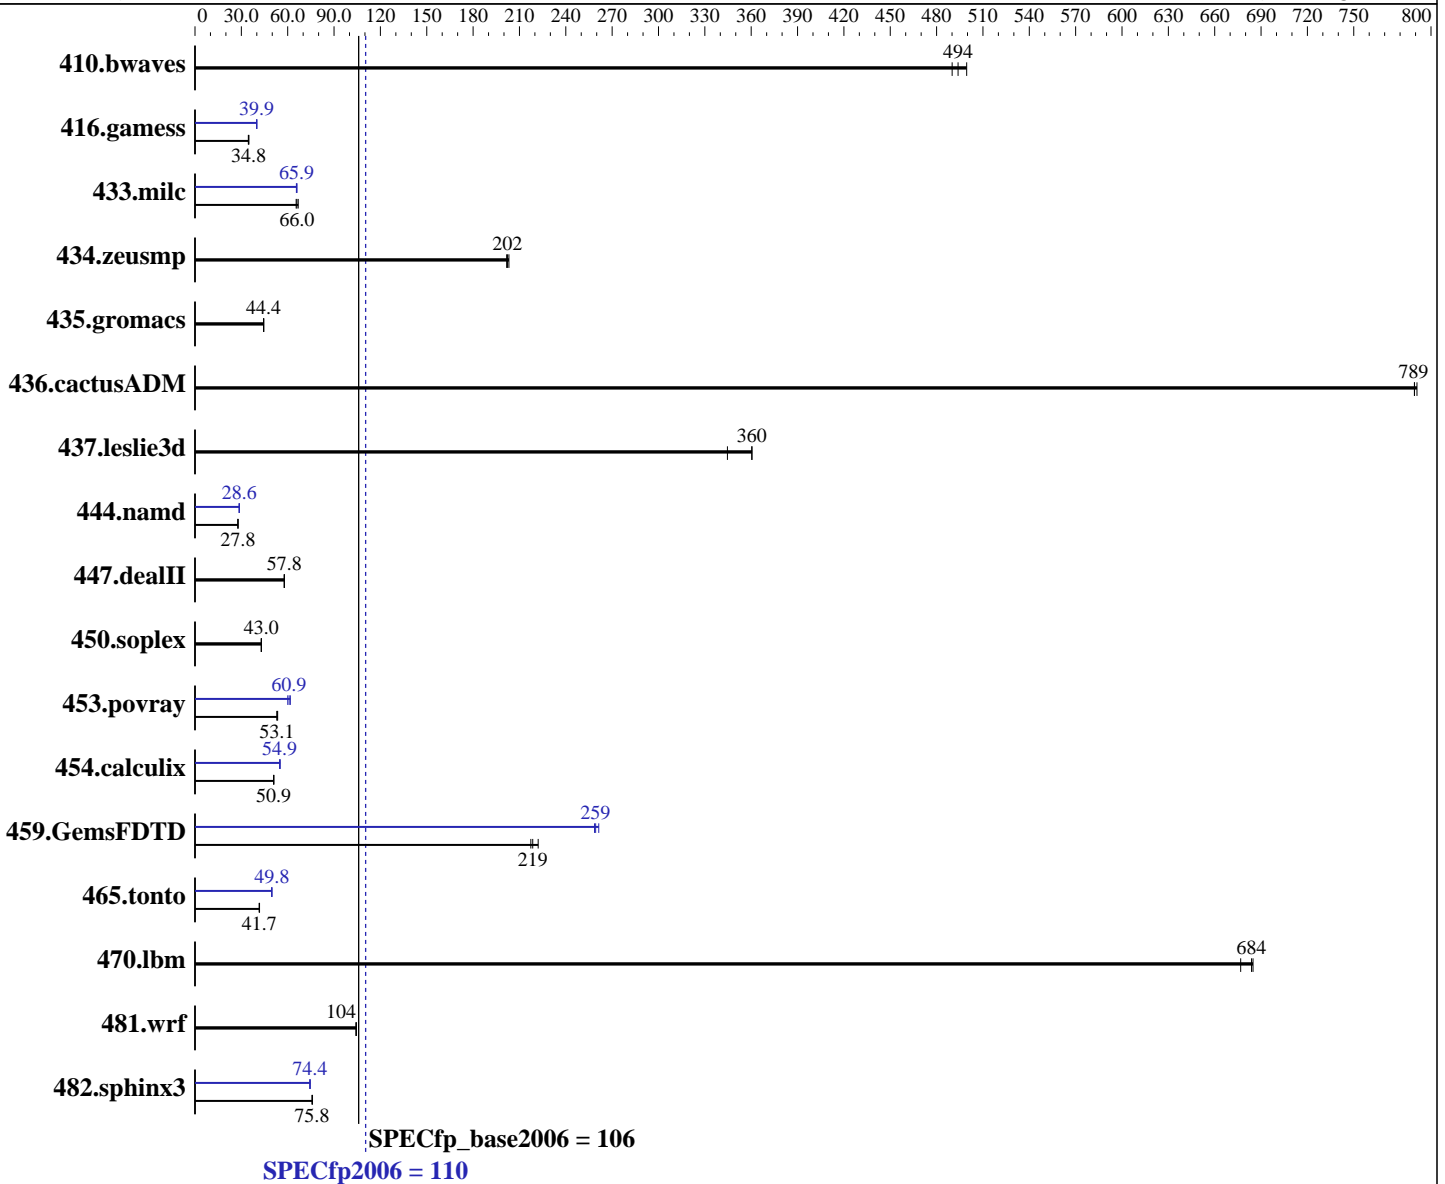

### Hardware

CPU Name: Intel Xeon E5-2660 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.11.1.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.047 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.047 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp2006 = **110**

SPECfp\_base2006 = **106**

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Oct-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

L3 Cache: 25 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 240 GB SATA II SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	27.7	490	27.2	499	<b><u>27.5</u></b>	<b><u>494</u></b>	27.7	490	27.2	499	<b><u>27.5</u></b>	<b><u>494</u></b>
416.gamess	<b><u>563</u></b>	<b><u>34.8</u></b>	562	34.8	567	34.5	490	39.9	<b><u>490</u></b>	<b><u>39.9</u></b>	489	40.0
433.milc	140	65.5	137	66.8	<b><u>139</u></b>	<b><u>66.0</u></b>	139	66.0	<b><u>139</u></b>	<b><u>65.9</u></b>	140	65.6
434.zeusmp	45.1	202	<b><u>45.0</u></b>	<b><u>202</u></b>	44.8	203	45.1	202	<b><u>45.0</u></b>	<b><u>202</u></b>	44.8	203
435.gromacs	161	44.4	160	44.5	<b><u>161</u></b>	<b><u>44.4</u></b>	161	44.4	160	44.5	<b><u>161</u></b>	<b><u>44.4</u></b>
436.cactusADM	15.1	789	<b><u>15.1</u></b>	<b><u>789</u></b>	15.1	791	15.1	789	<b><u>15.1</u></b>	<b><u>789</u></b>	15.1	791
437.leslie3d	27.3	345	26.1	361	<b><u>26.1</u></b>	<b><u>360</u></b>	27.3	345	26.1	361	<b><u>26.1</u></b>	<b><u>360</u></b>
444.namd	288	27.8	288	27.8	<b><u>288</u></b>	<b><u>27.8</u></b>	<b><u>280</u></b>	<b><u>28.6</u></b>	280	28.6	280	28.7
447.dealII	198	57.9	198	57.8	<b><u>198</u></b>	<b><u>57.8</u></b>	198	57.9	198	57.8	<b><u>198</u></b>	<b><u>57.8</u></b>
450.soplex	<b><u>194</u></b>	<b><u>43.0</u></b>	194	43.0	195	42.8	<b><u>194</u></b>	<b><u>43.0</u></b>	194	43.0	195	42.8
453.povray	<b><u>100</u></b>	<b><u>53.1</u></b>	99.4	53.5	100	53.0	<b><u>87.3</u></b>	<b><u>60.9</u></b>	86.2	61.7	88.6	60.0
454.calculix	162	51.1	162	50.9	<b><u>162</u></b>	<b><u>50.9</u></b>	150	54.9	<b><u>150</u></b>	<b><u>54.9</u></b>	150	55.1
459.GemsFDTD	48.8	217	47.8	222	<b><u>48.5</u></b>	<b><u>219</u></b>	40.6	261	<b><u>40.9</u></b>	<b><u>259</u></b>	41.0	259
465.tonto	237	41.5	236	41.8	<b><u>236</u></b>	<b><u>41.7</u></b>	198	49.8	<b><u>198</u></b>	<b><u>49.8</u></b>	198	49.6
470.lbm	<b><u>20.1</u></b>	<b><u>684</u></b>	20.3	677	20.1	685	<b><u>20.1</u></b>	<b><u>684</u></b>	20.3	677	20.1	685
481.wrf	107	104	<b><u>107</u></b>	<b><u>104</u></b>	107	104	107	104	<b><u>107</u></b>	<b><u>104</u></b>	107	104
482.sphinx3	<b><u>257</u></b>	<b><u>75.8</u></b>	256	76.1	257	75.8	262	74.3	261	74.6	<b><u>262</u></b>	<b><u>74.4</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings:  
Intel(R) Hyper-Threading Tech = Disabled  
Power & Performance = Performance  
Enforce POR = Disabled  
Memory Operating Speed Selection = 2133  
Cluster-on-Die = Disabled  
Set Fan Profile = Performance  
Fan PWM Offset = 0

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp2006 = 110

SPECfp\_base2006 = 106

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Oct-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

### Platform Notes (Continued)

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on SUT Tue Oct 27 14:56:42 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2660 v3 @ 2.60GHz
 2 "physical id"s (chips)
 20 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 10
siblings   : 10
physical 0: cores 0 1 2 3 4 8 9 10 11 12
physical 1: cores 0 1 2 3 4 8 9 10 11 12
cache size : 25600 KB
```

From /proc/meminfo

```
MemTotal:      263873456 kB
HugePages_Total: 1
Hugepagesize:   2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
```

```
os-release.rpmnew:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
```

```
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

uname -a:

```
Linux SUT 3.10.0-229.11.1.el7.x86_64 #5 SMP Mon Sep 14 17:11:19 CEST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp2006 = 110**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECfp\_base2006 = 106**

**CPU2006 license:** 9008

**Test date:** Oct-2015

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Sep-2014

**Tested by:** ACTION S.A.

**Software Availability:** Aug-2015

## Platform Notes (Continued)

run-level 3 Oct 27 09:32

SPEC is set to: /cpu2006.1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	212G	38G	163G	19%	/

Additional information from dmidecode:

BIOS Intel Corporation SE5C610.86B.01.01.0009.060120151350 06/01/2015

Memory:

16x 16 GB

16x Micron 36ASF2G72PZ-2G1A2 16 GB 2134 MHz 2 rank

8x NO DIMM NO DIMM

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

OMP\_NUM\_THREADS = "20"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

SPECfp2006 = 110

SPECfp\_base2006 = 106

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Oct-2015

Hardware Availability: Sep-2014

Software Availability: Aug-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks:

```

icpc -m64

```

Fortran benchmarks:

```

ifort -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECfp2006 = 110**

**SPECfp\_base2006 = 106**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Oct-2015

**Hardware Availability:** Sep-2014

**Software Availability:** Aug-2015

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2660 v3, 2.60 GHz)

**SPECfp2006 = 110**

**SPECfp\_base2006 = 106**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Oct-2015

**Hardware Availability:** Sep-2014

**Software Availability:** Aug-2015

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Nov 17 19:15:15 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 November 2015.