SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

ASUS Z97M-PLUS Motherboard (Intel Core i7-5775C)

SPECint®_rate2006 = 246

SPECint_rate_base2006 = 231

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2015
Hardware Availability: Jun-2015
Software Availability: Aug-2015

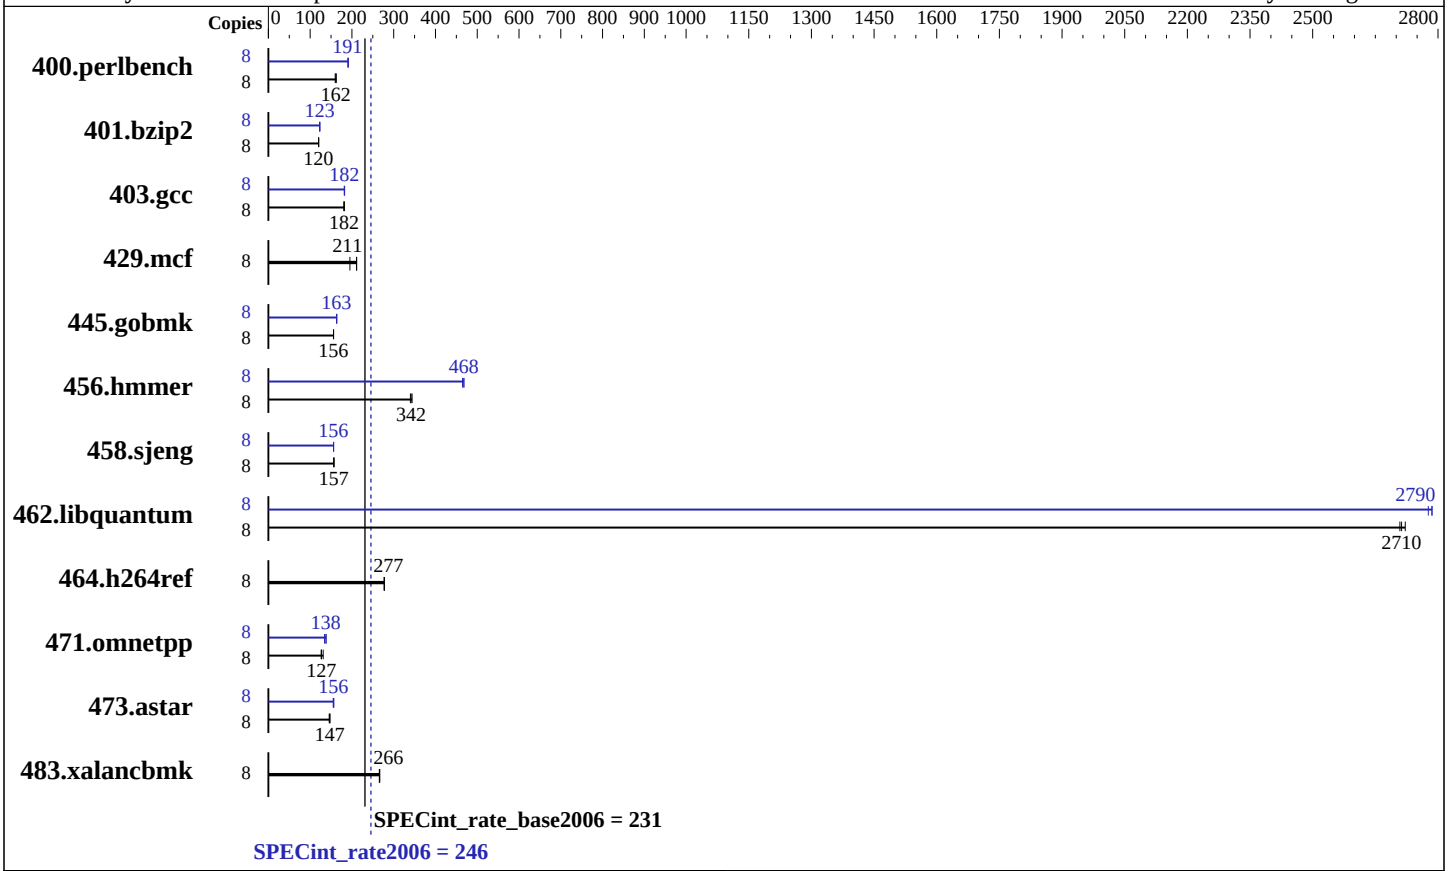

Hardware

CPU Name:	Intel Core i7-5775C
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx4 PC3-14900U-10, running at 1600MHz)
Disk Subsystem:	1 TB Seagate SATA HDD, 7200 RPM
Other Hardware:	None

Software

Operating System:	Microsoft Windows 10 Pro 10.0.10240 N/A Build 10240
Compiler:	C/C++: Version 16.0.0.110 of Intel C++ Studio XE for Windows; Libraries: Version 18.00.30723 of Microsoft Visual Studio 2013
Auto Parallel:	No
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap Library Version 11.0 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

ASUS Z97M-PLUS Motherboard (Intel Core i7-5775C)

SPECint_rate2006 = 246

SPECint_rate_base2006 = 231

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2015
Hardware Availability: Jun-2015
Software Availability: Aug-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	487	160	**483**	**162**	482	162	8	**409**	**191**	409	191	410	190
401.bzip2	8	642	120	639	121	**641**	**120**	8	629	122	**626**	**123**	626	123
403.gcc	8	355	182	**355**	**182**	356	181	8	352	182	**353**	**182**	355	182
429.mcf	8	345	211	374	195	**345**	**211**	8	345	211	374	195	**345**	**211**
445.gobmk	8	**538**	**156**	539	156	537	156	8	**513**	**163**	513	164	513	163
456.hmmer	8	217	344	**218**	**342**	219	340	8	160	468	161	465	**160**	**468**
458.sjeng	8	617	157	617	157	**617**	**157**	8	**620**	**156**	620	156	620	156
462.libquantum	8	**61.1**	**2710**	60.9	2720	61.2	2710	8	59.7	2780	59.5	2790	**59.5**	**2790**
464.h264ref	8	639	278	638	278	**638**	**277**	8	639	278	638	278	**638**	**277**
471.omnetpp	8	**393**	**127**	395	126	381	131	8	361	138	**363**	**138**	373	134
473.astar	8	382	147	385	146	**383**	**147**	8	358	157	**361**	**156**	361	155
483.xalancbmk	8	208	266	207	266	**208**	**266**	8	208	266	207	266	**208**	**266**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
To compile these binaries, the Intel Compiler 16.0 was set up to
generate 32-bit binaries with the command:
"ipsxe-comp-vars.bat ia32 vs2010" (shortcut provided in the Intel(r)
Parallel Studio XE 2016 program folder)
```

Platform Notes

```
Sysinfo program C:\SPEC16.0/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ \8787f7622badcf24e01c368b1db4377c
running on DESKTOP-K1NMJC0 Tue Oct 13 23:09:33 2015

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

Trying 'systeminfo'
OS Name       : Microsoft Windows 10 Pro
OS Version    : 10.0.10240 N/A Build 10240
System Manufacturer: ASUS
System Model  : All Series
Processor(s)  : 1 Processor(s) Installed.
     [01]: Intel64 Family 6 Model 71 Stepping 1 GenuineIntel ~3300 Mhz
BIOS Version  : American Megatrends Inc. 2802, 5/19/2015
Total Physical Memory: 8,063 MB

Trying 'wmic cpu get /value'
DeviceID      : CPU0
```

Continued on next page

Platform Notes (Continued)

```
L2CacheSize   : 1024
L3CacheSize   : 6144
MaxClockSpeed : 3301
Name          : Intel(R) Core(TM) i7-5775C CPU @ 3.30GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 8

(End of data from sysinfo program)
```

Component Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
```

General Notes

```
Binaries compiled on a system with 1x Intel Xeon E5-2699 v3 CPU
+ 64GB memory using Windows 8.1 Enterprise 64-bit
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc12 -Qstd=c99
```

C++ benchmarks:
```
icl -Qvc12
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000
```

C++ benchmarks:
```
-QxCORE-AVX2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F256000000 shlW32M.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icl -Qvc12 -Qstd=c99`

C++ benchmarks (except as noted below):
`icl -Qvc12`

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
456.hmmer: `-DSPEC_CPU_P64`
458.sjeng: `-DSPEC_CPU_P64`
462.libquantum: `-DSPEC_CPU_P64`
464.h264ref: `-DWIN32`
473.astar: `-DSPEC_CPU_P64`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch`
`/F256000000 shlW32M.lib -link /FORCE:MULTIPLE`

401.bzip2: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias`
`/F256000000`

403.gcc: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch /F256000000`

429.mcf: `basepeak = yes`

445.gobmk: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O2 -Qprec-div- -Qansi-alias /F256000000`

464.h264ref: `basepeak = yes`

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-QxCORE-AVX2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2) `-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F256000000 shlW32M.lib -link /FORCE:MULTIPLE`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-windows.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 1 17:42:31 2015 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 December 2015.