



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-SQ motherboard
(C7Z170-SQ , Intel Core i5-6500)

SPECfp®_rate2006 = 173

SPECfp_rate_base2006 = 170

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

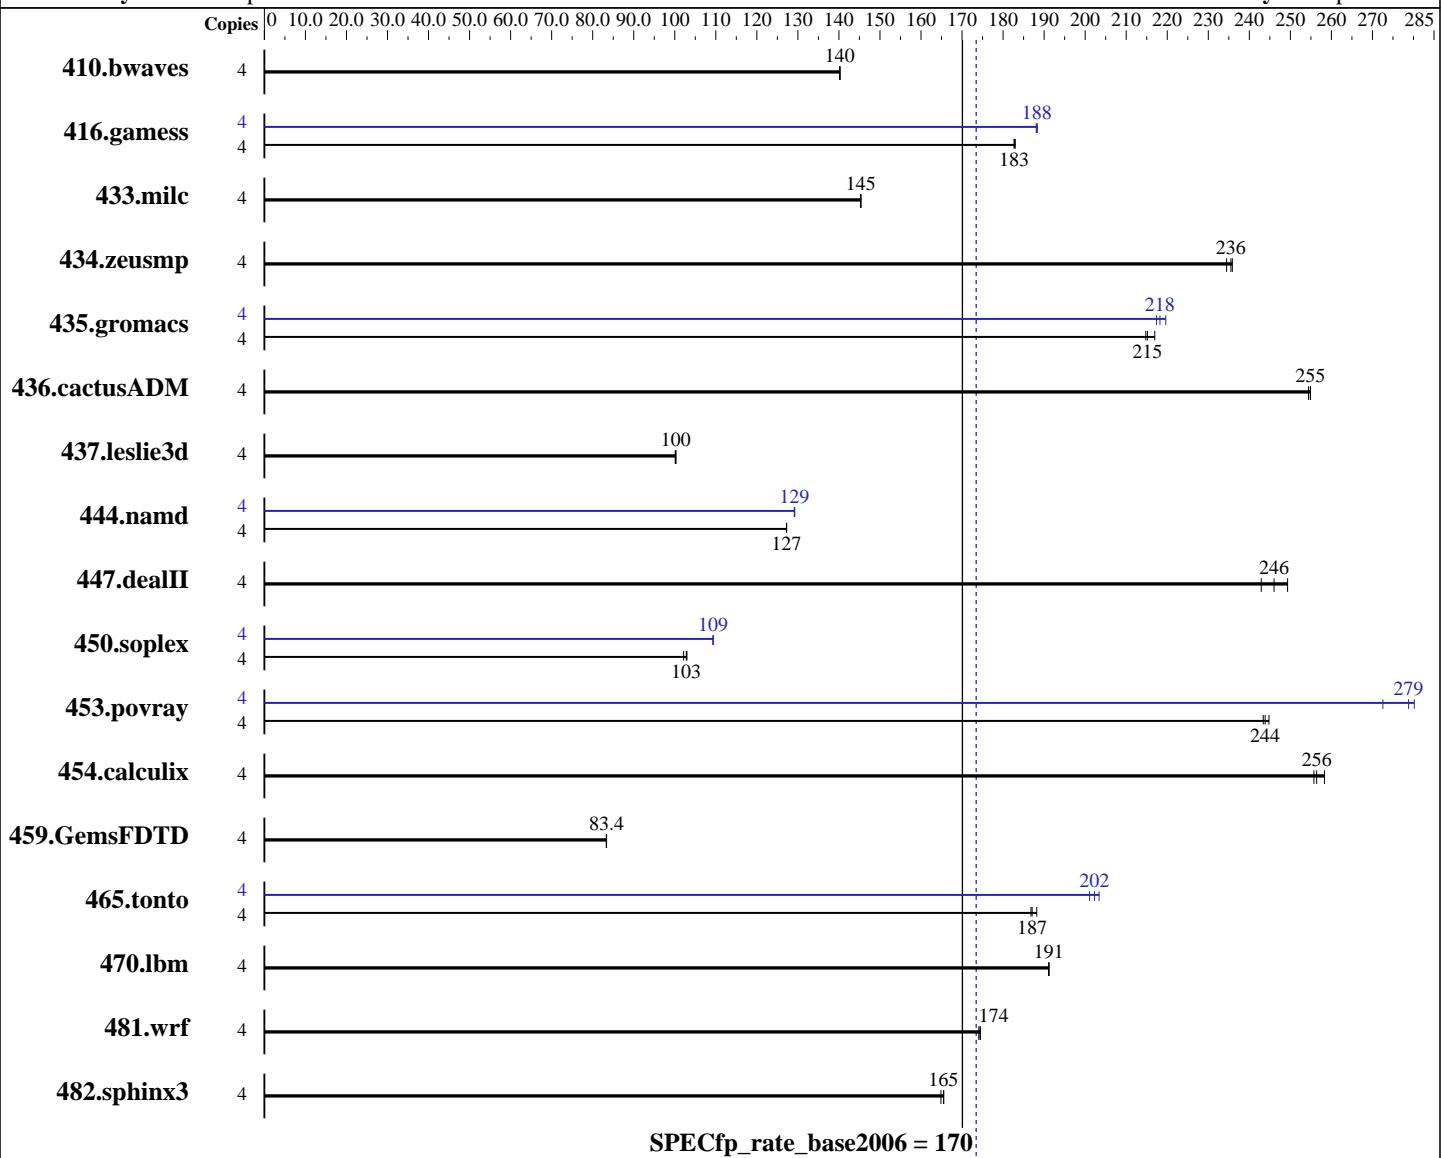

Hardware

CPU Name: Intel Core i5-6500
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz: 3200
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.e17.x86_64
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: No
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-SQ motherboard
(C7Z170-SQ , Intel Core i5-6500)

SPECfp_rate2006 = 173

SPECfp_rate_base2006 = 170

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB 1Rx8 PC4-2133P-U)
Disk Subsystem: 1 x 400 GB SATA III SSD
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	<u>388</u>	<u>140</u>	387	140	388	140	4	<u>388</u>	<u>140</u>	387	140	388	140
416.gamess	4	<u>429</u>	<u>183</u>	428	183	429	183	4	416	188	<u>416</u>	<u>188</u>	416	188
433.milc	4	253	145	<u>253</u>	<u>145</u>	253	145	4	253	145	<u>253</u>	<u>145</u>	253	145
434.zeusmp	4	154	236	<u>155</u>	<u>236</u>	155	234	4	154	236	<u>155</u>	<u>236</u>	155	234
435.gromacs	4	132	217	<u>133</u>	<u>215</u>	133	215	4	130	220	<u>131</u>	<u>218</u>	131	217
436.cactusADM	4	188	254	188	255	<u>188</u>	<u>255</u>	4	188	254	188	255	<u>188</u>	<u>255</u>
437.leslie3d	4	<u>375</u>	<u>100</u>	376	100	375	100	4	<u>375</u>	<u>100</u>	376	100	375	100
444.namd	4	<u>252</u>	<u>127</u>	252	127	252	127	4	248	129	248	129	<u>248</u>	<u>129</u>
447.dealII	4	188	243	<u>186</u>	<u>246</u>	184	249	4	188	243	<u>186</u>	<u>246</u>	184	249
450.soplex	4	324	103	<u>324</u>	<u>103</u>	327	102	4	305	109	<u>305</u>	<u>109</u>	305	109
453.povray	4	86.9	245	<u>87.3</u>	<u>244</u>	87.4	243	4	75.9	280	78.1	273	<u>76.3</u>	<u>279</u>
454.calculix	4	128	258	<u>129</u>	<u>256</u>	129	256	4	128	258	<u>129</u>	<u>256</u>	129	256
459.GemsFDTD	4	509	83.4	<u>509</u>	<u>83.4</u>	509	83.3	4	509	83.4	<u>509</u>	<u>83.4</u>	509	83.3
465.tonto	4	211	187	<u>210</u>	<u>187</u>	209	188	4	<u>195</u>	<u>202</u>	194	203	196	201
470.lbm	4	287	191	288	191	<u>288</u>	<u>191</u>	4	287	191	288	191	<u>288</u>	<u>191</u>
481.wrf	4	256	174	<u>256</u>	<u>174</u>	257	174	4	256	174	<u>256</u>	<u>174</u>	257	174
482.sphinx3	4	473	165	471	166	<u>471</u>	<u>165</u>	4	473	165	471	166	<u>471</u>	<u>165</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

As tested, the system used a Supermicro CSE-732G-903B chassis.

The chassis is configured with a PWS-903-PQ power supply, 1 SNK-P0051AP4 heatsink, as well as 1 FAN-0124L4 rear cooling fan.

Sysinfo program /usr/cpu2006/config/sysinfo.rev6914

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-SQ motherboard
(C7Z170-SQ , Intel Core i5-6500)

SPECfp_rate2006 = 173

SPECfp_rate_base2006 = 170

CPU2006 license: 001176

Test date: Dec-2015

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Sep-2015

Platform Notes (Continued)

\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Dec 18 17:42:53 2015

This section contains SUT (System Under Test) info as seen by
some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Core(TM) i5-6500 CPU @ 3.20GHz
        1 "physical id"s (chips)
        4 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 4
    physical 0: cores 0 1 2 3
cache size : 6144 KB
```

```
From /proc/meminfo
MemTotal:       16044768 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
    NAME="Red Hat Enterprise Linux Server"
    VERSION="7.1 (Maipo)"
    ID="rhel"
    ID_LIKE="fedora"
    VERSION_ID="7.1"
    PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
    ANSI_COLOR="0;31"
    CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
EST 2015 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 18 12:26
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   369G  173G  197G  47% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-SQ motherboard
(C7Z170-SQ , Intel Core i5-6500)

SPECfp_rate2006 = 173

SPECfp_rate_base2006 = 170

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0c 12/09/2015

Memory:

4x Micron 8ATF51264AZ-2G1A2 4 GB 1 rank 2133 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-SQ motherboard
(C7Z170-SQ , Intel Core i5-6500)

SPECfp_rate2006 = 173

SPECfp_rate_base2006 = 170

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC_CPU_LP64

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-SQ motherboard
(C7Z170-SQ , Intel Core i5-6500)

SPECfp_rate2006 = 173

SPECfp_rate_base2006 = 170

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -D_FILE_OFFSET_BITS=64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: basepeak = yes

```

C++ benchmarks:

```

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
           -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2)
           -opt-malloc-options=3
453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
           -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
           -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14
           -ansi-alias

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-SQ motherboard
(C7Z170-SQ , Intel Core i5-6500)

SPECfp_rate2006 = 173

SPECfp_rate_base2006 = 170

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll12
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro C7Z170-SQ motherboard
(C7Z170-SQ , Intel Core i5-6500)

SPECfp_rate2006 = 173

SPECfp_rate_base2006 = 170

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Dec-2015

Hardware Availability: Sep-2015

Software Availability: Sep-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 12 15:46:14 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 January 2016.