



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Pentium G4400)

SPECfp®2006 = 71.9

SPECfp_base2006 = 71.4

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

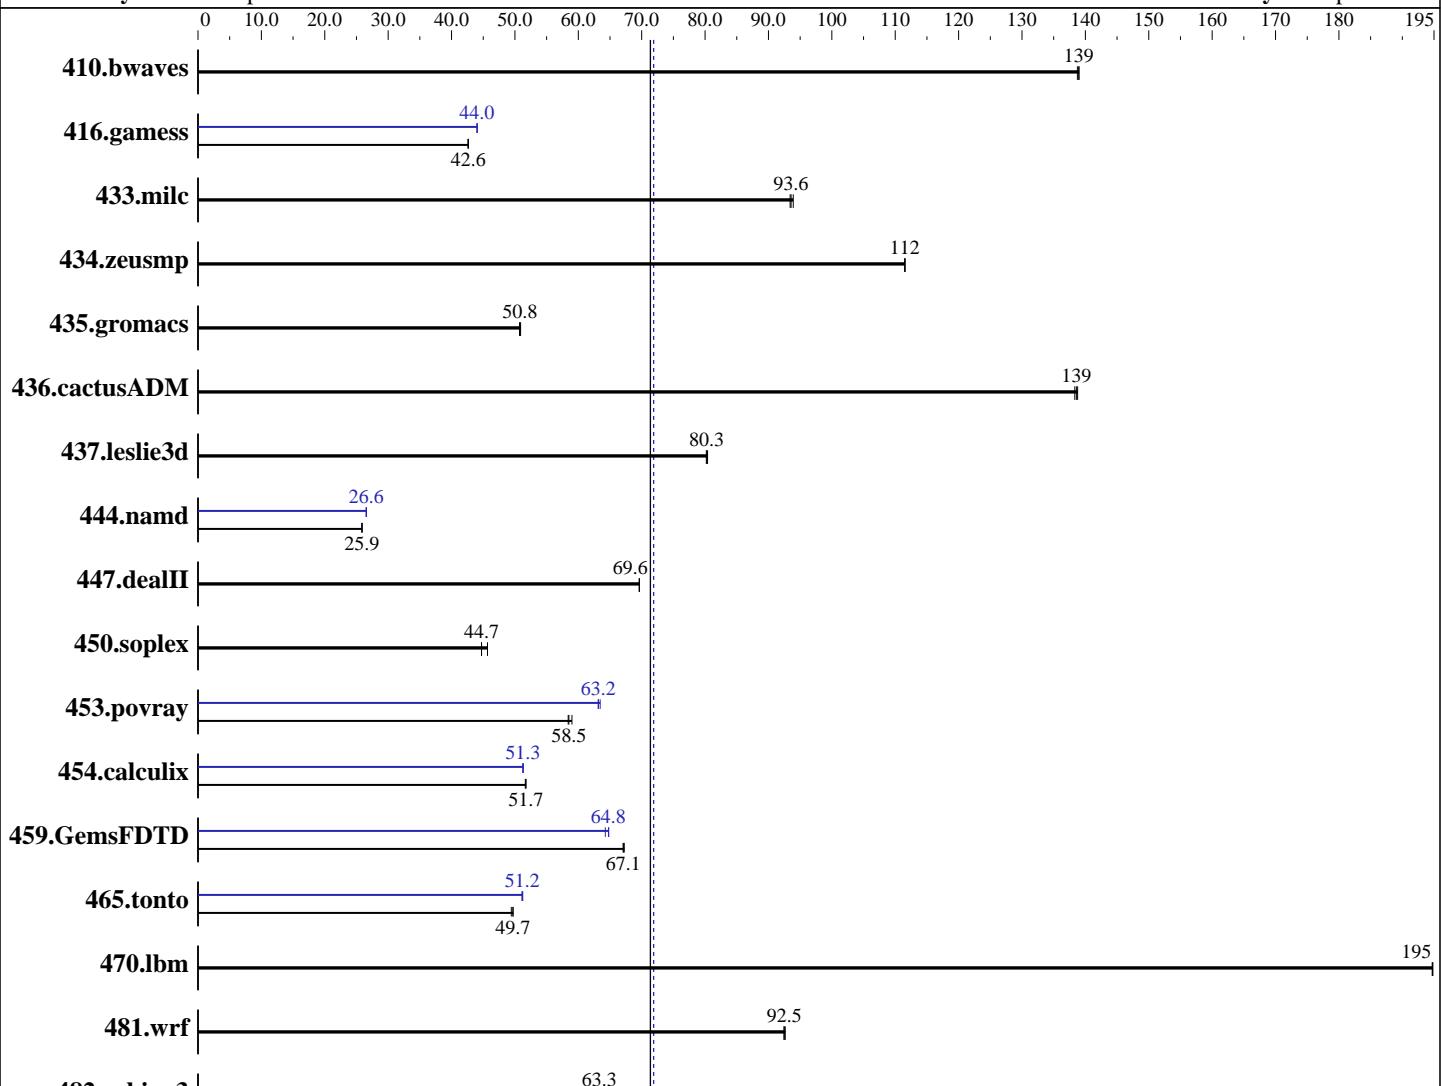

SPECfp_base2006 = 71.4

SPECfp2006 = 71.9

Hardware

CPU Name: Intel Pentium G4400
CPU Characteristics:
CPU MHz: 3300
FPU: Integrated
CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 7.1, Kernel 3.10.0-229.el7.x86_64
Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel: Yes
File System: xfs
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F, Intel Pentium G4400)

SPECfp2006 = 71.9

SPECfp_base2006 = 71.4

CPU2006 license: 001176

Test date: Jan-2016

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Sep-2015

L3 Cache: 3 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (4 x 8 GB 2Rx8 PC4-2133P-E)
Disk Subsystem: 1 x 200 GB SATA III SSD
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	98.0	139	97.8	139	97.8	139	98.0	139	97.8	139	97.8	139
416.gamess	459	42.6	459	42.6	459	42.6	445	44.0	445	44.0	445	44.0
433.milc	98.1	93.6	97.7	93.9	98.3	93.4	98.1	93.6	97.7	93.9	98.3	93.4
434.zeusmp	81.6	112	81.6	112	81.6	112	81.6	112	81.6	112	81.6	112
435.gromacs	141	50.7	141	50.8	140	50.9	141	50.7	141	50.8	140	50.9
436.cactusADM	86.1	139	86.2	139	86.4	138	86.1	139	86.2	139	86.4	138
437.leslie3d	117	80.2	117	80.4	117	80.3	117	80.2	117	80.4	117	80.3
444.namd	310	25.9	310	25.9	310	25.9	302	26.6	302	26.5	302	26.6
447.dealII	164	69.6	164	69.6	164	69.6	164	69.6	164	69.6	164	69.6
450.soplex	183	45.7	186	44.7	186	44.7	183	45.7	186	44.7	186	44.7
453.povray	91.1	58.4	90.2	59.0	90.9	58.5	83.8	63.5	84.3	63.1	84.2	63.2
454.calculix	160	51.7	159	51.7	160	51.6	161	51.2	161	51.3	161	51.3
459.GemsFDTD	158	67.1	158	67.2	158	67.1	165	64.3	164	64.8	164	64.8
465.tonto	198	49.7	198	49.7	199	49.4	192	51.2	193	51.1	192	51.2
470.lbm	70.5	195	70.6	195	70.5	195	70.5	195	70.6	195	70.5	195
481.wrf	121	92.6	121	92.4	121	92.5	121	92.6	121	92.4	121	92.5
482.sphinx3	308	63.3	307	63.4	308	63.3	308	63.3	307	63.4	308	63.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

As tested, the system used a Supermicro CSE-113MFAC2-R606CB chassis. The chassis is configured with 2 PWS-606P-1R redundant power supply, 1 SNK-P0046P heatsink, as well as 4 FAN-0154L4 middle cooling fan.
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on X11SSM-01 Thu Jan 7 06:25:23 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F , Intel Pentium G4400)

SPECfp2006 = 71.9

SPECfp_base2006 = 71.4

CPU2006 license: 001176

Test date: Jan-2016

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Sep-2015

Platform Notes (Continued)

```
From /proc/cpuinfo
model name : Intel(R) Pentium(R) CPU G4400 @ 3.30GHz
  1 "physical id"s (chips)
  2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 2
  siblings : 2
  physical 0: cores 0 1
cache size : 3072 KB
```

```
From /proc/meminfo
MemTotal:      32769340 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux Server"
  VERSION="7.1 (Maipo)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="7.1"
  PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
  ANSI_COLOR="0;31"
  CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux X11SSM-01 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38 EST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 7 01:07
```

```
SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2        xfs   183G   32G  151G  18% /
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 1.0b 12/29/2015

Memory:
 4x Micron 18ASF1G72AZ-2G1A1 8 GB 2 rank 2133 MHz

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F , Intel Pentium G4400)

SPECfp2006 = 71.9

SPECfp_base2006 = 71.4

CPU2006 license: 001176

Test date: Jan-2016

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Sep-2015

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

OMP_NUM_THREADS = "2"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
  434.zeusmp: -DSPEC_CPU_LP64
  435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
  459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F , Intel Pentium G4400)

SPECfp2006 = 71.9

SPECfp_base2006 = 71.4

CPU2006 license: 001176

Test date: Jan-2016

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Sep-2015

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xsse4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xsse4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xsse4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xsse4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F , Intel Pentium G4400)

SPECfp2006 = 71.9

SPECfp_base2006 = 71.4

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2016

Hardware Availability: Sep-2015

Software Availability: Sep-2015

Peak Optimization Flags (Continued)

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch
-parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1)
-prof-use(pass 2) -inline-calloc -opt-malloc-options=3
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

Supermicro X11SSM-F motherboard
(X11SSM-F , Intel Pentium G4400)

SPECfp2006 = 71.9

SPECfp_base2006 = 71.4

CPU2006 license: 001176

Test date: Jan-2016

Test sponsor: Supermicro

Hardware Availability: Sep-2015

Tested by: Supermicro

Software Availability: Sep-2015

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jan 26 15:12:08 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 January 2016.