



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 S6 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp<sup>®</sup>2006 = 108

SPECfp\_base2006 = 104

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Feb-2016

Hardware Availability: Sep-2014

Software Availability: Aug-2015

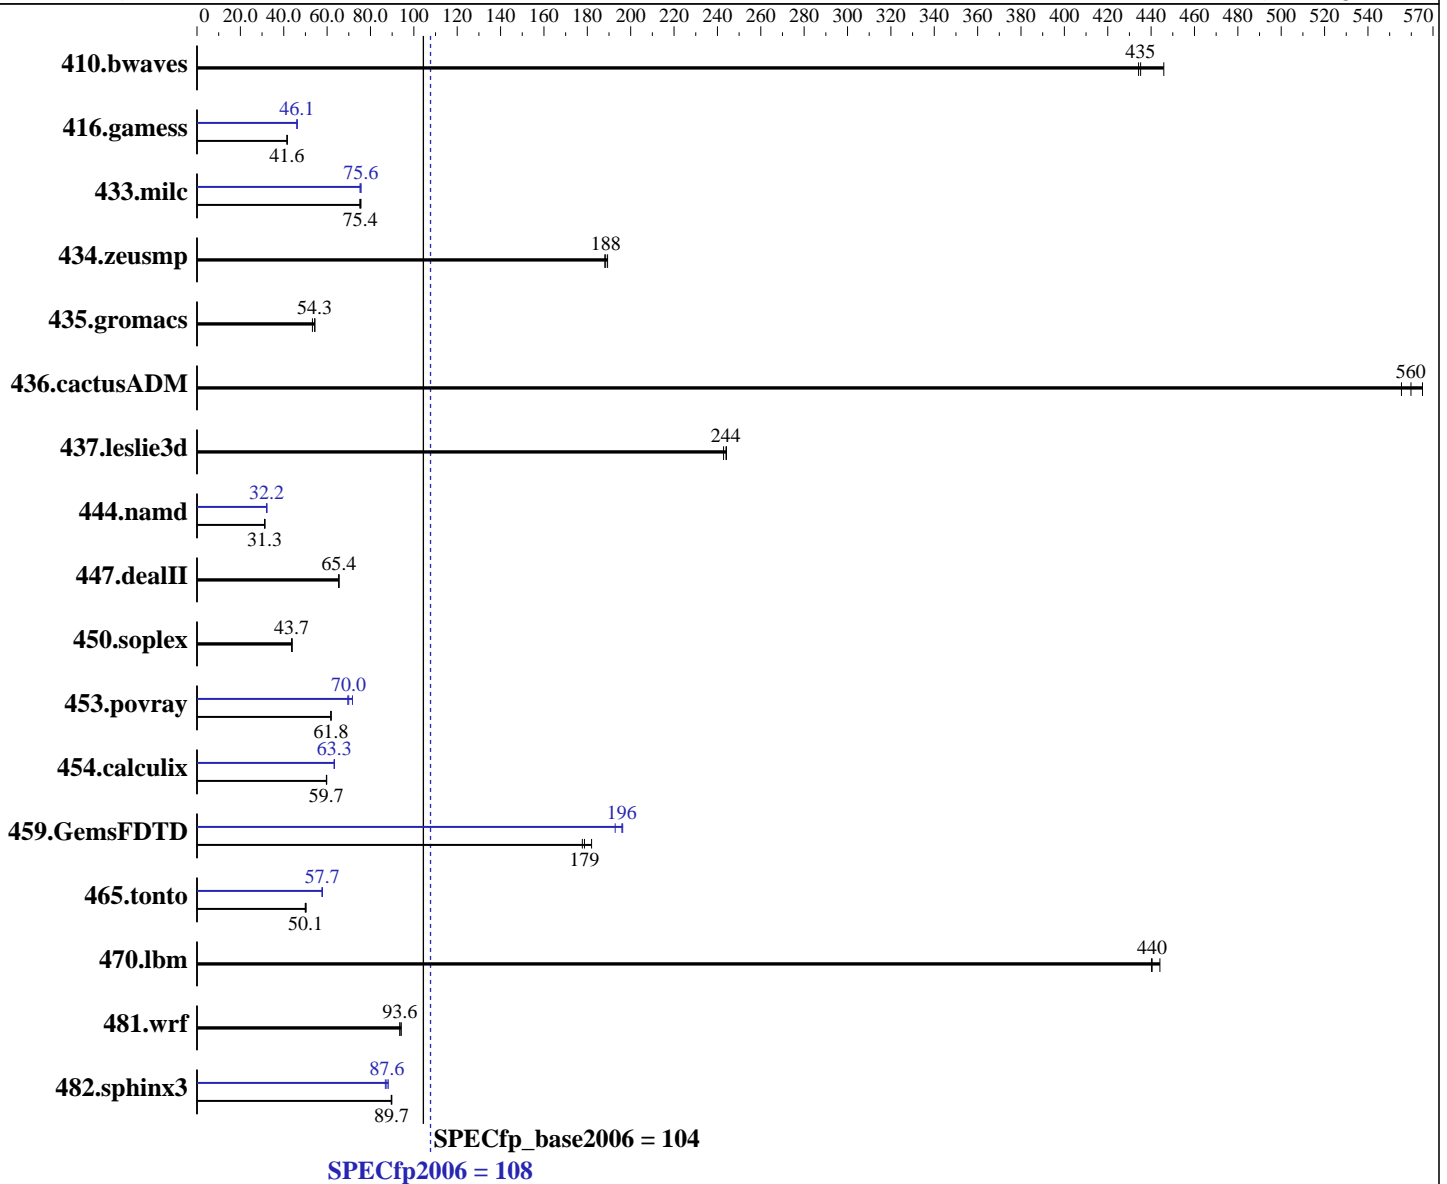

### Hardware

CPU Name: Intel Xeon E5-2637 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz  
 CPU MHz: 3500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.1 (Maipo)  
 3.10.0-229.11.1.el7.x86\_64  
 Compiler: C/C++: Version 16.0.0.047 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.0.047 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 S6 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp2006 = 108

SPECfp\_base2006 = 104

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Feb-2016

Hardware Availability: Sep-2014

Software Availability: Aug-2015

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 240 GB SATA II SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>31.2</u>	<u>435</u>	31.3	434	30.5	446	<u>31.2</u>	<u>435</u>	31.3	434	30.5	446
416.gamess	470	41.7	<u>471</u>	<u>41.6</u>	472	41.5	425	46.1	424	46.2	<u>425</u>	<u>46.1</u>
433.milc	<u>122</u>	<u>75.4</u>	122	75.1	121	75.6	121	75.6	122	75.2	<u>121</u>	<u>75.6</u>
434.zeusmp	<u>48.3</u>	<u>188</u>	48.4	188	48.1	189	<u>48.3</u>	<u>188</u>	48.4	188	48.1	189
435.gromacs	<u>132</u>	<u>54.3</u>	131	54.4	134	53.2	<u>132</u>	<u>54.3</u>	131	54.4	134	53.2
436.cactusADM	<u>21.3</u>	<u>560</u>	21.5	555	21.1	565	<u>21.3</u>	<u>560</u>	21.5	555	21.1	565
437.leslie3d	<u>38.5</u>	<u>244</u>	38.5	244	38.7	243	<u>38.5</u>	<u>244</u>	38.5	244	38.7	243
444.namd	257	31.2	257	31.3	<u>257</u>	<u>31.3</u>	<u>249</u>	<u>32.2</u>	249	32.2	249	32.2
447.dealII	175	65.4	175	65.4	<u>175</u>	<u>65.4</u>	175	65.4	175	65.4	<u>175</u>	<u>65.4</u>
450.soplex	<u>191</u>	<u>43.7</u>	191	43.7	190	43.9	<u>191</u>	<u>43.7</u>	191	43.7	190	43.9
453.povray	86.2	61.7	<u>86.1</u>	<u>61.8</u>	86.0	61.9	76.5	69.5	<u>76.0</u>	<u>70.0</u>	74.2	71.7
454.calculix	138	59.8	<u>138</u>	<u>59.7</u>	138	59.7	130	63.4	130	63.3	<u>130</u>	<u>63.3</u>
459.GemsFDTD	59.7	178	58.3	182	<u>59.4</u>	<u>179</u>	54.0	196	55.0	193	<u>54.2</u>	<u>196</u>
465.tonto	<u>197</u>	<u>50.1</u>	196	50.3	197	49.9	171	57.7	170	57.9	<u>170</u>	<u>57.7</u>
470.lbm	30.9	444	31.2	440	<u>31.2</u>	<u>440</u>	30.9	444	31.2	440	<u>31.2</u>	<u>440</u>
481.wrf	119	93.6	<u>119</u>	<u>93.6</u>	119	94.2	119	93.6	<u>119</u>	<u>93.6</u>	119	94.2
482.sphinx3	218	89.6	217	89.8	<u>217</u>	<u>89.7</u>	<u>223</u>	<u>87.6</u>	221	88.2	224	86.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings  
Hyper-Threading (All) = Disable  
Power Technology = Energy Efficient  
Enforce POR = Disabled  
Memory Frequency = 2133

BMC Setting  
Fan Mode = Full Speed

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

SPECfp2006 = 108

ACTINA SOLAR 220 S6 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp\_base2006 = 104

CPU2006 license: 9008

Test date: Feb-2016

Test sponsor: ACTION S.A.

Hardware Availability: Sep-2014

Tested by: ACTION S.A.

Software Availability: Aug-2015

### Platform Notes (Continued)

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 # \$ e86d102572650a6e4d596a3cee98f191  
running on SUT Thu Feb 11 21:01:44 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2637 v3 @ 3.50GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings  : 4
  physical 0: cores 0 1 4 5
  physical 1: cores 0 1 4 5
cache size : 15360 KB
```

```
From /proc/meminfo
MemTotal:      263869960 kB
HugePages_Total:      1
Hugepagesize:      2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
os-release.rpmnew:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.1 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.1"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server
```

```
uname -a:
Linux SUT 3.10.0-229.11.1.el7.x86_64 #5 SMP Mon Sep 14 17:11:19 CEST 2015
x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 S6 (Intel Xeon E5-2637 v3, 3.50 GHz)

**SPECfp2006 = 108**

**SPECfp\_base2006 = 104**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Feb-2016

**Hardware Availability:** Sep-2014

**Software Availability:** Aug-2015

## Platform Notes (Continued)

run-level 3 Feb 11 15:59

SPEC is set to: /cpu2006.1.2

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext4	212G	38G	163G	19%	/

Additional information from dmidecode:

BIOS American Megatrends Inc. 1.1 08/13/2015

Memory:

16x 16 GB

16x Micron 36ASF2G72PZ-2G1A2 16 GB 2133 MHz 2 rank

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

OMP\_NUM\_THREADS = "8"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v3 chips + 256 GB memory using RedHat EL 7.1

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 220 S6 (Intel Xeon E5-2637 v3, 3.50 GHz)

**SPECfp2006 = 108**

**SPECfp\_base2006 = 104**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Feb-2016

**Hardware Availability:** Sep-2014

**Software Availability:** Aug-2015

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

```

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

```

## Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 220 S6 (Intel Xeon E5-2637 v3, 3.50 GHz)

**SPECfp2006 = 108**

**SPECfp\_base2006 = 104**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Feb-2016

**Hardware Availability:** Sep-2014

**Software Availability:** Aug-2015

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32 -ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 S6 (Intel Xeon E5-2637 v3, 3.50 GHz)

SPECfp2006 = 108

SPECfp\_base2006 = 104

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Feb-2016

Hardware Availability: Sep-2014

Software Availability: Aug-2015

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevD-aug-2015-For-Supermicro-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Mar 8 12:33:00 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 March 2016.