



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 532

Express5800/E120g-M (Intel Xeon E5-2650 v4)

SPECint_rate_base2006 = 509

CPU2006 license: 9006


Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

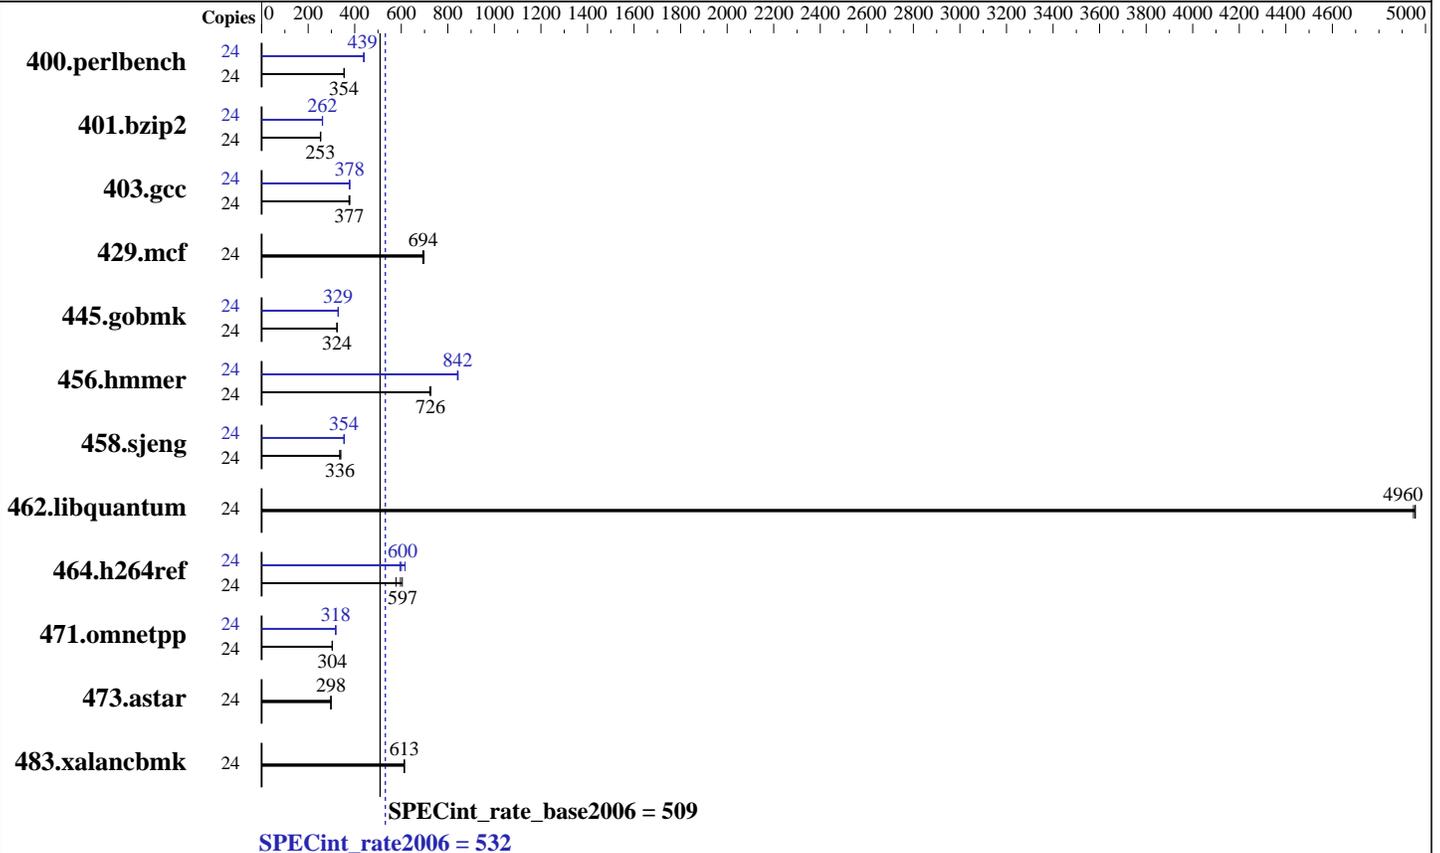

Hardware

CPU Name: Intel Xeon E5-2650 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 12 cores, 1 chip, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Kernel 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 532

Express5800/E120g-M (Intel Xeon E5-2650 v4)

SPECint_rate_base2006 = 509

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	24	660	355	662	354	662	354	24	535	438	535	439	531	441		
401.bzip2	24	917	253	917	253	910	254	24	888	261	885	262	885	262		
403.gcc	24	513	377	509	379	514	376	24	509	379	511	378	513	377		
429.mcf	24	316	693	315	694	314	698	24	316	693	315	694	314	698		
445.gobmk	24	777	324	777	324	777	324	24	766	329	763	330	766	329		
456.hammer	24	308	726	308	727	310	722	24	266	842	265	844	266	841		
458.sjeng	24	863	336	853	341	864	336	24	821	354	820	354	817	355		
462.libquantum	24	100	4960	100	4960	100	4950	24	100	4960	100	4960	100	4950		
464.h264ref	24	879	605	890	597	920	577	24	885	600	862	616	894	594		
471.omnetpp	24	494	304	495	303	493	304	24	472	318	472	318	470	319		
473.astar	24	566	298	564	299	566	297	24	566	298	564	299	566	297		
483.xalancbmk	24	270	614	270	613	270	613	24	270	614	270	613	270	613		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance
Patrol Scrub: Disabled

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 532

Express5800/E120g-M (Intel Xeon E5-2650 v4)

SPECint_rate_base2006 = 509

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
 401.bzip2: -D_FILE_OFFSET_BITS=64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hmmer: -D_FILE_OFFSET_BITS=64
 458.sjeng: -D_FILE_OFFSET_BITS=64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 532

Express5800/E120g-M (Intel Xeon E5-2650 v4)

SPECint_rate_base2006 = 509

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
 401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
 403.gcc: `-D_FILE_OFFSET_BITS=64`
 429.mcf: `-D_FILE_OFFSET_BITS=64`
 445.gobmk: `-D_FILE_OFFSET_BITS=64`
 456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
 458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
 462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
 464.h264ref: `-D_FILE_OFFSET_BITS=64`
 471.omnetpp: `-D_FILE_OFFSET_BITS=64`
 473.astar: `-D_FILE_OFFSET_BITS=64`
 483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`
`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`
`-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32`

401.bzip2: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`
`-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)`
`-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch`
`-auto-ilp32 -ansi-alias`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)`
`-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias`
`-opt-mem-layout-trans=3`

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 532

Express5800/E120g-M (Intel Xeon E5-2650 v4)

SPECint_rate_base2006 = 509

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

456.hmmcr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevB.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 532

Express5800/E120g-M (Intel Xeon E5-2650 v4)

SPECint_rate_base2006 = 509

CPU2006 license: 9006

Test date: Feb-2016

Test sponsor: NEC Corporation

Hardware Availability: Apr-2016

Tested by: NEC Corporation

Software Availability: Nov-2015

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:12:07 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.