SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-MT
(X11SSH-TF , Intel Xeon E3-1235L v5)

SPECint®_rate2006 = 175

SPECint_rate_base2006 = 170

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jan-2016
Hardware Availability: Oct-2015
Software Availability: Sep-2015

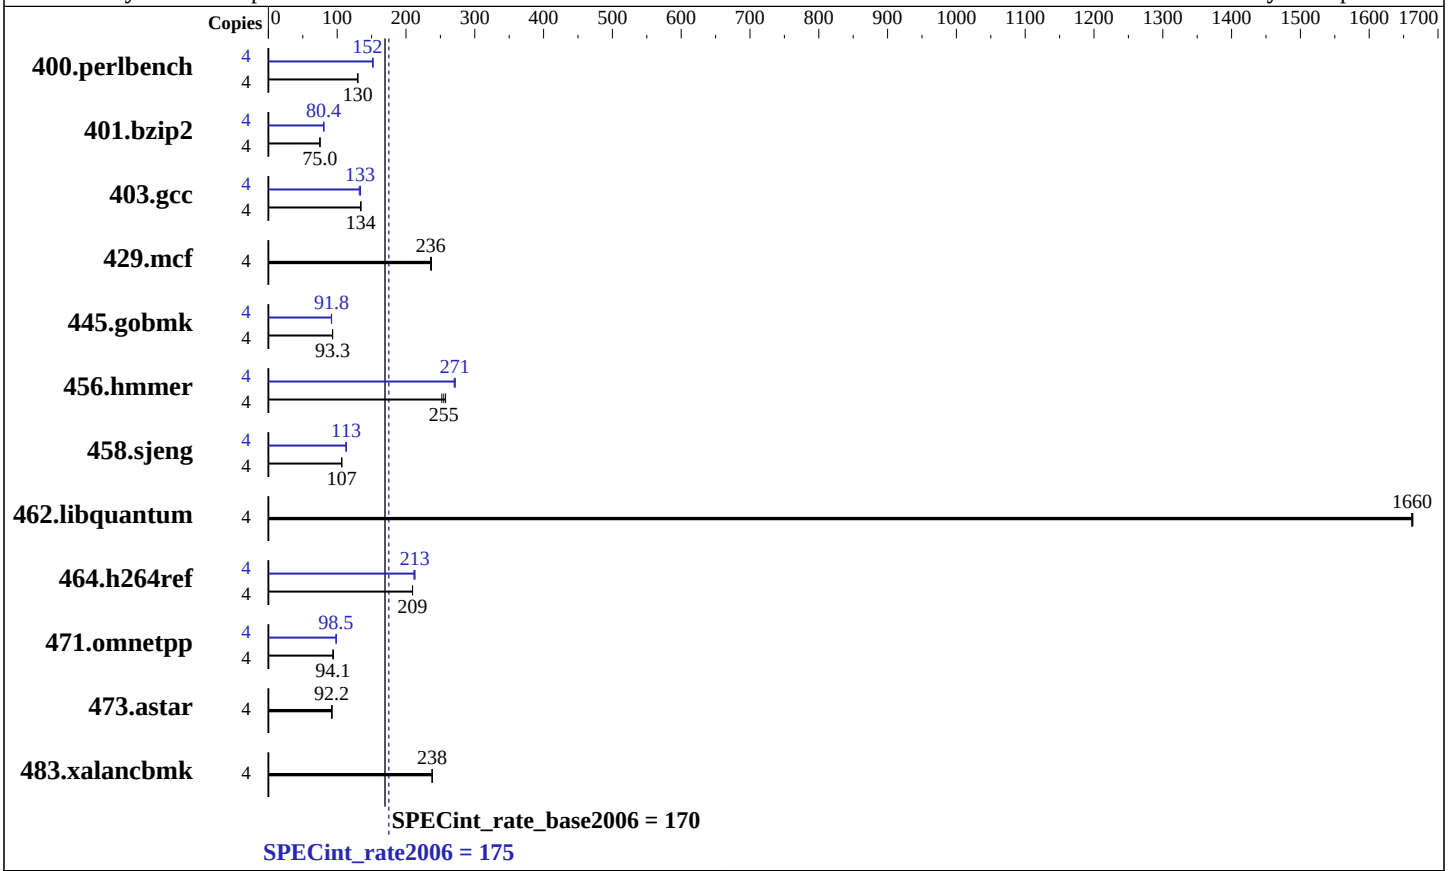

Hardware

CPU Name:	Intel Xeon E3-1235L v5
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC4-2133P-U)
Disk Subsystem:	1 x 400 GB SATA III SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 Kernel 3.10.0-el7_X86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Supermicro

SuperServer 5019S-MT
(X11SSH-TF , Intel Xeon E3-1235L v5)

SPECint_rate2006 = 175

SPECint_rate_base2006 = 170

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Jan-2016
Hardware Availability: Oct-2015
Software Availability: Sep-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	301	130	301	130	**301**	**130**	4	257	152	**257**	**152**	258	151
401.bzip2	4	515	74.9	**515**	**75.0**	514	75.1	4	480	80.3	478	80.7	**480**	**80.4**
403.gcc	4	239	134	240	134	**240**	**134**	4	240	134	244	132	**241**	**133**
429.mcf	4	154	237	155	236	**155**	**236**	4	154	237	155	236	**155**	**236**
445.gobmk	4	450	93.3	**450**	**93.3**	450	93.3	4	458	91.6	**457**	**91.8**	457	91.9
456.hmmer	4	**146**	**255**	145	258	148	252	4	137	272	138	270	**138**	**271**
458.sjeng	4	**454**	**107**	454	107	454	107	4	428	113	**428**	**113**	428	113
462.libquantum	4	49.8	1660	**49.8**	**1660**	49.9	1660	4	49.8	1660	**49.8**	**1660**	49.9	1660
464.h264ref	4	422	210	423	209	**423**	**209**	4	418	212	416	213	**416**	**213**
471.omnetpp	4	**266**	**94.1**	265	94.2	266	94.1	4	254	98.4	**254**	**98.5**	253	98.7
473.astar	4	**305**	**92.2**	304	92.4	305	92.2	4	**305**	**92.2**	304	92.4	305	92.2
483.xalancbmk	4	116	238	116	238	**116**	**238**	4	116	238	116	238	**116**	**238**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Wed Jan  6 19:07:19 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1235L v5 @ 2.00GHz
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 4
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3
     cache size : 8192 KB

  From /proc/meminfo
     MemTotal:       16088400 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.2 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.2"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

  uname -a:
     Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29
     EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jan 6 19:02

  SPEC is set to: /home/cpu2006
     Filesystem            Type  Size  Used Avail Use% Mounted on
     /dev/mapper/rhel-root xfs   280G   27G  253G  10% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. T20151229190512 12/29/2015
    Memory:
     2x Micron 16ATF1G64AZ-2G1A2 8 GB 2 rank 2133 MHz
     2x Not Specified Not Specified

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

  Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
```

Continued on next page

General Notes (Continued)

```
memory using RedHat EL 7.1
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revH.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:14:02 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.