SPEC® CINT2006 Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant XL170r Gen9
(2.20 GHz, Intel Xeon E5-2699 v4)

SPECint®_rate2006 = 1670

SPECint_rate_base2006 = 1610

CPU2006 license: 3		**Test date:**	Mar-2016
Test sponsor:	HPE	**Hardware Availability:**	Mar-2016
Tested by:	HPE	**Software Availability:**	Aug-2015

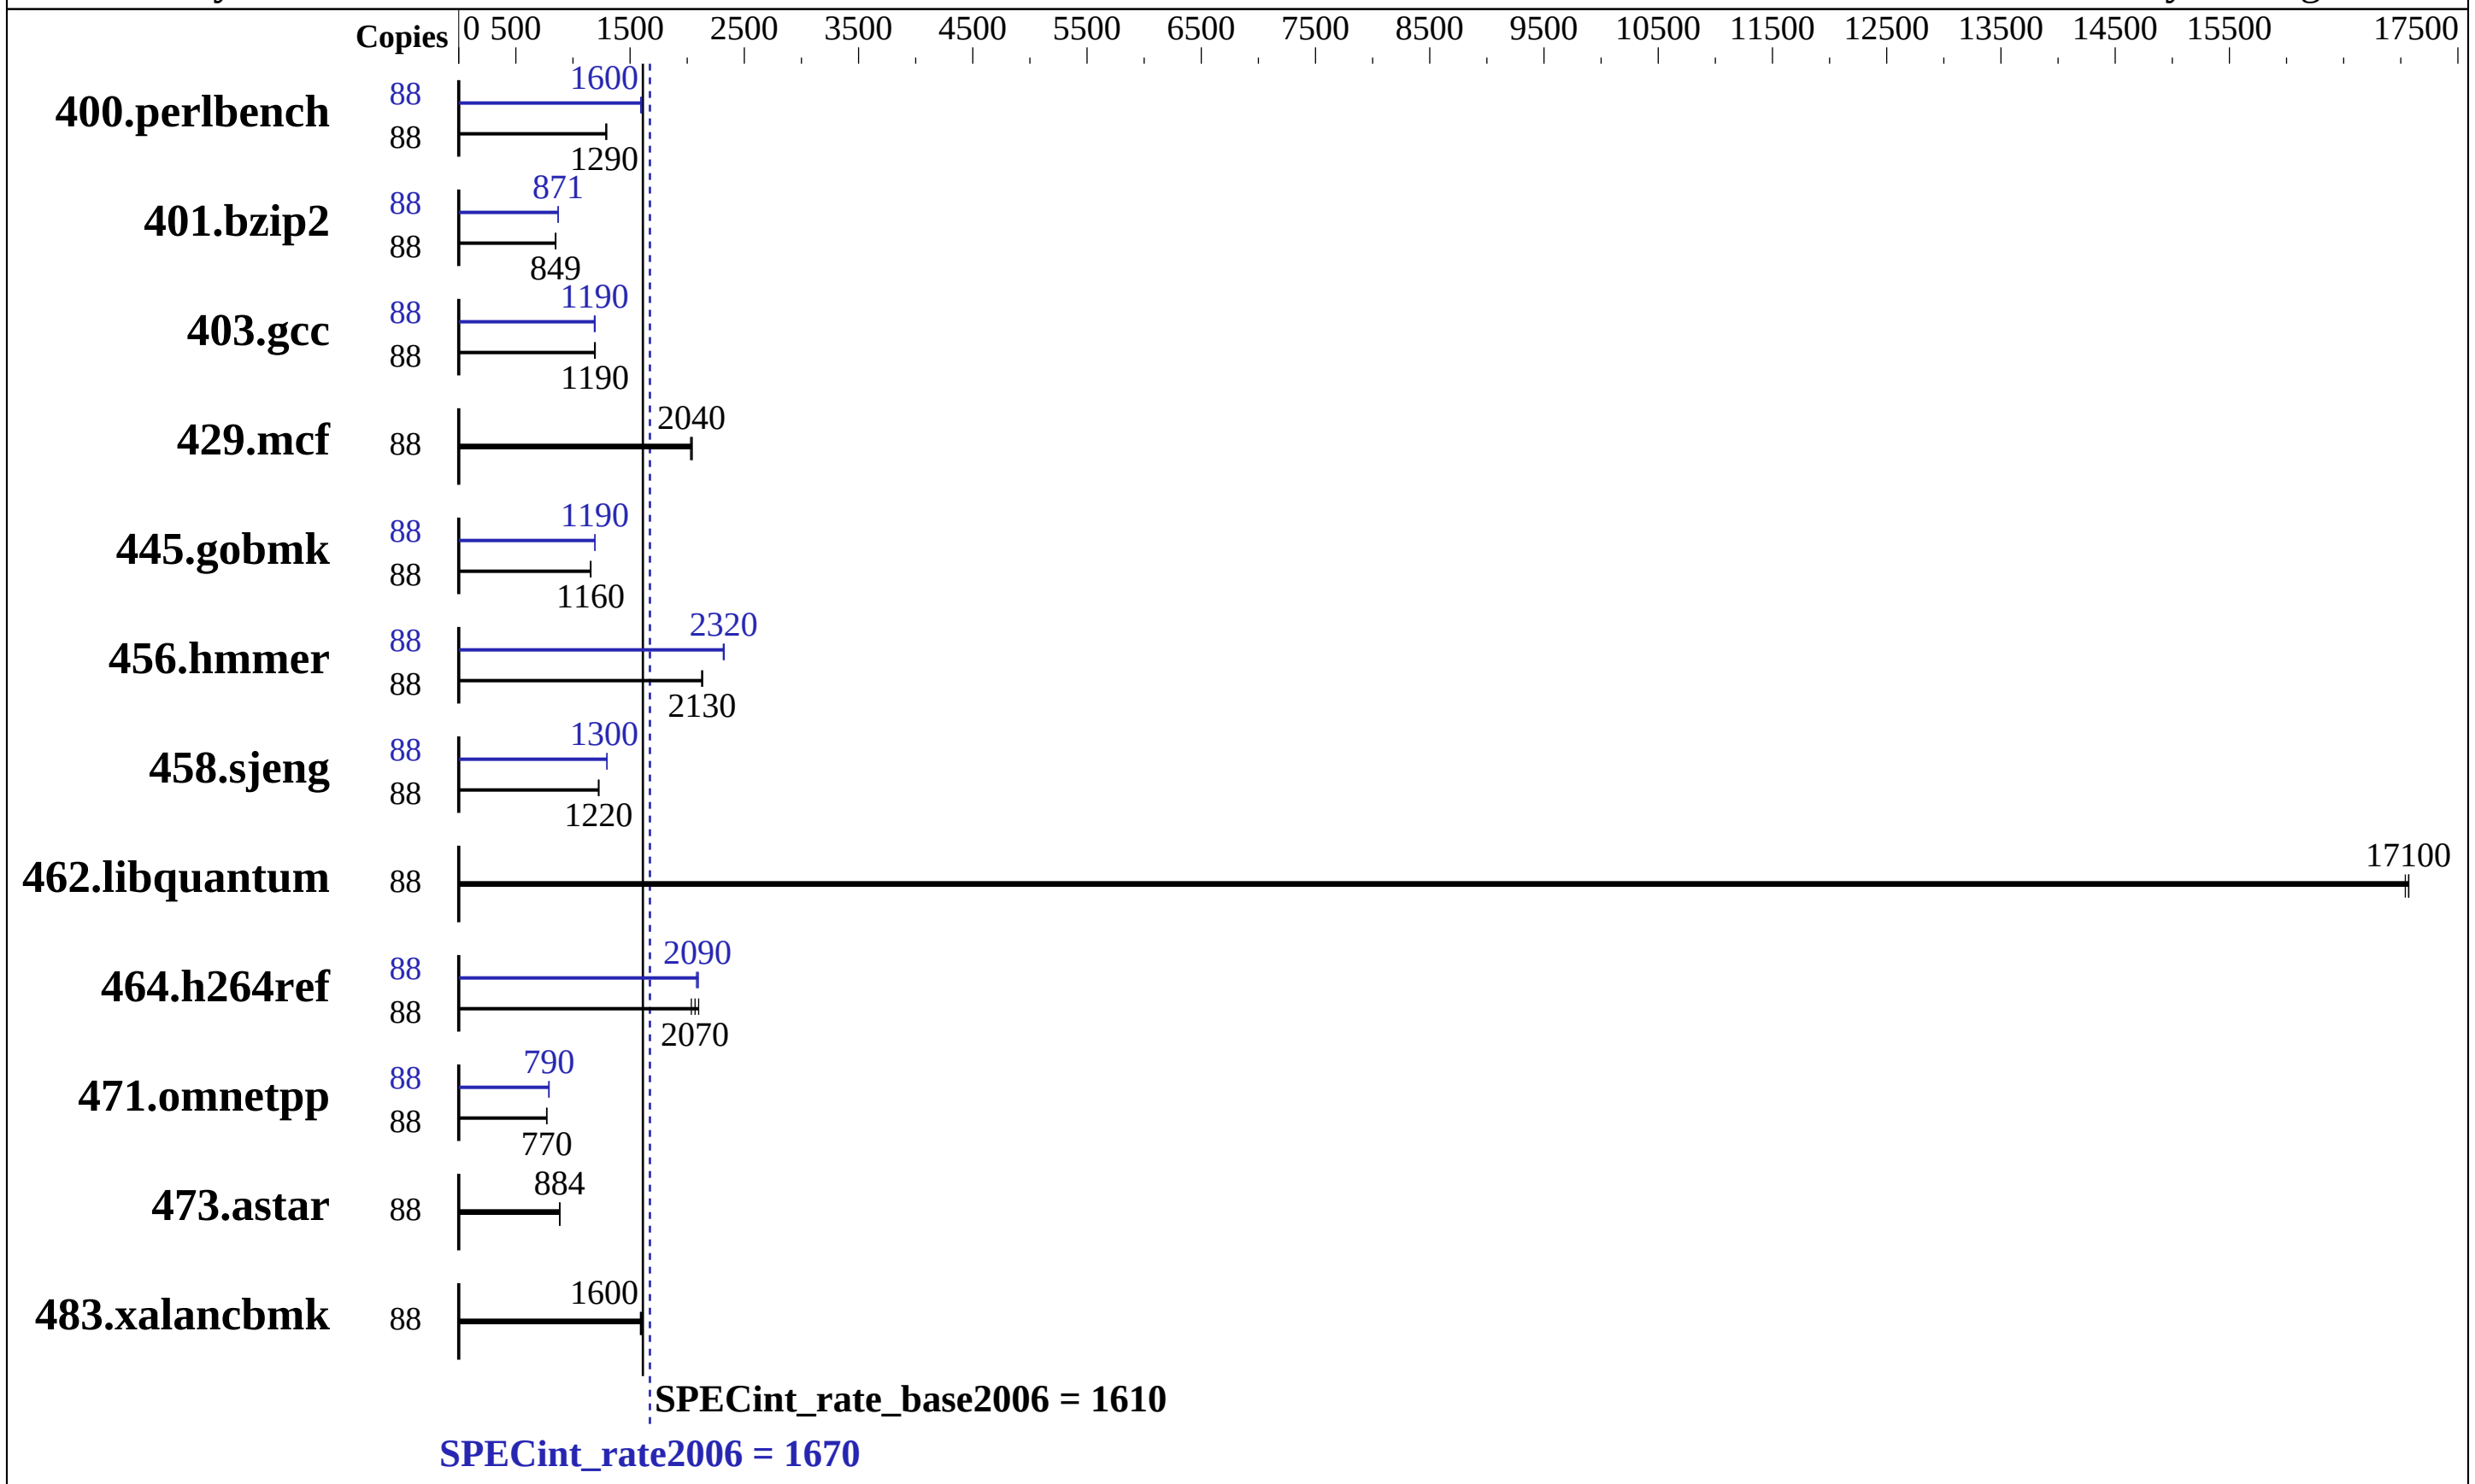

Hardware

CPU Name:	Intel Xeon E5-2699 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	44 cores, 2 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	55 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (8 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	2 x 400 GB SAS SSD, RAID 1
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) Kernel 3.12.43-52.6-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	btrfs
System State:	Run level 5 (multi-user with GUI)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	88	663	1300	**667**	**1290**	667	1290	88	540	1590	537	1600	**539**	**1600**
401.bzip2	88	999	850	**1001**	**849**	1002	847	88	977	870	**975**	**871**	974	872
403.gcc	88	595	1190	593	1200	**594**	**1190**	88	597	1190	**596**	**1190**	593	1190
429.mcf	88	**394**	**2040**	393	2040	395	2030	88	**394**	**2040**	393	2040	395	2030
445.gobmk	88	797	1160	**799**	**1160**	799	1150	88	774	1190	774	1190	**774**	**1190**
456.hmmer	88	**385**	**2130**	385	2130	386	2130	88	353	2320	355	2320	**354**	**2320**
458.sjeng	88	**870**	**1220**	867	1230	870	1220	88	**820**	**1300**	820	1300	821	1300
462.libquantum	88	107	17100	**107**	**17100**	107	17000	88	107	17100	**107**	**17100**	107	17000
464.h264ref	88	**941**	**2070**	927	2100	956	2040	88	929	2100	**932**	**2090**	936	2080
471.omnetpp	88	**714**	**770**	715	769	714	771	88	**696**	**790**	695	792	697	789
473.astar	88	698	885	**699**	**884**	699	883	88	698	885	**699**	**884**	699	883
483.xalancbmk	88	382	1590	**380**	**1600**	378	1610	88	382	1590	**380**	**1600**	378	1610

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Platform Notes

```
BIOS Configuration:
  HP Power Profile set to Custom
  HP Power Regulator to HP Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C6 State
  Minimum Processor Idle Power Package C-State set to No Package State
  QPI Snoop Configuration set to Cluster on Die
  Collaborative Power Control set to Disabled
  Thermal Configuration set to Maximum Cooling
  Processor Power and Utilization Monitoring set to Disabled
  Memory Refresh Rate set to 1x Refresh
Intel Hyperthreading set to Enabled
```

Continued on next page

Platform Notes (Continued)

```
Sysinfo program /cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on linux-gz1s Tue Mar  1 18:14:07 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz
      2 "physical id"s (chips)
      88 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 11
      siblings  : 22
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
      28
   cache size : 28160 KB

From /proc/meminfo
   MemTotal:       264257068 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 0
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12"
      VERSION_ID="12"
      PRETTY_NAME="SUSE Linux Enterprise Server 12"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
   Linux linux-gz1s 3.12.43-52.6-default #1 SMP Wed May 20 12:44:39 UTC 2015
   (fc0ceac) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
run-level 5 Mar 1 18:12

SPEC is set to: /cpu2006
   Filesystem     Type   Size  Used Avail Use% Mounted on
   /dev/sda3      btrfs  369G  190G  178G  52% /
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HP U14 02/22/2016
  Memory:
   8x UNKNOWN NOT AVAILABLE
   8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 256 GB and the dmidecode description should have one line reading as:
8x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
```

Base Compiler Invocation

C benchmarks:
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Base Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64

Continued on next page

Base Portability Flags (Continued)

458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:14:20 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2016.