SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

QuantaGrid D51PH-1ULH (Intel Xeon E5-2698 v3)

SPECint®2006 = 69.4

SPECint_base2006 = 66.6

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Mar-2016
Hardware Availability: Oct-2015
Software Availability: Oct-2015

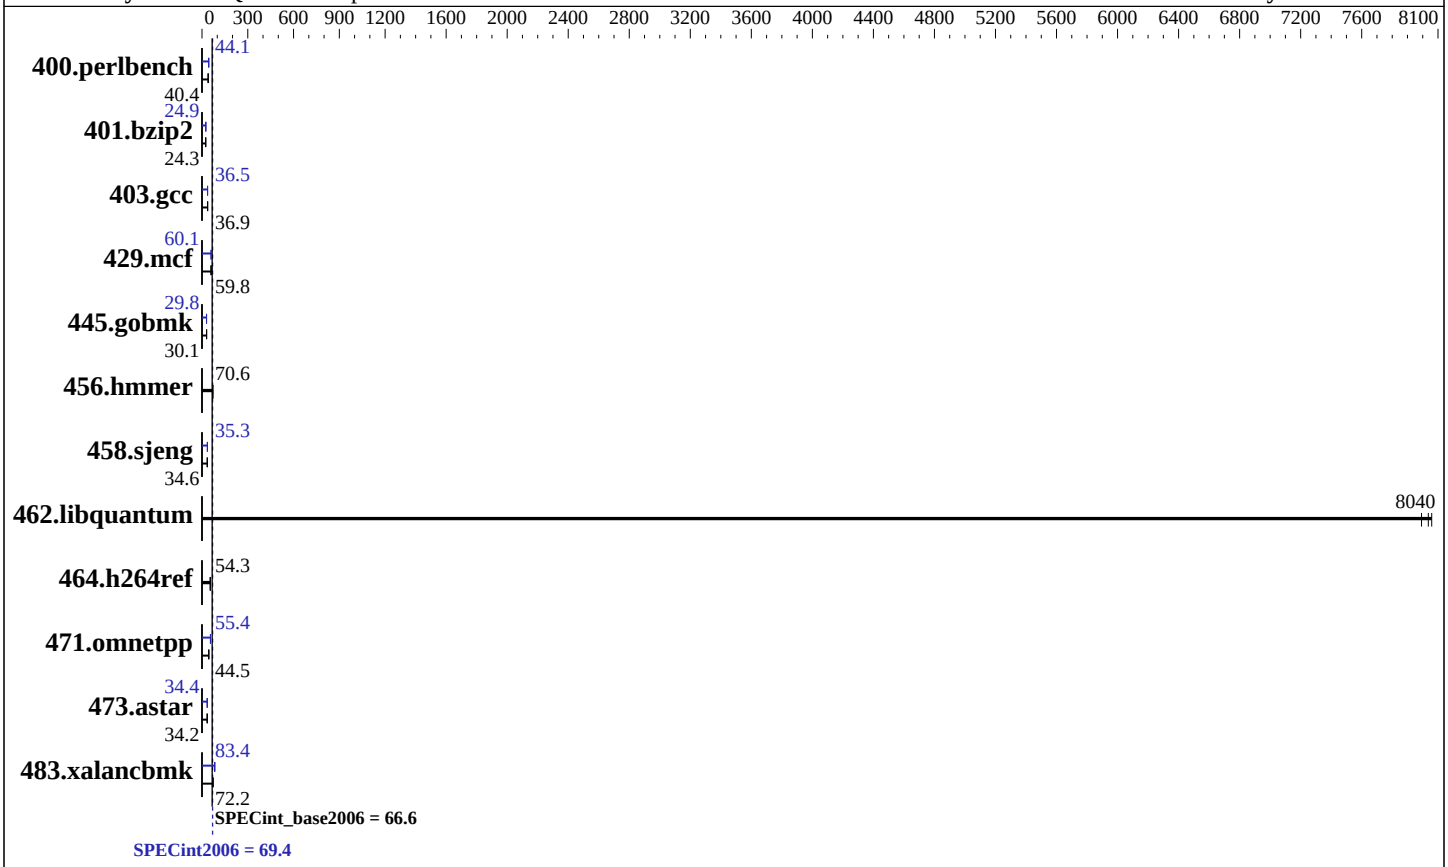

Hardware

CPU Name:	Intel Xeon E5-2698 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	40 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 440 GB SATA SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo) 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 5 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

QuantaGrid D51PH-1ULH (Intel Xeon E5-2698 v3)

SPECint2006 = 69.4

SPECint_base2006 = 66.6

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Mar-2016
Hardware Availability: Oct-2015
Software Availability: Oct-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**242**	**40.4**	242	40.3	240	40.7	222	44.1	**222**	**44.1**	222	44.0
401.bzip2	396	24.4	**398**	**24.3**	398	24.2	387	24.9	387	24.9	**387**	**24.9**
403.gcc	218	36.9	218	36.9	**218**	**36.9**	**221**	**36.5**	220	36.6	221	36.5
429.mcf	153	59.5	**153**	**59.8**	152	60.0	151	60.2	152	59.9	**152**	**60.1**
445.gobmk	348	30.1	**348**	**30.1**	348	30.1	352	29.8	352	29.8	**352**	**29.8**
456.hmmer	**132**	**70.6**	132	70.7	132	70.5	**132**	**70.6**	132	70.7	132	70.5
458.sjeng	350	34.6	**349**	**34.6**	349	34.6	**343**	**35.3**	343	35.3	343	35.2
462.libquantum	2.57	8060	**2.58**	**8040**	2.59	7990	2.57	8060	**2.58**	**8040**	2.59	7990
464.h264ref	**408**	**54.3**	405	54.7	409	54.1	**408**	**54.3**	405	54.7	409	54.1
471.omnetpp	140	44.7	**140**	**44.5**	141	44.2	112	55.6	113	55.3	**113**	**55.4**
473.astar	**205**	**34.2**	206	34.0	205	34.3	**204**	**34.4**	205	34.3	203	34.5
483.xalancbmk	95.4	72.3	95.8	72.0	**95.5**	**72.2**	**82.7**	**83.4**	83.2	82.9	82.2	84.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
 BIOS Settings:
 Snoop Mode: COD
 BMC Settings:
 Fan Mode: Full Speed
Sysinfo program /home/speccpu/Desktop/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Mar 18 16:58:22 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2698 v3 @ 2.30GHz
      2 "physical id"s (chips)
      64 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
```

Continued on next page

Platform Notes (Continued)

```
        cpu cores : 16
        siblings  : 32
        physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
        physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
     cache size : 40960 KB

  From /proc/meminfo
     MemTotal:       131752248 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     os-release:
        NAME="Red Hat Enterprise Linux Server"
        VERSION="7.1 (Maipo)"
        ID="rhel"
        ID_LIKE="fedora"
        VERSION_ID="7.1"
        PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
        ANSI_COLOR="0;31"
        CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
     redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
     system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

  uname -a:
     Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
     EST 2015 x86_64 x86_64 x86_64 GNU/Linux

  run-level 5 Mar 18 14:43

  SPEC is set to: /home/speccpu/Desktop/cpu2006-1.2
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      xfs   440G  278G  163G  64% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS American Megatrends Inc. S2P_3A03 12/26/2014
    Memory:
     8x NO DIMM NO DIMM
     8x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/speccpu/Desktop/cpu2006-1.2/libs/32:/home/speccpu/Desktop/cpu2006-1.2/libs/64:/home/speccpu/Desktop/cpu2006-1.2/sh"
OMP_NUM_THREADS = "32"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
  401.bzip2: -DSPEC_CPU_LP64
    403.gcc: -DSPEC_CPU_LP64
    429.mcf: -DSPEC_CPU_LP64
  445.gobmk: -DSPEC_CPU_LP64
  456.hmmer: -DSPEC_CPU_LP64
  458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
  464.h264ref: -DSPEC_CPU_LP64
  471.omnetpp: -DSPEC_CPU_LP64
    473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1)
`-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)
`-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-opt-prefetch`
`-ansi-alias`

401.bzip2: `-xCORE-AVX2`(pass 2) `-prof-gen:threadsafe`(pass 1)
`-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`
`-par-num-threads=1`(pass 1) `-prof-use`(pass 2) `-auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2 (continued):
-opt-prefetch -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.1.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:26:52 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 May 2016.