SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

QuantaGrid D51PH-1ULH (Intel Xeon E5-2698 v3)

SPECfp®2006 = 117

SPECfp_base2006 = 111

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Mar-2016
Hardware Availability: Oct-2015
Software Availability: Oct-2015

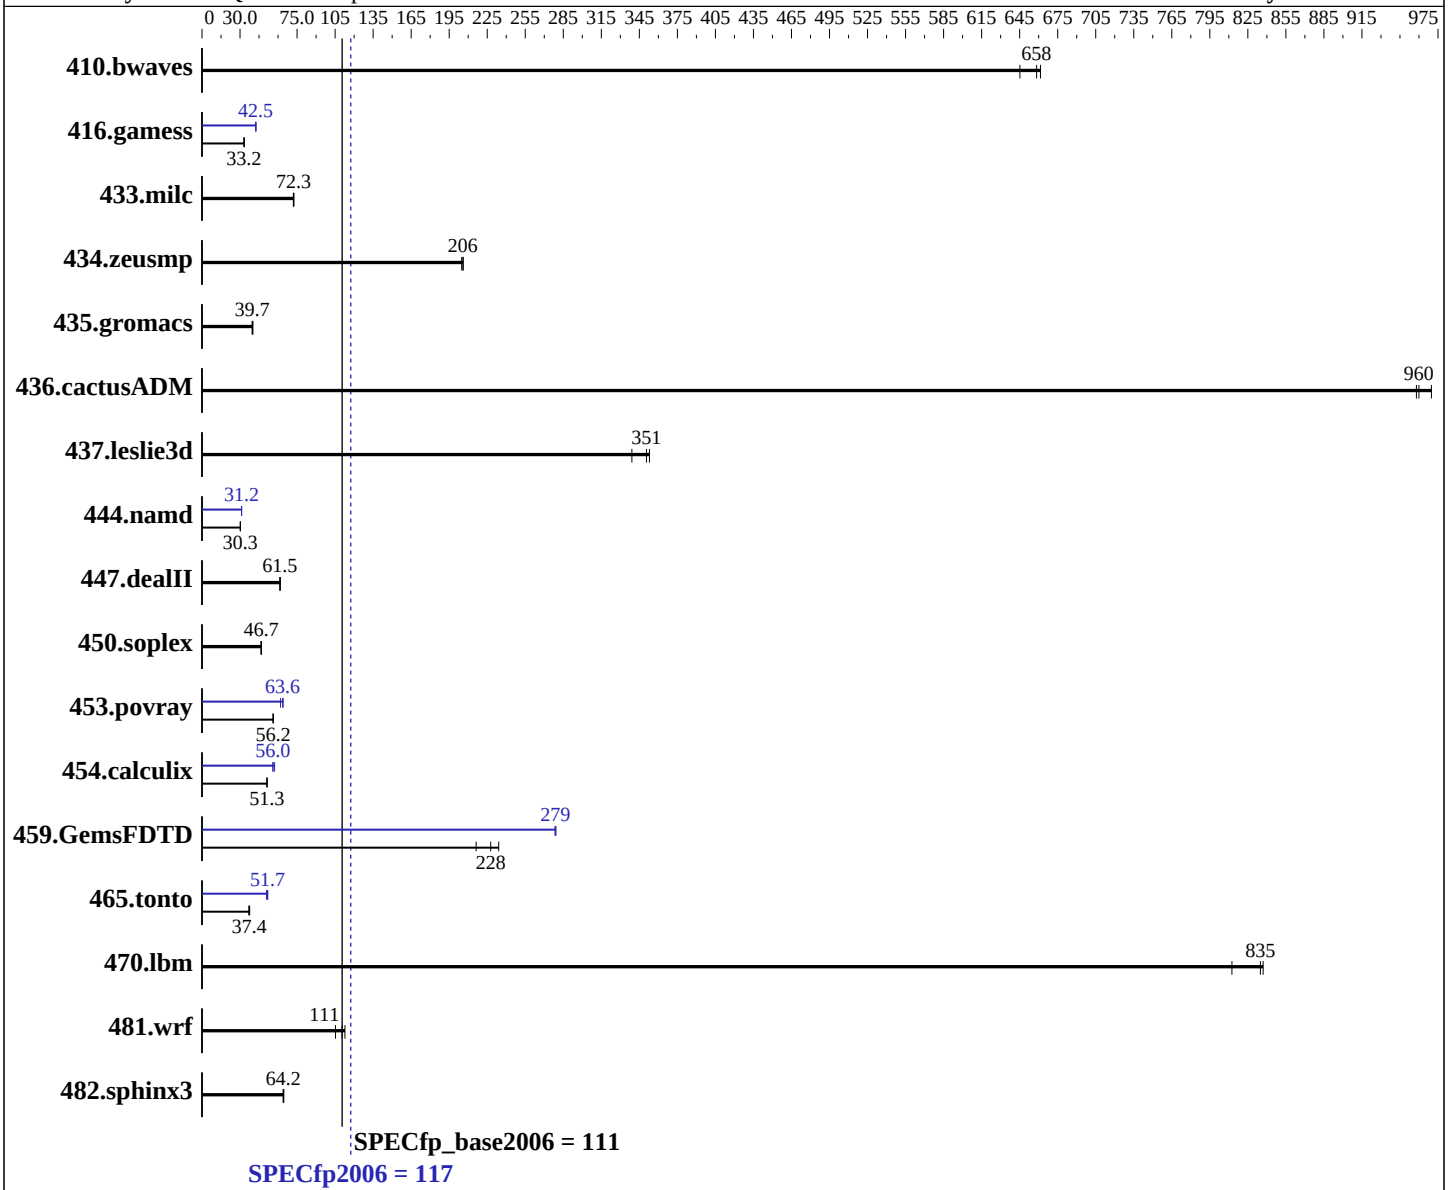

Hardware

CPU Name:	Intel Xeon E5-2698 v3
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.1 (Maipo) 3.10.0-229.el7.x86_64
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Quanta Computer Inc.

QuantaGrid D51PH-1ULH (Intel Xeon E5-2698 v3)

SPECfp2006 = 117

SPECfp_base2006 = 111

CPU2006 license: 9050
Test sponsor: Quanta Computer Inc.
Tested by: Quanta Computer Inc.

Test date: Mar-2016
Hardware Availability: Oct-2015
Software Availability: Oct-2015

L3 Cache:	40 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem:	1 x 440 GB SATA SSD
Other Hardware:	None

System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	21.1	645	20.5	661	**20.6**	**658**	21.1	645	20.5	661	**20.6**	**658**
416.gamess	587	33.3	**589**	**33.2**	591	33.1	**461**	**42.5**	461	42.5	461	42.4
433.milc	**127**	**72.3**	127	72.5	127	72.1	**127**	**72.3**	127	72.5	127	72.1
434.zeusmp	44.2	206	**44.2**	**206**	44.4	205	44.2	206	**44.2**	**206**	44.4	205
435.gromacs	178	40.2	180	39.7	**180**	**39.7**	178	40.2	180	39.7	**180**	**39.7**
436.cactusADM	**12.4**	**960**	12.5	958	12.3	970	**12.4**	**960**	12.5	958	12.3	970
437.leslie3d	26.6	353	27.7	339	**26.8**	**351**	26.6	353	27.7	339	**26.8**	**351**
444.namd	**265**	**30.3**	265	30.3	266	30.2	257	31.2	**257**	**31.2**	257	31.2
447.dealII	186	61.5	185	61.8	**186**	**61.5**	186	61.5	185	61.8	**186**	**61.5**
450.soplex	178	46.8	**179**	**46.7**	179	46.7	178	46.8	**179**	**46.7**	179	46.7
453.povray	95.0	56.0	**94.7**	**56.2**	94.5	56.3	83.1	64.0	**83.7**	**63.6**	85.9	61.9
454.calculix	161	51.3	**161**	**51.3**	161	51.3	**147**	**56.0**	144	57.3	148	55.9
459.GemsFDTD	45.3	234	49.1	216	**46.6**	**228**	38.0	279	**38.0**	**279**	38.1	278
465.tonto	**263**	**37.4**	267	36.9	262	37.6	193	50.9	**190**	**51.7**	190	51.9
470.lbm	16.9	812	16.4	837	**16.5**	**835**	16.9	812	16.4	837	**16.5**	**835**
481.wrf	**101**	**111**	99.1	113	106	105	**101**	**111**	99.1	113	106	105
482.sphinx3	302	64.5	305	64.0	**303**	**64.2**	302	64.5	305	64.0	**303**	**64.2**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
 BIOS Settings:
 Snoop Mode: COD
 BMC Settings:
 Fan Mode: Full Speed
Sysinfo program /home/speccpu/Desktop/cpu2006-1.2/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Fri Mar 18 21:54:25 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
```

Continued on next page

Platform Notes (Continued)

```
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-2698 v3 @ 2.30GHz
          2 "physical id"s (chips)
          64 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 16
          siblings  : 32
          physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
          physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
       cache size : 40960 KB

    From /proc/meminfo
       MemTotal:       131752248 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       os-release:
          NAME="Red Hat Enterprise Linux Server"
          VERSION="7.1 (Maipo)"
          ID="rhel"
          ID_LIKE="fedora"
          VERSION_ID="7.1"
          PRETTY_NAME="Red Hat Enterprise Linux Server 7.1 (Maipo)"
          ANSI_COLOR="0;31"
          CPE_NAME="cpe:/o:redhat:enterprise_linux:7.1:GA:server"
       redhat-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
       system-release: Red Hat Enterprise Linux Server release 7.1 (Maipo)
       system-release-cpe: cpe:/o:redhat:enterprise_linux:7.1:ga:server

    uname -a:
       Linux localhost.localdomain 3.10.0-229.el7.x86_64 #1 SMP Thu Jan 29 18:37:38
       EST 2015 x86_64 x86_64 x86_64 GNU/Linux

    run-level 5 Mar 18 14:43

    SPEC is set to: /home/speccpu/Desktop/cpu2006-1.2
       Filesystem     Type  Size  Used Avail Use% Mounted on
       /dev/sda2      xfs   440G  279G  162G  64% /
    Additional information from dmidecode:

       Warning: Use caution when you interpret this section. The 'dmidecode' program
       reads system data which is "intended to allow hardware to be accurately
       determined", but the intent may not be met, as there are frequent changes to
       hardware, firmware, and the "DMTF SMBIOS" standard.

      BIOS American Megatrends Inc. S2P_3A03 12/26/2014
      Memory:
```

Continued on next page

Platform Notes (Continued)

```
      8x NO DIMM NO DIMM
      8x Samsung M393A2G40DB0-CPB 16 GB 2 rank 2133 MHz

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/home/speccpu/Desktop/cpu2006-1.2/libs/32:/home/speccpu/Desktop/cpu2006-1.2/libs/64:/home/speccpu/Desktop/cpu2006-1.2/sh"
OMP_NUM_THREADS = "32"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
      444.namd: -DSPEC_CPU_LP64
     447.dealII: -DSPEC_CPU_LP64
     450.soplex: -DSPEC_CPU_LP64
     453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html
http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml
http://www.spec.org/cpu2006/flags/Quanta-Computer-Inc-Platform-Settings-V1.1.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 13:26:50 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 May 2016.