



# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2699 v4, 2.20 GHz

SPECint®\_rate2006 = 1820

SPECint\_rate\_base2006 = 1750

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Feb-2016

Hardware Availability: Apr-2016

Software Availability: Sep-2015

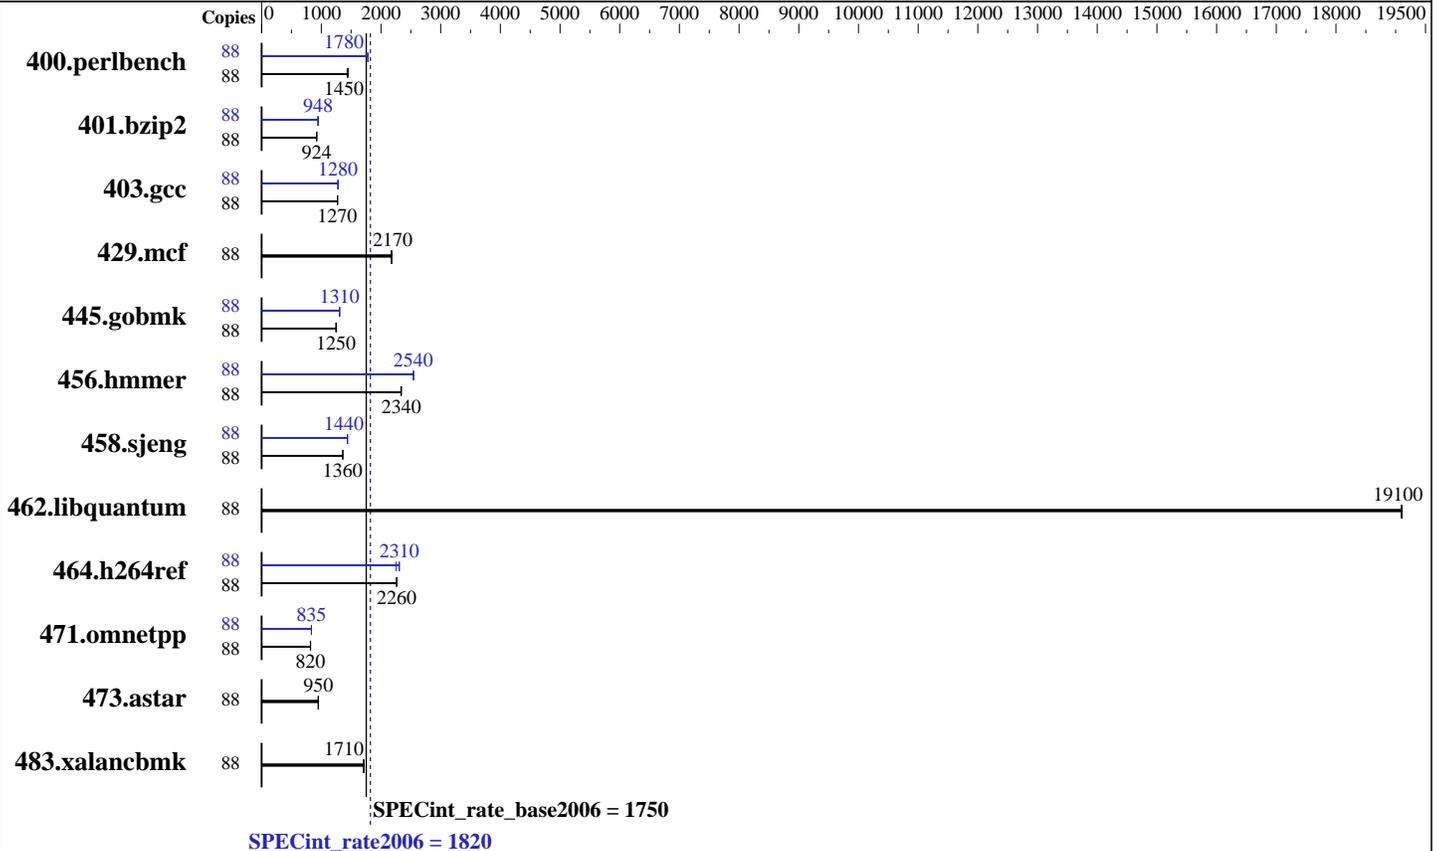

### Hardware

CPU Name: Intel Xeon E5-2699 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 44 cores, 2 chips, 22 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 55 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 12 SP1 (x86\_64)  
 Kernel 3.12.49-11-default  
 Compiler: C/C++; Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.2



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2699 v4, 2.20 GHz

SPECint\_rate2006 = 1820

SPECint\_rate\_base2006 = 1750

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Feb-2016  
Hardware Availability: Apr-2016  
Software Availability: Sep-2015

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	88	594	1450	600	1430	<u>595</u>	<u>1450</u>	88	<u>483</u>	<u>1780</u>	483	1780	483	1780
401.bzip2	88	923	920	<u>919</u>	<u>924</u>	918	925	88	902	941	895	949	<u>896</u>	<u>948</u>
403.gcc	88	556	1270	558	1270	<u>557</u>	<u>1270</u>	88	555	1280	<u>554</u>	<u>1280</u>	552	1280
429.mcf	88	368	2180	<u>369</u>	<u>2170</u>	369	2170	88	368	2180	<u>369</u>	<u>2170</u>	369	2170
445.gobmk	88	<u>740</u>	<u>1250</u>	740	1250	739	1250	88	705	1310	708	1300	<u>706</u>	<u>1310</u>
456.hammer	88	352	2330	351	2340	<u>351</u>	<u>2340</u>	88	322	2550	323	2540	<u>323</u>	<u>2540</u>
458.sjeng	88	783	1360	<u>783</u>	<u>1360</u>	783	1360	88	740	1440	<u>740</u>	<u>1440</u>	740	1440
462.libquantum	88	<u>95.5</u>	<u>19100</u>	95.5	19100	95.4	19100	88	<u>95.5</u>	<u>19100</u>	95.5	19100	95.4	19100
464.h264ref	88	860	2270	862	2260	<u>861</u>	<u>2260</u>	88	844	2310	<u>844</u>	<u>2310</u>	864	2250
471.omnetpp	88	670	820	<u>671</u>	<u>820</u>	673	817	88	658	836	<u>659</u>	<u>835</u>	660	834
473.astar	88	650	951	651	949	<u>650</u>	<u>950</u>	88	650	951	651	949	<u>650</u>	<u>950</u>
483.xalancbmk	88	<u>355</u>	<u>1710</u>	356	1700	354	1720	88	<u>355</u>	<u>1710</u>	356	1700	354	1720

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Energy Performance = Performance  
Utilization Profile = Unbalanced  
QPI snoop mode: Cluster on Die  
COD Enable = Enabled, Early Snoop = Disabled, Home Snoop Dir OSB = Disabled  
CPU C1E Support = Disabled  
Sysinfo program /home/BUNDLE/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1  
running on RX2540M2 Fri Feb 12 15:57:48 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2699 v4 @ 2.20GHz  
2 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2699 v4, 2.20 GHz

SPECint\_rate2006 = 1820

SPECint\_rate\_base2006 = 1750

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Feb-2016  
Hardware Availability: Apr-2016  
Software Availability: Sep-2015

### Platform Notes (Continued)

88 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 22
siblings  : 44
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
28
cache size : 28160 KB
```

```
From /proc/meminfo
MemTotal:      264393324 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP1
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

```
uname -a:
Linux RX2540M2 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 12 15:54 last=5
```

```
SPEC is set to: /home/BUNDLE
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   424G  67G  357G  16% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M2, Intel Xeon E5-2699 v4, 2.20 GHz

**SPECint\_rate2006 = 1820**

**SPECint\_rate\_base2006 = 1750**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Feb-2016  
**Hardware Availability:** Apr-2016  
**Software Availability:** Sep-2015

## Platform Notes (Continued)

BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.1.0 for D3289-B1x  
01/14/2016

Memory:  
16x Micron 36ASF2G72PZ-2G3A3 16 GB 2 rank 2400 MHz  
8x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/BUNDLE/libs/32:/home/BUNDLE/libs/64:/home/BUNDLE/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB  
memory using RedHat EL 7.1

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:  
icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmmer: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M2, Intel Xeon E5-2699 v4, 2.20 GHz

**SPECint\_rate2006 = 1820**

**SPECint\_rate\_base2006 = 1750**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Feb-2016  
**Hardware Availability:** Apr-2016  
**Software Availability:** Sep-2015

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Peak Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

403.gcc: -D\_FILE\_OFFSET\_BITS=64

429.mcf: -D\_FILE\_OFFSET\_BITS=64

445.gobmk: -D\_FILE\_OFFSET\_BITS=64

456.hmmer: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

458.sjeng: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LP64

462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

464.h264ref: -D\_FILE\_OFFSET\_BITS=64

471.omnetpp: -D\_FILE\_OFFSET\_BITS=64

473.astar: -D\_FILE\_OFFSET\_BITS=64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Fujitsu**

PRIMERGY RX2540 M2, Intel Xeon E5-2699 v4, 2.20 GHz

**SPECint\_rate2006 = 1820**

**SPECint\_rate\_base2006 = 1750**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Feb-2016  
**Hardware Availability:** Apr-2016  
**Software Availability:** Sep-2015

## Peak Portability Flags (Continued)

483.xalanbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu

PRIMERGY RX2540 M2, Intel Xeon E5-2699 v4, 2.20 GHz

SPECint\_rate2006 = 1820

SPECint\_rate\_base2006 = 1750

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Feb-2016  
Hardware Availability: Apr-2016  
Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Jun 1 19:09:33 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 June 2016.