SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R930 (Intel Xeon E7-4850 v4, 2.10 GHz)

SPECint®2006 = 59.9

SPECint_base2006 = 57.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2016
Hardware Availability: Jun-2016
Software Availability: Dec-2015

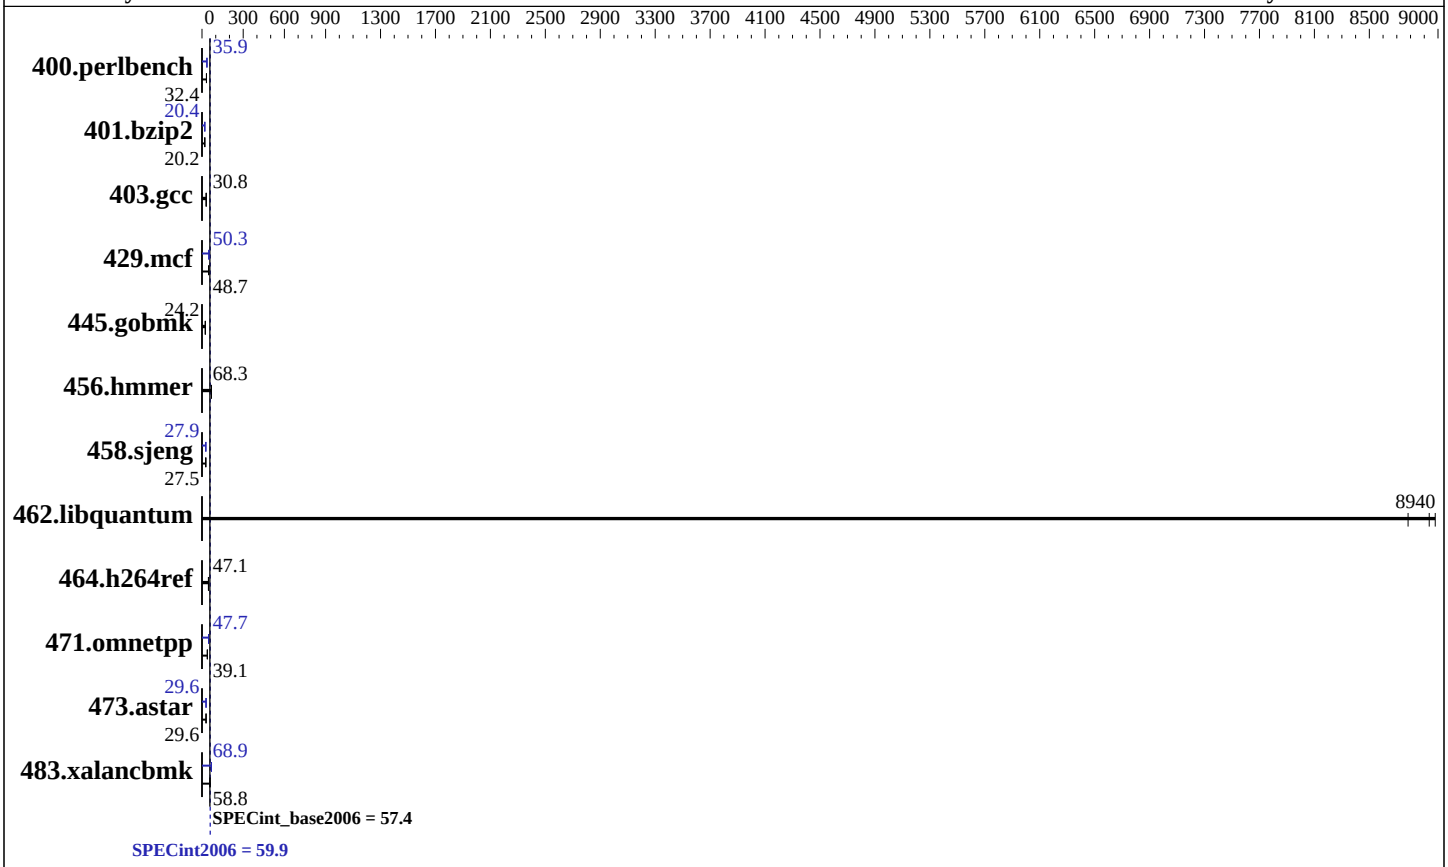

Hardware

CPU Name:	Intel Xeon E7-4850 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	64 cores, 4 chips, 16 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	40 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1333 MHz)
Disk Subsystem:	1 x 480 GB SAS SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R930 (Intel Xeon E7-4850 v4, 2.10 GHz)

SPECint2006 = 59.9

SPECint_base2006 = 57.4

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2016
Hardware Availability: Jun-2016
Software Availability: Dec-2015

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	302	32.4	**302**	**32.4**	298	32.8	272	35.9	272	35.9	**272**	**35.9**
401.bzip2	**478**	**20.2**	477	20.2	479	20.1	473	20.4	473	20.4	**473**	**20.4**
403.gcc	261	30.8	**262**	**30.8**	263	30.6	261	30.8	**262**	**30.8**	263	30.6
429.mcf	185	49.4	190	47.9	**187**	**48.7**	**181**	**50.3**	183	49.9	180	50.6
445.gobmk	434	24.2	**433**	**24.2**	433	24.2	434	24.2	**433**	**24.2**	433	24.2
456.hmmer	**137**	**68.3**	137	68.3	136	68.4	**137**	**68.3**	137	68.3	136	68.4
458.sjeng	440	27.5	439	27.5	**440**	**27.5**	435	27.8	**434**	**27.9**	434	27.9
462.libquantum	2.36	8780	2.31	8980	**2.32**	**8940**	2.36	8780	2.31	8980	**2.32**	**8940**
464.h264ref	471	47.0	**470**	**47.1**	470	47.1	471	47.0	**470**	**47.1**	470	47.1
471.omnetpp	159	39.3	**160**	**39.1**	162	38.6	131	47.6	131	47.7	**131**	**47.7**
473.astar	238	29.5	237	29.7	**237**	**29.6**	238	29.4	**237**	**29.6**	237	29.6
483.xalancbmk	122	56.5	117	59.0	**117**	**58.8**	100	68.7	100	69.0	**100**	**68.9**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Virtualization Technology Disabled
System Profile set to Custom
CPU Power Management set to Hardware P States
Memory Frequency set to Maximum Performance
Turbo Boost Enabled
Energy Efficient Turbo Enabled
C1E Disabled
C States set to Autonomous
Collaborative CPU Performance Control Disabled
Memory Patrol Scrub Disabled
Memory Refresh Rate set to 1x
Uncore Frequency set to Dynamic
Energy Efficient Policy set to Performance
Monitor/MWait Enabled
Snoop Mode set to Home Snoop
Sysinfo program /root/ic16.0_Sept12_2015/config/sysinfo.rev6914
$Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on bdx-perf04 Wed May 11 08:57:32 2016
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4850 v4 @ 2.10GHz
      4 "physical id"s (chips)
      128 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 16
      siblings  : 32
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
   cache size : 40960 KB

From /proc/meminfo
   MemTotal:       529322532 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux bdx-perf04 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 11 08:28

SPEC is set to: /root/ic16.0_Sept12_2015
```

Continued on next page

Platform Notes (Continued)

```
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      xfs   369G  9.8G  359G   3% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Dell Inc. 2.0.1 04/20/2016
    Memory:
     32x 00AD00B300AD HMA42GR7MFR4N-TF 16 GB 2 rank 2133 MHz, configured at 1333
     MHz
     64x Not Specified Not Specified

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/root/ic16.0_Sept12_2015/libs/32:/root/ic16.0_Sept12_2015/libs/64:/root/ic16.0_Sept12_2015/sh"
OMP_NUM_THREADS = "64"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc  -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
    401.bzip2: -DSPEC_CPU_LP64
      403.gcc: -DSPEC_CPU_LP64
      429.mcf: -DSPEC_CPU_LP64
    445.gobmk: -DSPEC_CPU_LP64
    456.hmmer: -DSPEC_CPU_LP64
    458.sjeng: -DSPEC_CPU_LP64
```

Continued on next page

Base Portability Flags (Continued)

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32`
`-Wl,-z,muldefs -L/sh -lsmartheap64`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

C++ benchmarks (except as noted below):
`icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: basepeak = yes

429.mcf: -xCORE-AVX2 -ipo -O3 -no-prec-div -parallel
-opt-prefetch -auto-p32

445.gobmk: basepeak = yes

456.hmmer: basepeak = yes

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh -lsmartheap64

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revD.20151006.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jul 26 16:13:00 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 July 2016.