# SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2637 v4, 3.50 GHz)

SPECint®_rate2006 = 502

SPECint_rate_base2006 = 476

**CPU2006 license:** 9019
**Test sponsor:** Cisco Systems
**Tested by:** Cisco Systems

**Test date:** Jun-2016
**Hardware Availability:** Apr-2016
**Software Availability:** Dec-2015

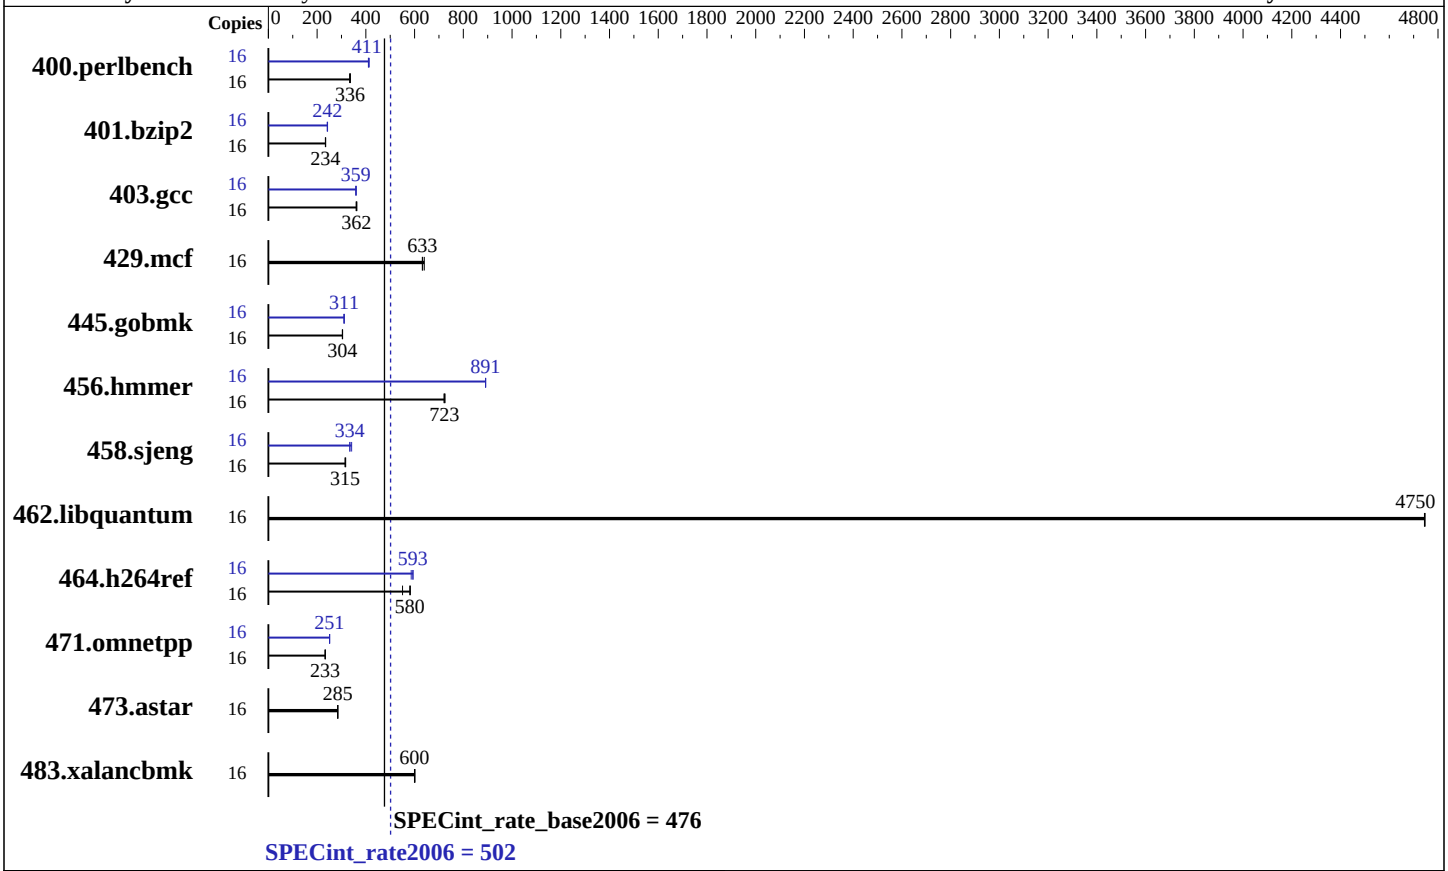


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-2637 v4 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.70 GHz |
| CPU MHz: | 3500 |
| FPU: | Integrated |
| CPU(s) enabled: | 8 cores, 2 chips, 4 cores/chip, 2 threads/core |
| CPU(s) orderable: | 1,2 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 15 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R) |
| Disk Subsystem: | 1 x 400 GB SSD SAS |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default |
| Compiler: | C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux |
| Auto Parallel: | No |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.2 |

# SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B200 M4 (Intel Xeon E5-2637 v4, 3.50 GHz)

SPECint_rate2006 = 502

SPECint_rate_base2006 = 476

**CPU2006 license:** 9019
**Test sponsor:** Cisco Systems
**Tested by:** Cisco Systems

**Test date:** Jun-2016
**Hardware Availability:** Apr-2016
**Software Availability:** Dec-2015

## Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 16 | 465 | 336 | **466** | **336** | 469 | 333 | 16 | 381 | 410 | **380** | **411** | 378 | 414 |
| 401.bzip2 | 16 | 656 | 235 | 660 | 234 | **659** | **234** | 16 | **638** | **242** | 636 | 243 | 638 | 242 |
| 403.gcc | 16 | 358 | 360 | **356** | **362** | 355 | 363 | 16 | 359 | 359 | 357 | 361 | **359** | **359** |
| 429.mcf | 16 | **230** | **633** | 228 | 640 | 231 | 632 | 16 | **230** | **633** | 228 | 640 | 231 | 632 |
| 445.gobmk | 16 | **552** | **304** | 553 | 304 | 551 | 305 | 16 | 539 | 311 | 541 | 310 | **540** | **311** |
| 456.hmmer | 16 | 206 | 725 | 207 | 721 | **207** | **723** | 16 | 168 | 891 | 167 | 892 | **167** | **891** |
| 458.sjeng | 16 | 610 | 317 | **614** | **315** | 614 | 315 | 16 | 567 | 342 | **579** | **334** | 579 | 334 |
| 462.libquantum | 16 | 69.8 | 4750 | 69.9 | 4740 | **69.9** | **4750** | 16 | 69.8 | 4750 | 69.9 | 4740 | **69.9** | **4750** |
| 464.h264ref | 16 | 643 | 551 | 607 | 583 | **610** | **580** | 16 | 604 | 586 | 596 | 594 | **597** | **593** |
| 471.omnetpp | 16 | 428 | 234 | **428** | **233** | 430 | 233 | 16 | 399 | 251 | **398** | **251** | 398 | 252 |
| 473.astar | 16 | 394 | 285 | **394** | **285** | 395 | 284 | 16 | 394 | 285 | **394** | **285** | 395 | 284 |
| 483.xalancbmk | 16 | 183 | 602 | 184 | 600 | **184** | **600** | 16 | 183 | 602 | 184 | 600 | **184** | **600** |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS Settings:
CPU performance set to Enterprise
Power Technology set to Energy Efficient
Energy Performance BIAS setting set to Balanced Performance
Memory RAS configuration set to Maximum Performance
Memory Power Saving Mode set to Disabled
QPI Snoop Mode set to Home Directory Snoop with OSB
 Sysinfo program /opt/CISCO_Benchmarks/cpu2006/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on linux-nsg9 Tue Jun 21 00:55:43 2016

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2637 v4 @ 3.50GHz
```

Continued on next page

## Platform Notes (Continued)

```
        2 "physical id"s (chips)
        16 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 4
        siblings  : 8
        physical 0: cores 0 1 2 3
        physical 1: cores 0 1 2 3
     cache size : 15360 KB

  From /proc/meminfo
     MemTotal:       264369660 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 12 SP1

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP1"
        VERSION_ID="12.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"

  uname -a:
     Linux linux-nsg9 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
     (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jun 21 00:52

  SPEC is set to: /opt/CISCO_Benchmarks/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda1      xfs   325G   14G  312G   5% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page

## Platform Notes (Continued)

```
    BIOS Cisco Systems, Inc. B200M4.3.1.2.4.041120161047 04/11/2016
    Memory:
     16x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz
     8x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

## General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/CISCO_Benchmarks/cpu2006/libs/32:/opt/CISCO_Benchmarks/cpu2006/libs/64:/opt/CISCO_Benchmarks/cpu2006/sh"

  Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
  memory using RedHat EL 7.1
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Base Portability Flags

```
    400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
      401.bzip2: -D_FILE_OFFSET_BITS=64
        403.gcc: -D_FILE_OFFSET_BITS=64
        429.mcf: -D_FILE_OFFSET_BITS=64
      445.gobmk: -D_FILE_OFFSET_BITS=64
      456.hmmer: -D_FILE_OFFSET_BITS=64
      458.sjeng: -D_FILE_OFFSET_BITS=64
    462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
      464.h264ref: -D_FILE_OFFSET_BITS=64
      471.omnetpp: -D_FILE_OFFSET_BITS=64
        473.astar: -D_FILE_OFFSET_BITS=64
    483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`

Continued on next page

## Peak Portability Flags (Continued)

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

## Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

## Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml`


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 6 16:58:03 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 September 2016.