SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9
(2.50 GHz, Intel Xeon E5-4655 v4)

SPECfp®2006 = 121

SPECfp_base2006 = 114

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Aug-2016
Hardware Availability: Jul-2016
Software Availability: Dec-2015

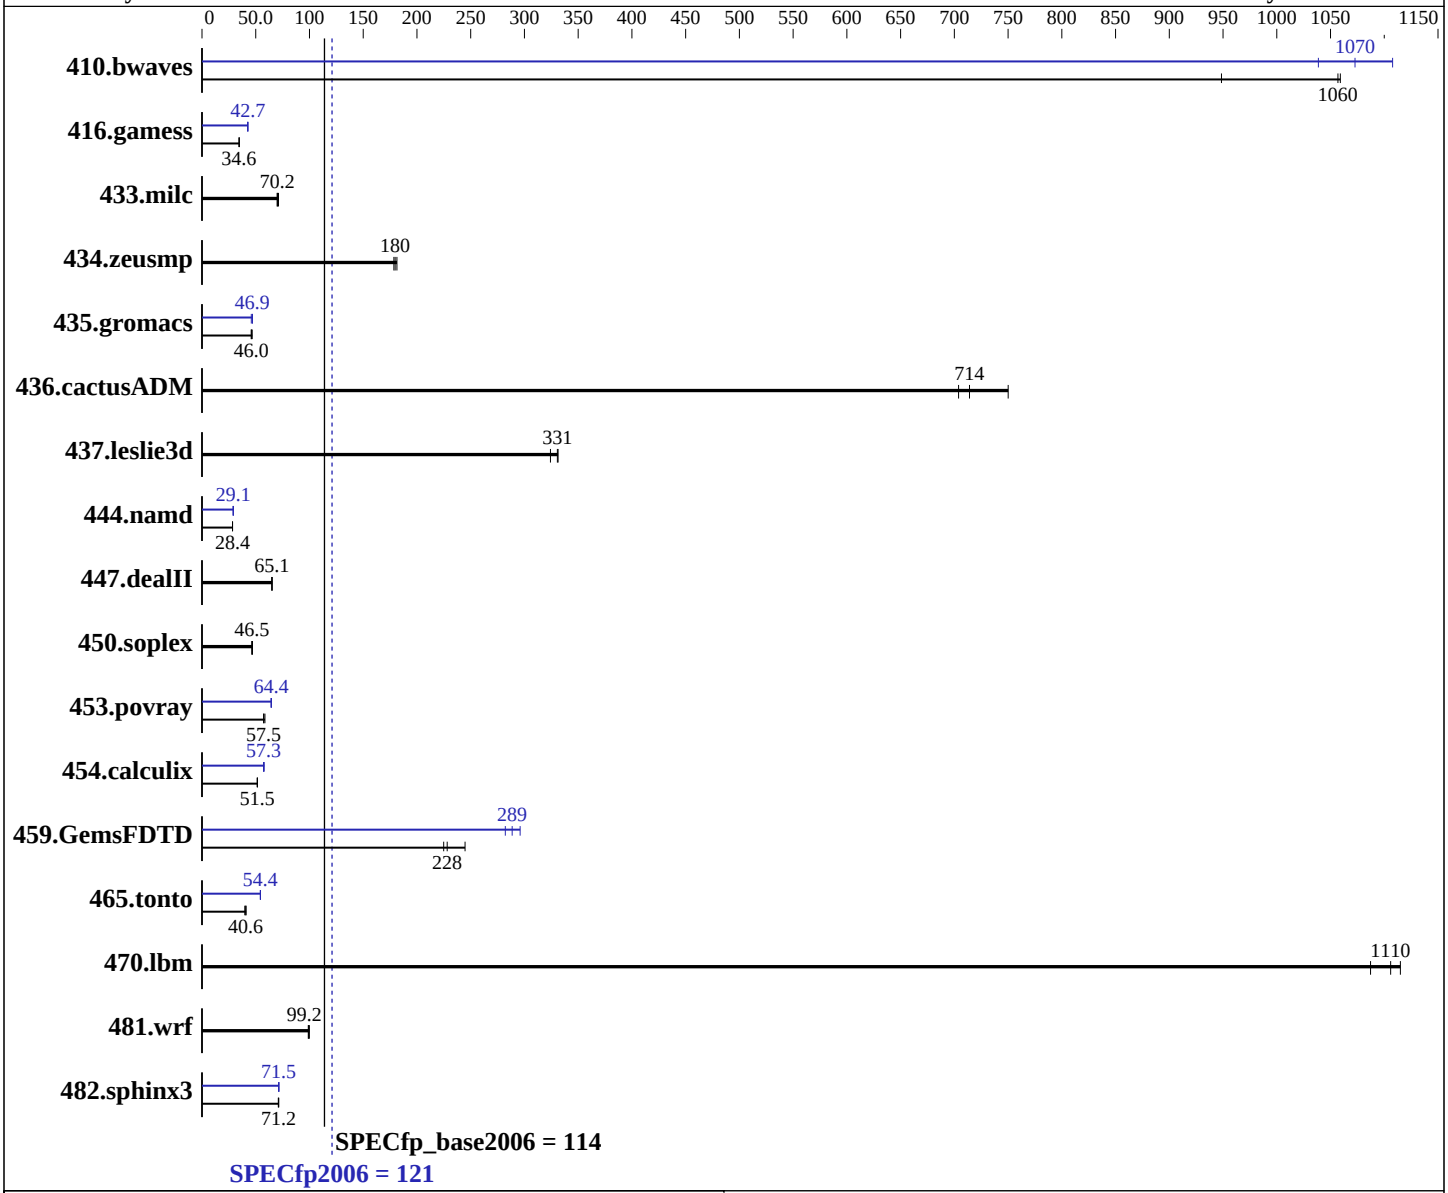

Hardware

CPU Name:	Intel Xeon E5-4655 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP1, Kernel 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux; Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL560 Gen9
(2.50 GHz, Intel Xeon E5-4655 v4)

SPECfp2006 = 121

SPECfp_base2006 = 114

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Aug-2016
Hardware Availability: Jul-2016
Software Availability: Dec-2015

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	14.3	949	**12.9**	**1060**	12.8	1060	13.1	1040	12.3	1110	**12.7**	**1070**
416.gamess	566	34.6	**566**	**34.6**	566	34.6	458	42.7	461	42.4	**459**	**42.7**
433.milc	**131**	**70.2**	129	71.2	131	69.9	**131**	**70.2**	129	71.2	131	69.9
434.zeusmp	51.0	179	**50.6**	**180**	50.2	181	51.0	179	**50.6**	**180**	50.2	181
435.gromacs	153	46.7	**155**	**46.0**	156	45.8	**152**	**46.9**	156	45.9	152	46.9
436.cactusADM	17.0	704	**16.7**	**714**	15.9	750	17.0	704	**16.7**	**714**	15.9	750
437.leslie3d	**28.4**	**331**	28.4	331	29.0	324	**28.4**	**331**	28.4	331	29.0	324
444.namd	283	28.4	282	28.4	**282**	**28.4**	276	29.1	**276**	**29.1**	276	29.0
447.dealII	176	65.0	**176**	**65.1**	175	65.3	176	65.0	**176**	**65.1**	175	65.3
450.soplex	178	47.0	180	46.5	**179**	**46.5**	178	47.0	180	46.5	**179**	**46.5**
453.povray	92.8	57.3	**92.5**	**57.5**	90.8	58.6	**82.6**	**64.4**	82.4	64.5	82.7	64.3
454.calculix	160	51.5	160	51.6	**160**	**51.5**	142	57.9	144	57.2	**144**	**57.3**
459.GemsFDTD	47.2	225	43.3	245	**46.5**	**228**	**36.8**	**289**	35.8	296	37.6	282
465.tonto	240	41.0	247	39.8	**242**	**40.6**	181	54.4	181	54.3	**181**	**54.4**
470.lbm	12.3	1120	12.6	1090	**12.4**	**1110**	12.3	1120	12.6	1090	**12.4**	**1110**
481.wrf	**113**	**99.2**	112	99.9	113	98.9	**113**	**99.2**	112	99.9	113	98.9
482.sphinx3	275	71.0	**274**	**71.2**	273	71.4	273	71.4	273	71.5	**273**	**71.5**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Platform Notes

```
BIOS Configuration:
  HP Power Profile set to Custom
  HP Power Regulator to HP Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C1E State
  Minimum Processor Idle Power Package C-State set to No Package State
  QPI Snoop Configuration set to Home Snoop
  Collaborative Power Control set to Disabled
  Thermal Configuration set to Maximum Cooling
```

Continued on next page

Platform Notes (Continued)

```
      Processor Power and Utilization Monitoring set to Disabled
      Memory Refresh Rate set to 1x Refresh
      Intel Hyper Threading set to Disabled

    Sysinfo program /home/custom/cpu2006/config/sysinfo.rev6914
    $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
    running on sles12biswadl560 Mon Aug 15 23:14:29 2016

    This section contains SUT (System Under Test) info as seen by
    some common utilities.  To remove or add to this section, see:
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E5-4655 v4 @ 2.50GHz
          4 "physical id"s (chips)
          32 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 8
          siblings  : 8
          physical 0: cores 0 1 3 5 8 10 12 13
          physical 1: cores 0 1 2 4 9 11 12 13
          physical 2: cores 0 1 3 5 8 10 12 13
          physical 3: cores 0 1 3 5 8 10 12 13
       cache size : 30720 KB

    From /proc/meminfo
       MemTotal:       529313052 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       SuSE-release:
          SUSE Linux Enterprise Server 12 (x86_64)
          VERSION = 12
          PATCHLEVEL = 1
          # This file is deprecated and will be removed in a future service pack or
          release.
          # Please check /etc/os-release for details about this release.
       os-release:
          NAME="SLES"
          VERSION="12-SP1"
          VERSION_ID="12.1"
          PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
          ID="sles"
          ANSI_COLOR="0;32"
          CPE_NAME="cpe:/o:suse:sles:12:sp1"

    uname -a:
       Linux sles12biswadl560 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
       (8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page

Platform Notes (Continued)

```
run-level 3 Aug 15 15:15

SPEC is set to: /home/custom/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   331G   52G  280G  16% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HP P85 07/01/2016
  Memory:
   16x UNKNOWN NOT AVAILABLE
   32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 512 GB and the dmidecode description should have one line reading as:
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
OMP_NUM_THREADS = "32"
LD_LIBRARY_PATH = "/home/custom/cpu2006/libs/32:/home/custom/cpu2006/libs/64:/home/custom/cpu2006/sh"

 Binaries compiled on a system with 1x Intel Xeon E5-2260 v4 CPU + 128GB
 memory using RedHat EL 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint -auto-ilp32

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
-qopt-calloc

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-qopt-prefetch-issue-excl-hint

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias -qopt-prefetch-issue-excl-hint -auto-ilp32

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Continued on next page

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -ansi-alias
-fp-model -nofor-main
-qopt-prefetch-issue-excl-hint -funroll-all-loops

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch
-fp-model
-qopt-prefetch-issue-excl-hint -funroll-all-loops

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

Continued on next page

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel
-opt-prefetch -ansi-alias
-fp-model -nofor-main
-qopt-prefetch-issue-excl-hint -funroll-all-loops
-auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Compiler-Flags-Intel-V1.2-HSW-revF.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 20 15:06:22 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 September 2016.