SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint®_rate2006 = 3410

SPECint_rate_base2006 = 3280

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Sep-2016
Hardware Availability: Jul-2016
Software Availability: Dec-2015

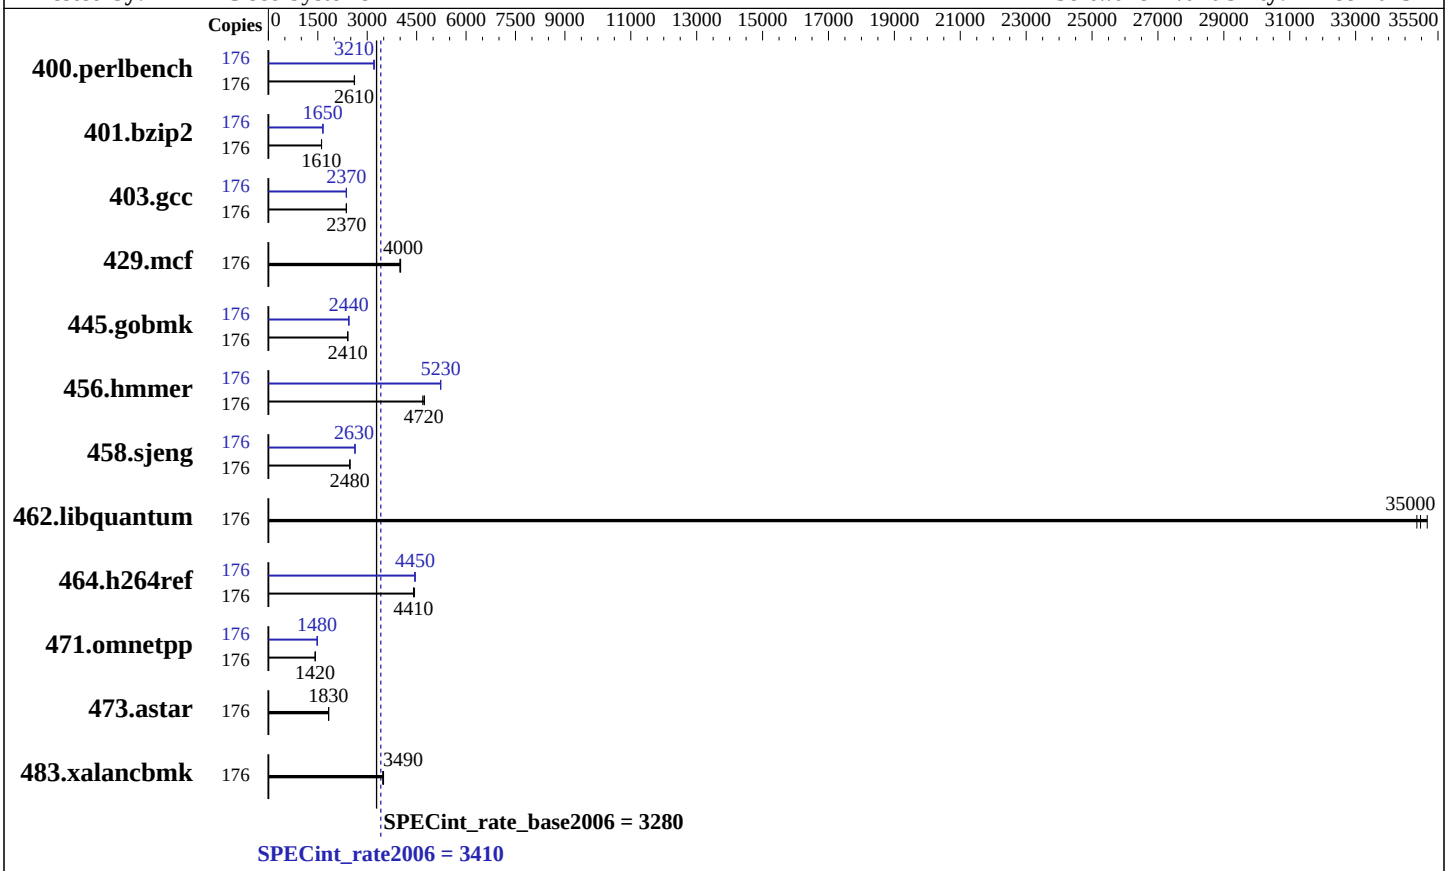

Hardware

CPU Name:	Intel Xeon E7-8880 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	88 cores, 4 chips, 22 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	55 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)
Disk Subsystem:	1 x 400 GB SAS SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default
Compiler:	C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C460 M4 (Intel Xeon E7-8880 v4 2.20 GHz)

SPECint_rate2006 = 3410

SPECint_rate_base2006 = 3280

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Sep-2016
Hardware Availability: Jul-2016
Software Availability: Dec-2015

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	176	657	2620	**658**	**2610**	660	2610	176	537	3200	**536**	**3210**	536	3210
401.bzip2	176	**1054**	**1610**	1051	1620	1054	1610	176	**1026**	**1650**	1025	1660	1027	1650
403.gcc	176	**598**	**2370**	598	2370	599	2360	176	598	2370	600	2360	**598**	**2370**
429.mcf	176	400	4010	**401**	**4000**	402	4000	176	400	4010	**401**	**4000**	402	4000
445.gobmk	176	765	2410	768	2400	**766**	**2410**	176	756	2440	**756**	**2440**	756	2440
456.hmmer	176	346	4740	351	4680	**348**	**4720**	176	**314**	**5230**	314	5230	314	5230
458.sjeng	176	860	2480	862	2470	**860**	**2480**	176	810	2630	811	2630	**810**	**2630**
462.libquantum	176	104	35200	105	34900	**104**	**35000**	176	104	35200	105	34900	**104**	**35000**
464.h264ref	176	878	4440	884	4400	**884**	**4410**	176	877	4440	874	4460	**875**	**4450**
471.omnetpp	176	775	1420	772	1430	**773**	**1420**	176	743	1480	**742**	**1480**	741	1480
473.astar	176	675	1830	**676**	**1830**	676	1830	176	675	1830	**676**	**1830**	676	1830
483.xalancbmk	176	**348**	**3490**	350	3470	347	3500	176	**348**	**3490**	350	3470	347	3500

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
CPU performance set to Enterprise
Power Technology set to Performance
Energy Performance BIAS setting set to Balanced Performance
Memory RAS configuration set to Maximum Performance
Memory Power Saving Mode set to Disabled
QPI Snoop Mode set to Cluster-on-Die
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6914
 $Rev: 6914 $ $Date:: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
 running on linux-69f9 Fri Sep 23 01:41:28 2016

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7-8880 v4 @ 2.20GHz
```

Continued on next page

Platform Notes (Continued)

```
        4 "physical id"s (chips)
        176 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 22
        siblings  : 44
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
        physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27
        28
     cache size : 28160 KB

  From /proc/meminfo
     MemTotal:       529286044 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 1
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP1"
        VERSION_ID="12.1"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp1"

  uname -a:
     Linux linux-69f9 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
     (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Sep 23 01:25

  SPEC is set to: /opt/cpu2006-1.2
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda1      xfs   372G   36G  337G  10% /
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
```

Continued on next page

Platform Notes (Continued)

```
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS Cisco Systems, Inc. C460M4.2.0.12b.0.062120160920 06/21/2016
   Memory:
    32x 0xCE00 M393A2G40EB1-CRC 16 GB 2 rank 2400 MHz, configured at 1600 MHz
    64x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"

 Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB
 memory using RedHat EL 7.1
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
    400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
      401.bzip2: -D_FILE_OFFSET_BITS=64
        403.gcc: -D_FILE_OFFSET_BITS=64
        429.mcf: -D_FILE_OFFSET_BITS=64
      445.gobmk: -D_FILE_OFFSET_BITS=64
      456.hmmer: -D_FILE_OFFSET_BITS=64
      458.sjeng: -D_FILE_OFFSET_BITS=64
  462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
    464.h264ref: -D_FILE_OFFSET_BITS=64
    471.omnetpp: -D_FILE_OFFSET_BITS=64
      473.astar: -D_FILE_OFFSET_BITS=64
  483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
458.sjeng: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revE.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Oct 19 10:29:31 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 October 2016.