



SPEC[®] CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp[®]_rate2006 = 727

Altos R380 F3 (Xeon E5-2667 v4)

SPECfp_rate_base2006 = 712

CPU2006 license: 97


Test date: Dec-2016

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Nov-2015

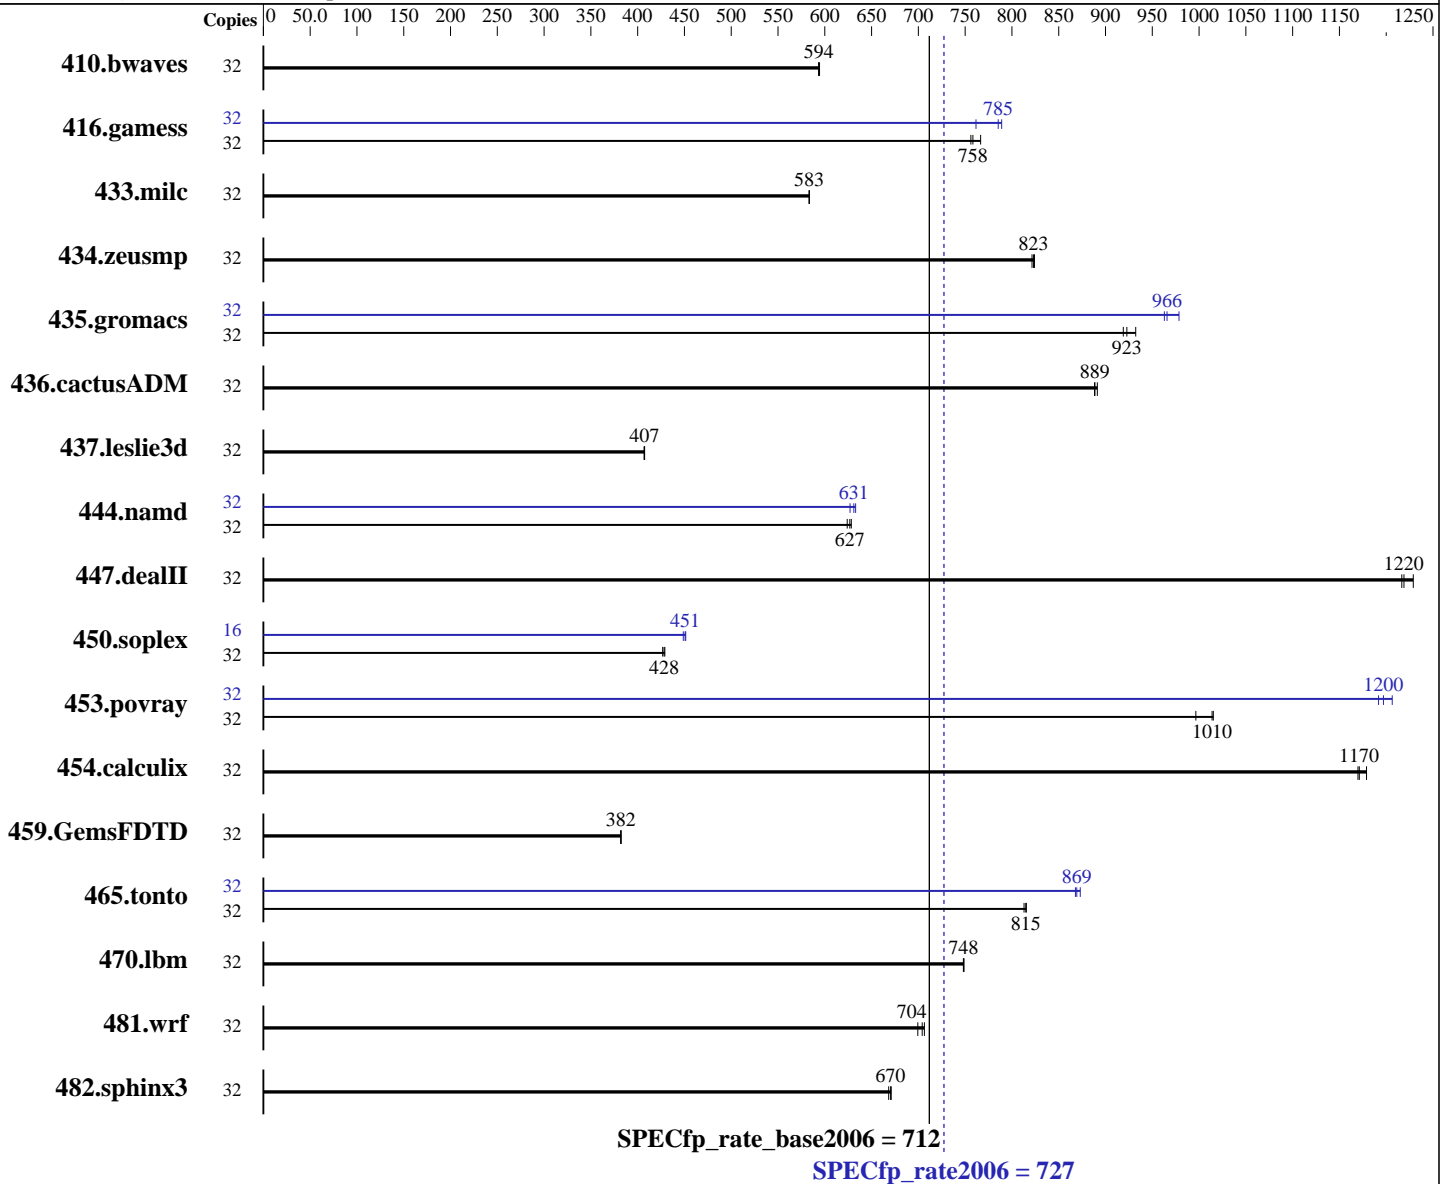

Hardware

CPU Name: Intel Xeon E5-2667 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3200
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;
 Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 727

Altos R380 F3 (Xeon E5-2667 v4)

SPECfp_rate_base2006 = 712

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

L3 Cache: 25 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (8 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem: 1 x 1000 GB SATA , 7200 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|------------|------------|------------|-------------|------------|-------------|--------|------------|------------|------------|-------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 32 | <u>733</u> | <u>594</u> | 733 | 593 | 732 | 594 | 32 | <u>733</u> | <u>594</u> | 733 | 593 | 732 | 594 |
| 416.gamess | 32 | 829 | 756 | <u>826</u> | <u>758</u> | 817 | 767 | 32 | 794 | 789 | <u>798</u> | <u>785</u> | 823 | 762 |
| 433.milc | 32 | 504 | 583 | <u>504</u> | <u>583</u> | 504 | 583 | 32 | 504 | 583 | <u>504</u> | <u>583</u> | 504 | 583 |
| 434.zeusmp | 32 | 353 | 824 | <u>354</u> | <u>823</u> | 354 | 821 | 32 | 353 | 824 | <u>354</u> | <u>823</u> | 354 | 821 |
| 435.gromacs | 32 | 249 | 919 | <u>248</u> | <u>923</u> | 245 | 932 | 32 | 233 | 979 | 237 | 963 | <u>237</u> | <u>966</u> |
| 436.cactusADM | 32 | <u>430</u> | <u>889</u> | 429 | 891 | 430 | 888 | 32 | <u>430</u> | <u>889</u> | 429 | 891 | 430 | 888 |
| 437.leslie3d | 32 | 738 | 407 | <u>739</u> | <u>407</u> | 739 | 407 | 32 | 738 | 407 | <u>739</u> | <u>407</u> | 739 | 407 |
| 444.namd | 32 | <u>409</u> | <u>627</u> | 411 | 624 | 408 | 628 | 32 | <u>407</u> | <u>631</u> | 405 | 633 | 409 | 627 |
| 447.dealII | 32 | 298 | 1230 | <u>300</u> | <u>1220</u> | 301 | 1220 | 32 | 298 | 1230 | <u>300</u> | <u>1220</u> | 301 | 1220 |
| 450.soplex | 32 | 622 | 429 | 625 | 427 | <u>623</u> | <u>428</u> | 16 | 296 | 451 | 297 | 449 | <u>296</u> | <u>451</u> |
| 453.povray | 32 | 171 | 997 | 168 | 1020 | <u>168</u> | <u>1010</u> | 32 | 141 | 1210 | 143 | 1190 | <u>142</u> | <u>1200</u> |
| 454.calculix | 32 | 226 | 1170 | 224 | 1180 | <u>225</u> | <u>1170</u> | 32 | 226 | 1170 | 224 | 1180 | <u>225</u> | <u>1170</u> |
| 459.GemsFDTD | 32 | 888 | 382 | 889 | 382 | <u>889</u> | <u>382</u> | 32 | 888 | 382 | 889 | 382 | <u>889</u> | <u>382</u> |
| 465.tonto | 32 | <u>386</u> | <u>815</u> | 386 | 815 | 387 | 813 | 32 | 363 | 868 | 361 | 873 | <u>362</u> | <u>869</u> |
| 470.lbm | 32 | 588 | 748 | <u>587</u> | <u>748</u> | 587 | 749 | 32 | 588 | 748 | <u>587</u> | <u>748</u> | 587 | 749 |
| 481.wrf | 32 | 511 | 699 | 506 | 706 | <u>508</u> | <u>704</u> | 32 | 511 | 699 | 506 | 706 | <u>508</u> | <u>704</u> |
| 482.sphinx3 | 32 | 933 | 668 | <u>930</u> | <u>670</u> | 930 | 671 | 32 | 933 | 668 | <u>930</u> | <u>670</u> | 930 | 671 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:
CPU Power and Performance Policy set to Performance
C1E Autopromote set to Disabled

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 727

Altos R380 F3 (Xeon E5-2667 v4)

SPECfp_rate_base2006 = 712

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Platform Notes (Continued)

Set Fan Profile set to Performance
Sysinfo program /usr/cpu2006/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on localhost.localdomain Tue Dec 6 20:32:28 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E5-2667 v4 @ 3.20GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores     : 8
  siblings      : 16
  physical 0:   cores 0 2 3 4 8 10 11 12
  physical 1:   cores 0 2 3 4 8 10 11 12
cache size     : 25600 KB
```

```
From /proc/meminfo
MemTotal:      131745224 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 5 20:43

```
SPEC is set to: /usr/cpu2006
Filesystem      Type Size Used Avail Use% Mounted on
/dev/mapper/rhel-root xfs 1000G 108G 893G 11% /
Additional information from dmidecode:
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 727

Altos R380 F3 (Xeon E5-2667 v4)

SPECfp_rate_base2006 = 712

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C610.86B.01.01.0015.012820160943 01/28/2016

Memory:

16x NO DIMM NO DIMM

8x Samsung M393A2G40DB1-CRC 16 GB 2 rank 2400 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Altos R360 F3 and Altos R380 F3 are electronically equivalent.

This result was measured on Altos R360 F3.

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 727

Altos R380 F3 (Xeon E5-2667 v4)

SPECfp_rate_base2006 = 712

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

```

Peak Compiler Invocation

C benchmarks:

```

icc -m64

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

450.soplex: icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

```

Fortran benchmarks:

```

ifort -m64

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 727

Altos R380 F3 (Xeon E5-2667 v4)

SPECfp_rate_base2006 = 712

CPU2006 license: 97

Test date: Dec-2016

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Nov-2015

Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -D_FILE_OFFSET_BITS=64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
 -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
 -par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
 -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 727

Altos R380 F3 (Xeon E5-2667 v4)

SPECfp_rate_base2006 = 712

CPU2006 license: 97

Test date: Dec-2016

Test sponsor: Acer Incorporated

Hardware Availability: Mar-2016

Tested by: Acer Incorporated

Software Availability: Nov-2015

Peak Optimization Flags (Continued)

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>
<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.3-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>
<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.3-revA.xml>



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp_rate2006 = 727

Altos R380 F3 (Xeon E5-2667 v4)

SPECfp_rate_base2006 = 712

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Dec-2016

Hardware Availability: Mar-2016

Software Availability: Nov-2015

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 28 10:51:53 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 December 2016.