SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECint®_rate2006 = 1310

SPECint_rate_base2006 = 1260

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Jan-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

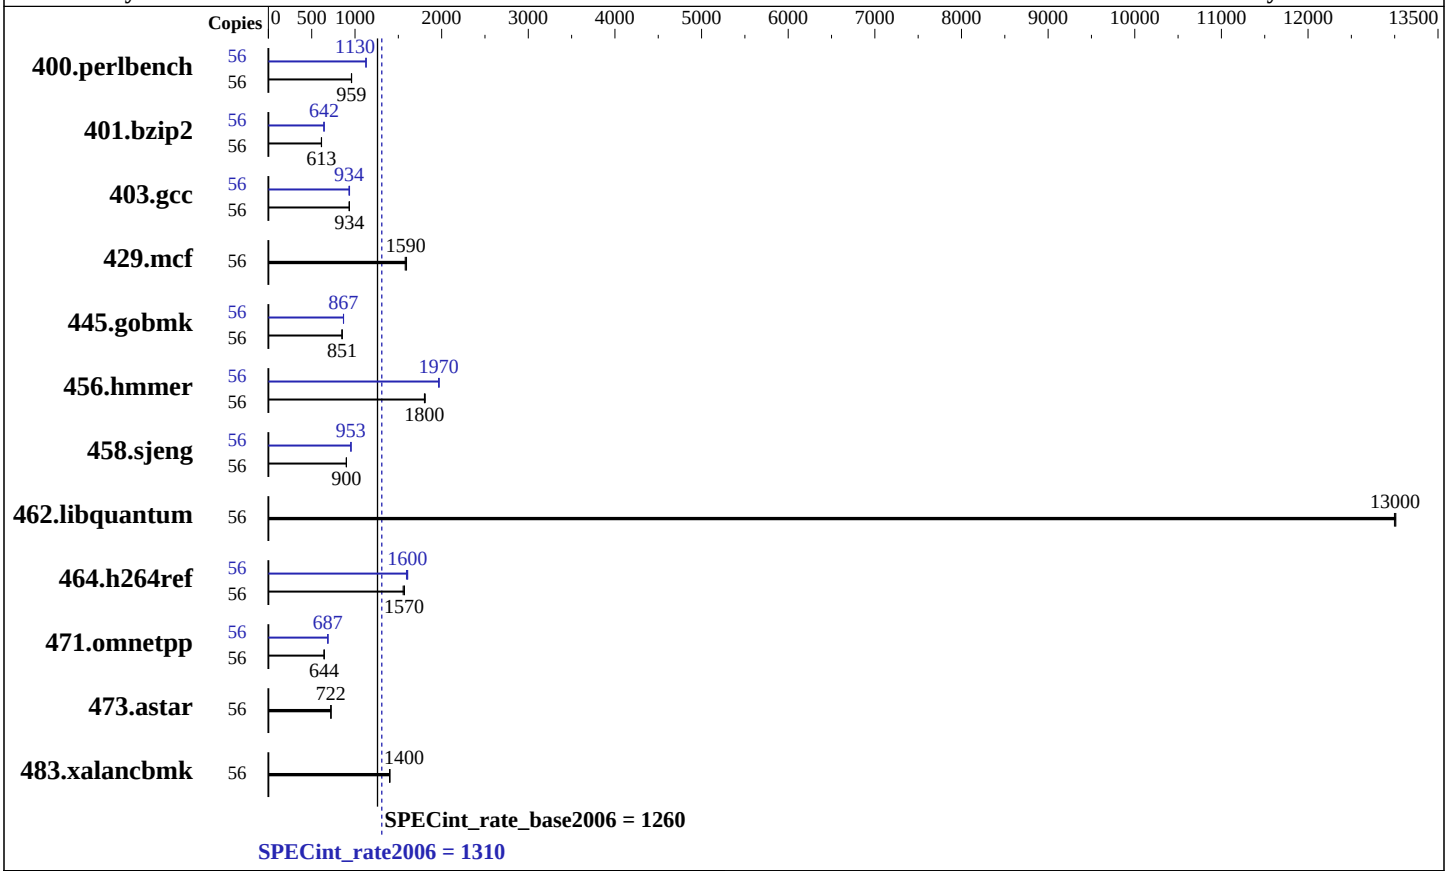

Hardware

CPU Name:	Intel Xeon E5-2680 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	35 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 240 GB SATA II SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.2 (Maipo) 3.10.0-327.18.2.el7.x86_64
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

ACTION S.A.

ACTINA SOLAR 210 X6 (Intel Xeon E5-2680 v4, 2.40 GHz)

SPECint_rate2006 = 1310

SPECint_rate_base2006 = 1260

CPU2006 license: 9008
Test sponsor: ACTION S.A.
Tested by: ACTION S.A.

Test date: Jan-2016
Hardware Availability: Mar-2016
Software Availability: Mar-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	**571**	**959**	569	961	571	959	56	486	1130	485	1130	**485**	**1130**
401.bzip2	56	**881**	**613**	880	614	884	611	56	839	644	**841**	**642**	844	641
403.gcc	56	481	936	484	932	**482**	**934**	56	484	931	481	937	**483**	**934**
429.mcf	56	320	1590	323	1580	**322**	**1590**	56	320	1590	323	1580	**322**	**1590**
445.gobmk	56	**691**	**851**	692	849	689	853	56	677	868	**677**	**867**	678	866
456.hmmer	56	289	1810	**290**	**1800**	290	1800	56	**265**	**1970**	265	1970	266	1970
458.sjeng	56	**753**	**900**	752	901	753	900	56	711	952	711	954	**711**	**953**
462.libquantum	56	89.3	13000	**89.2**	**13000**	89.2	13000	56	89.3	13000	**89.2**	**13000**	89.2	13000
464.h264ref	56	797	1560	**792**	**1570**	789	1570	56	771	1610	778	1590	**773**	**1600**
471.omnetpp	56	**544**	**644**	544	644	543	644	56	**510**	**687**	510	686	509	687
473.astar	56	543	724	545	721	**545**	**722**	56	543	724	545	721	**545**	**722**
483.xalancbmk	56	276	1400	275	1400	**276**	**1400**	56	276	1400	275	1400	**276**	**1400**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Bios Settings:
Intel(R) Hyper-Threading Tech = Enabled
Power & Performance = Performance
Enforce POR = Disabled
Memory Operating Speed Selection = 2400
Cluster-on-Die = Enabled
Set FAN Profile = Performance
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on SUT Tue Jan  5 15:57:17 2016

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo
```

Continued on next page

Platform Notes (Continued)

```
From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2680 v4 @ 2.40GHz
      2 "physical id"s (chips)
      56 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 14
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
   cache size : 17920 KB

From /proc/meminfo
   MemTotal:       263860272 kB
   HugePages_Total:       1
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.2 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.2"
      PRETTY_NAME="Red Hat Enterprise Linux"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
   os-release.rpmsave:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.0 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.0"
      PRETTY_NAME="Red Hat Enterprise Linux"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:
   Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 5 15:24

SPEC is set to: /cpu2006.1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda1      ext4  212G   45G  157G  23% /
Additional information from dmidecode:
```

Continued on next page

Platform Notes (Continued)

```
      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Intel Corporation SE5C610.86B.01.01.0019.101220160604 10/12/2016
    Memory:
     16x Hynix HMA42GR7AFR4N-UH 16 GB 2 rank 2400 MHz
     8x NO DIMM NO DIMM

  (End of data from sysinfo program)
  dmidecode does not properly detect memory modules
  16 modules of 16 GB were used to run the test (256 GB total)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh10.2"

  Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
  memory using Redhat Enterprise Linux 7.2
  Transparent Huge Pages enabled by default
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

```
    400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
        401.bzip2: -D_FILE_OFFSET_BITS=64
          403.gcc: -D_FILE_OFFSET_BITS=64
          429.mcf: -D_FILE_OFFSET_BITS=64
        445.gobmk: -D_FILE_OFFSET_BITS=64
        456.hmmer: -D_FILE_OFFSET_BITS=64
          458.sjeng: -D_FILE_OFFSET_BITS=64
    462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Continued on next page

Base Portability Flags (Continued)

464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3`

C++ benchmarks:
`-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto-ilp32 -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-ra-region-strategy=block` `-qopt-mem-layout-trans=3` `-Wl,-z,muldefs` `-L/sh10.2 -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Jan 25 10:54:01 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 January 2017.