



# SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.40 GHz, Intel Xeon E7-8894 v4)

**SPECfp®2006 = 127**

**127**

**SPECfp\_base2006 = 121**

**121**

CPU2006 license: 3


Test sponsor: HPE

Tested by: HPE

Test date: Jan-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

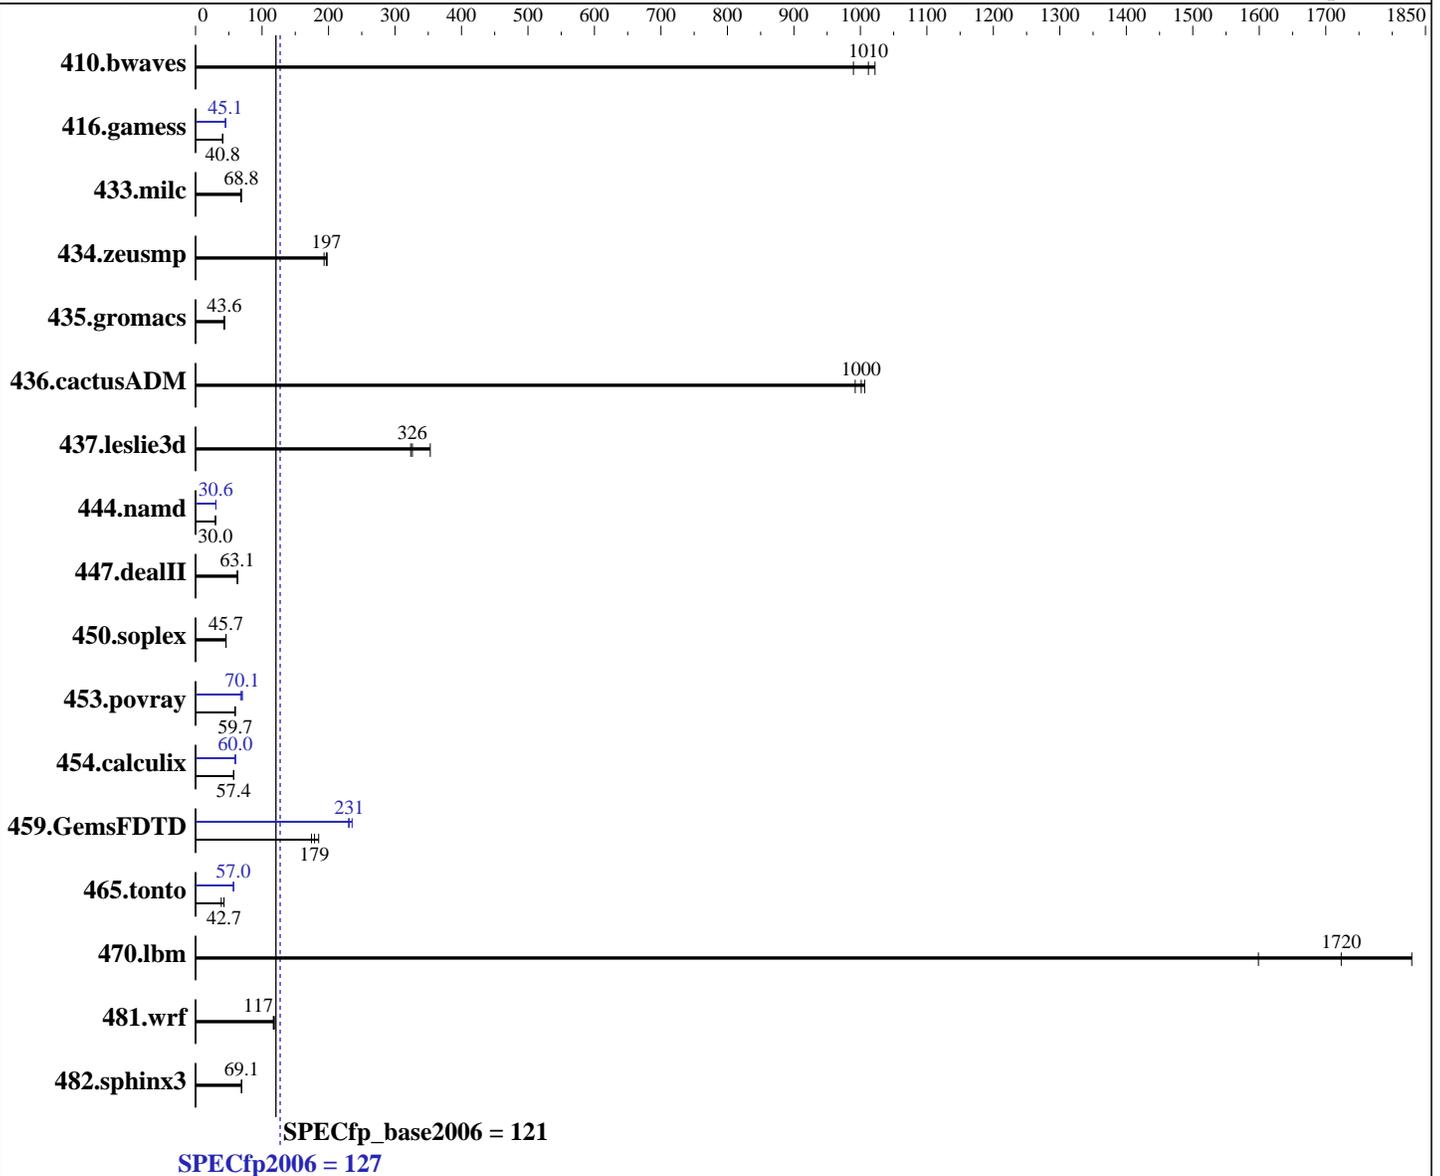

**Hardware**

CPU Name: Intel Xeon E7-8894 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

**Software**

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) SP1, Kernel 3.12.49-11-default  
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes  
 File System: xfs  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.40 GHz, Intel Xeon E7-8894 v4)

SPECfp2006 = 127

SPECfp\_base2006 = 121

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jan-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

L3 Cache: 60 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)  
Disk Subsystem: 1 x 800 GB NVMe PCIe SSD, RAID 0  
Other Hardware: DL580 Gen9 NVMe SSD Express Bay Enablement Kit

Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	13.3	1020	13.7	990	<b>13.4</b>	<b>1010</b>	13.3	1020	13.7	990	<b>13.4</b>	<b>1010</b>
416.gamess	480	40.8	<b>480</b>	<b>40.8</b>	480	40.8	<b>434</b>	<b>45.1</b>	435	45.0	434	45.1
433.milc	<b>133</b>	<b>68.8</b>	133	68.8	135	67.9	<b>133</b>	<b>68.8</b>	133	68.8	135	67.9
434.zeusmp	47.1	193	46.0	198	<b>46.3</b>	<b>197</b>	47.1	193	46.0	198	<b>46.3</b>	<b>197</b>
435.gromacs	164	43.6	167	42.7	<b>164</b>	<b>43.6</b>	164	43.6	167	42.7	<b>164</b>	<b>43.6</b>
436.cactusADM	<b>11.9</b>	<b>1000</b>	11.9	1010	12.0	992	<b>11.9</b>	<b>1000</b>	11.9	1010	12.0	992
437.leslie3d	26.6	353	<b>28.8</b>	<b>326</b>	29.0	324	26.6	353	<b>28.8</b>	<b>326</b>	29.0	324
444.namd	<b>268</b>	<b>30.0</b>	268	30.0	268	29.9	262	30.6	<b>262</b>	<b>30.6</b>	263	30.5
447.dealII	181	63.1	<b>181</b>	<b>63.1</b>	182	62.8	181	63.1	<b>181</b>	<b>63.1</b>	182	62.8
450.soplex	182	45.9	183	45.6	<b>182</b>	<b>45.7</b>	182	45.9	183	45.6	<b>182</b>	<b>45.7</b>
453.povray	89.0	59.8	<b>89.2</b>	<b>59.7</b>	89.9	59.2	75.8	70.1	<b>75.9</b>	<b>70.1</b>	78.5	67.8
454.calculix	144	57.4	144	57.3	<b>144</b>	<b>57.4</b>	<b>137</b>	<b>60.0</b>	137	60.1	139	59.3
459.GemsFDTD	57.3	185	60.9	174	<b>59.3</b>	<b>179</b>	<b>45.9</b>	<b>231</b>	45.0	236	46.1	230
465.tonto	255	38.6	<b>230</b>	<b>42.7</b>	230	42.7	<b>173</b>	<b>57.0</b>	173	57.0	172	57.1
470.lbm	8.59	1600	<b>7.97</b>	<b>1720</b>	7.51	1830	8.59	1600	<b>7.97</b>	<b>1720</b>	7.51	1830
481.wrf	<b>95.2</b>	<b>117</b>	95.4	117	94.2	119	<b>95.2</b>	<b>117</b>	95.4	117	94.2	119
482.sphinx3	281	69.4	<b>282</b>	<b>69.1</b>	282	69.1	281	69.4	<b>282</b>	<b>69.1</b>	282	69.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default.

## Platform Notes

BIOS Configuration:

HP Power Profile set to Custom  
HP Power Regulator to HP Static High Performance Mode  
Minimum Processor Idle Power Core C-State set to C6 State  
Minimum Processor Idle Power Package C-State set to No Package State  
QPI Snoop Configuration set to Home Snoop  
Collaborative Power Control set to Disabled  
Thermal Configuration set to Maximum Cooling

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant DL580 Gen9**  
(2.40 GHz, Intel Xeon E7-8894 v4)

**SPECfp2006 = 127**

**SPECfp\_base2006 = 121**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jan-2017

**Hardware Availability:** Mar-2017

**Software Availability:** Sep-2016

## Platform Notes (Continued)

Processor Power and Utilization Monitoring set to Disabled  
Intel Hyper Threading set to Disabled  
Memory Refresh Rate set to 1x Refresh

Sysinfo program /home/ic17\_latest/cpu2006\_copy/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on dl580\_manju Tue Jan 10 10:30:08 2017

This section contains SUT (System Under Test) info as seen by  
some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E7-8894 v4 @ 2.40GHz
 4 "physical id"s (chips)
 96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores     : 24
  siblings      : 24
  physical 0:   cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
  physical 1:   cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
  physical 2:   cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
  physical 3:   cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
 27 28 29
 cache size     : 61440 KB
```

From /proc/meminfo

```
MemTotal:      529314968 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/\*release\* /etc/\*version\*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 1
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP1"
VERSION_ID="12.1"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp1"
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen9  
(2.40 GHz, Intel Xeon E7-8894 v4)

**SPECfp2006 = 127**

**SPECfp\_base2006 = 121**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jan-2017

**Hardware Availability:** Mar-2017

**Software Availability:** Sep-2016

## Platform Notes (Continued)

```
uname -a:
Linux dl580_manju 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
(8d714a0) x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jan 10 10:25
```

```
SPEC is set to: /home/ic17_latest/cpu2006_copy
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/nvme0n1p4  xfs   703G  309G  394G  44% /home
```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP U17 12/08/2016

Memory:

64x UNKNOWN NOT AVAILABLE

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have one line reading as:  
32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2400 MHz, configured at 1600 MHz

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/ic17\_latest/cpu2006\_copy/libs/32:/home/ic17\_latest/cpu2006\_copy/libs/64:/home/ic17\_latest/cpu2006\_copy/sh10.2"

OMP\_NUM\_THREADS = "96"

Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.40 GHz, Intel Xeon E7-8894 v4)

SPECfp2006 =

127

SPECfp\_base2006 =

121

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jan-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -qopt-prefetch
-ansi-alias -fp-model fast=2
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -qopt-prefetch
-ansi-alias -fp-model fast=2
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -qopt-prefetch
-fp-model fast=2
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -qopt-prefetch
-ansi-alias -fp-model fast=2
```



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.40 GHz, Intel Xeon E7-8894 v4)

SPECfp2006 =

127

SPECfp\_base2006 =

121

CPU2006 license: 3

Test sponsor: HPE

Tested by: HPE

Test date: Jan-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)  
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)  
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)  
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

ProLiant DL580 Gen9

(2.40 GHz, Intel Xeon E7-8894 v4)

**SPECfp2006 =**

**127**

**SPECfp\_base2006 =**

**121**

**CPU2006 license:** 3

**Test sponsor:** HPE

**Tested by:** HPE

**Test date:** Jan-2017

**Hardware Availability:** Mar-2017

**Software Availability:** Sep-2016

## Peak Optimization Flags (Continued)

416.gamess (continued):

-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)  
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)  
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -inline-calloc  
-qopt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

<http://www.spec.org/cpu2006/flags/HPE-Compiler-Flags-Intel-V1.2-HSW-revH.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

<http://www.spec.org/cpu2006/flags/HPE-Compiler-Flags-Intel-V1.2-HSW-revH.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue May 2 15:21:56 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 May 2017.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>

Page 7