SPEC® CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 680 Gen9
(2.40 GHz, Intel Xeon E7-8894 v4)

SPECfp®2006 = 127

SPECfp_base2006 = 120

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Jan-2017
Hardware Availability: Mar-2017
Software Availability: Nov-2016

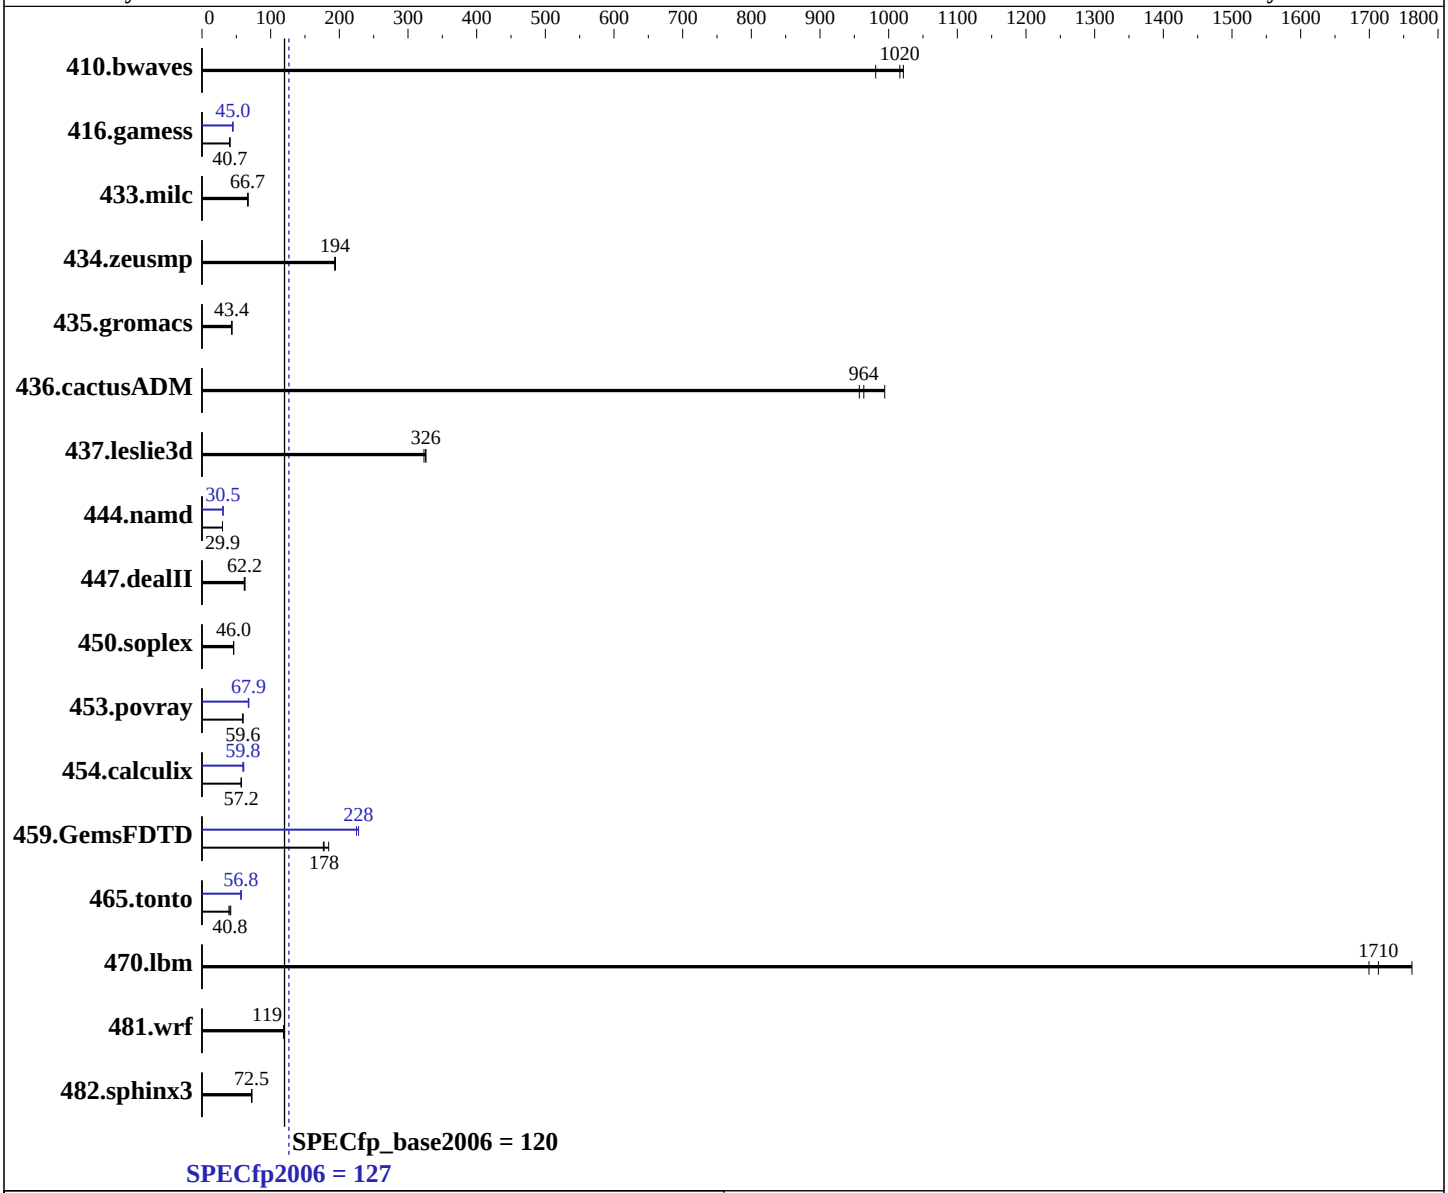

Hardware

CPU Name:	Intel Xeon E7-8894 v4
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	96 cores, 4 chips, 24 cores/chip
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2, Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.0.098 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

Synergy 680 Gen9
(2.40 GHz, Intel Xeon E7-8894 v4)

SPECfp2006 = 127

SPECfp_base2006 = 120

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Jan-2017
Hardware Availability: Mar-2017
Software Availability: Nov-2016

L3 Cache: 60 MB I+D on chip per chip
Other Cache: None
Memory: 1 TB (32 x 32 GB 2Rx4 PC4-2400T-R, running at 1600 MHz)
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0
Other Hardware: None

Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	**13.4**	**1020**	13.9	981	13.3	1020	**13.4**	**1020**	13.9	981	13.3	1020
416.gamess	481	40.7	**481**	**40.7**	486	40.3	436	45.0	**436**	**45.0**	436	44.9
433.milc	**138**	**66.7**	137	67.2	138	66.6	**138**	**66.7**	137	67.2	138	66.6
434.zeusmp	**47.0**	**194**	47.1	193	46.8	194	**47.0**	**194**	47.1	193	46.8	194
435.gromacs	164	43.5	**164**	**43.4**	165	43.4	164	43.5	**164**	**43.4**	165	43.4
436.cactusADM	**12.4**	**964**	12.5	957	12.0	994	**12.4**	**964**	12.5	957	12.0	994
437.leslie3d	**28.8**	**326**	29.1	323	28.8	326	**28.8**	**326**	29.1	323	28.8	326
444.namd	**269**	**29.9**	268	29.9	269	29.9	**263**	**30.5**	262	30.6	263	30.5
447.dealII	183	62.6	**184**	**62.2**	186	61.5	183	62.6	**184**	**62.2**	186	61.5
450.soplex	**181**	**46.0**	181	46.2	182	45.9	**181**	**46.0**	181	46.2	182	45.9
453.povray	**89.3**	**59.6**	89.2	59.7	89.7	59.3	78.9	67.4	78.1	68.1	**78.3**	**67.9**
454.calculix	144	57.3	144	57.2	**144**	**57.2**	136	60.8	**138**	**59.8**	138	59.8
459.GemsFDTD	**59.7**	**178**	60.0	177	57.5	184	47.2	225	46.5	228	**46.6**	**228**
465.tonto	**241**	**40.8**	251	39.3	235	41.8	**173**	**56.8**	173	57.0	173	56.7
470.lbm	7.80	1760	**8.02**	**1710**	8.08	1700	7.80	1760	**8.02**	**1710**	8.08	1700
481.wrf	93.1	120	**93.6**	**119**	94.1	119	93.1	120	**93.6**	**119**	94.1	119
482.sphinx3	270	72.3	**269**	**72.5**	269	72.5	270	72.3	**269**	**72.5**	269	72.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default.
```

Platform Notes

```
BIOS Configuration:
  HP Power Profile set to Custom
  HP Power Regulator to HP Static High Performance Mode
  Minimum Processor Idle Power Core C-State set to C6 State
  Minimum Processor Idle Power Package C-State set to No Package State
  QPI Snoop Configuration set to Home Snoop
  Collaborative Power Control set to Disabled
  Thermal Configuration set to Maximum Cooling
```

Continued on next page

Platform Notes (Continued)

```
      Processor Power and Utilization Monitoring set to Disabled
      Intel Hyper Threading set to Disabled
      Memory Refresh Rate set to 1x Refresh

    Sysinfo program /home/cpu2006/config/sysinfo.rev6993
    Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
    running on synergy680_manju Wed Jan 25 09:39:02 2017

    This section contains SUT (System Under Test) info as seen by
    some common utilities.  To remove or add to this section, see:
      http://www.spec.org/cpu2006/Docs/config.html#sysinfo

    From /proc/cpuinfo
       model name : Intel(R) Xeon(R) CPU E7-8894 v4 @ 2.40GHz
          4 "physical id"s (chips)
          96 "processors"
       cores, siblings (Caution: counting these is hw and system dependent.  The
       following excerpts from /proc/cpuinfo might not be reliable.  Use with
       caution.)
          cpu cores : 24
          siblings  : 24
          physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
          27 28 29
          physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
          27 28 29
          physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
          27 28 29
          physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26
          27 28 29
       cache size : 61440 KB

    From /proc/meminfo
       MemTotal:       1056744324 kB
       HugePages_Total:       0
       Hugepagesize:       2048 kB

    From /etc/*release* /etc/*version*
       SuSE-release:
          SUSE Linux Enterprise Server 12 (x86_64)
          VERSION = 12
          PATCHLEVEL = 2
          # This file is deprecated and will be removed in a future service pack or
          release.
          # Please check /etc/os-release for details about this release.
       os-release:
          NAME="SLES"
          VERSION="12-SP2"
          VERSION_ID="12.2"
          PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
          ID="sles"
          ANSI_COLOR="0;32"
          CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

Continued on next page

Platform Notes (Continued)

```
uname -a:
   Linux synergy680_manju 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
   (9464f67) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 24 11:14

SPEC is set to: /home/cpu2006
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda4      xfs   331G   22G  310G   7% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS HP I40 12/08/2016
  Memory:
   64x UNKNOWN NOT AVAILABLE
   32x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz, configured at 1600 MHz

(End of data from sysinfo program)
Regarding the sysinfo display about the memory installed, the correct amount of
memory is 1 TB and the dmidecode description should have one line reading as:
32x UNKNOWN NOT AVAILABLE 32 GB 2 rank 2400 MHz, configured at 1600 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh10.2"
OMP_NUM_THREADS = "96"

 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Fortran benchmarks:
```
ifort -m64
```

Continued on next page

Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -qopt-prefetch
-ansi-alias -fp-model fast=2

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -qopt-prefetch
-ansi-alias -fp-model fast=2

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -qopt-prefetch
-fp-model fast=2

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -static -parallel -qopt-prefetch
-ansi-alias -fp-model fast=2

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0

Continued on next page

Peak Optimization Flags (Continued)

416.gamess (continued):
-scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen=threadsafe(pass 1) -prof-use(pass 2)
-xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -inline-calloc
-qopt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html
http://www.spec.org/cpu2006/flags/HPE-Compiler-Flags-Intel-V1.2-HSW-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml
http://www.spec.org/cpu2006/flags/HPE-Compiler-Flags-Intel-V1.2-HSW-revH.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue May 2 15:21:55 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 May 2017.