# SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon CPU E5-4667 v4 2.20 GHz)

SPECint®2006 = 64.2

SPECint_base2006 = 62.2

**CPU2006 license:** 9019
**Test sponsor:** Cisco Systems
**Tested by:** Cisco Systems

**Test date:** Mar-2017
**Hardware Availability:** Apr-2016
**Software Availability:** Dec-2015

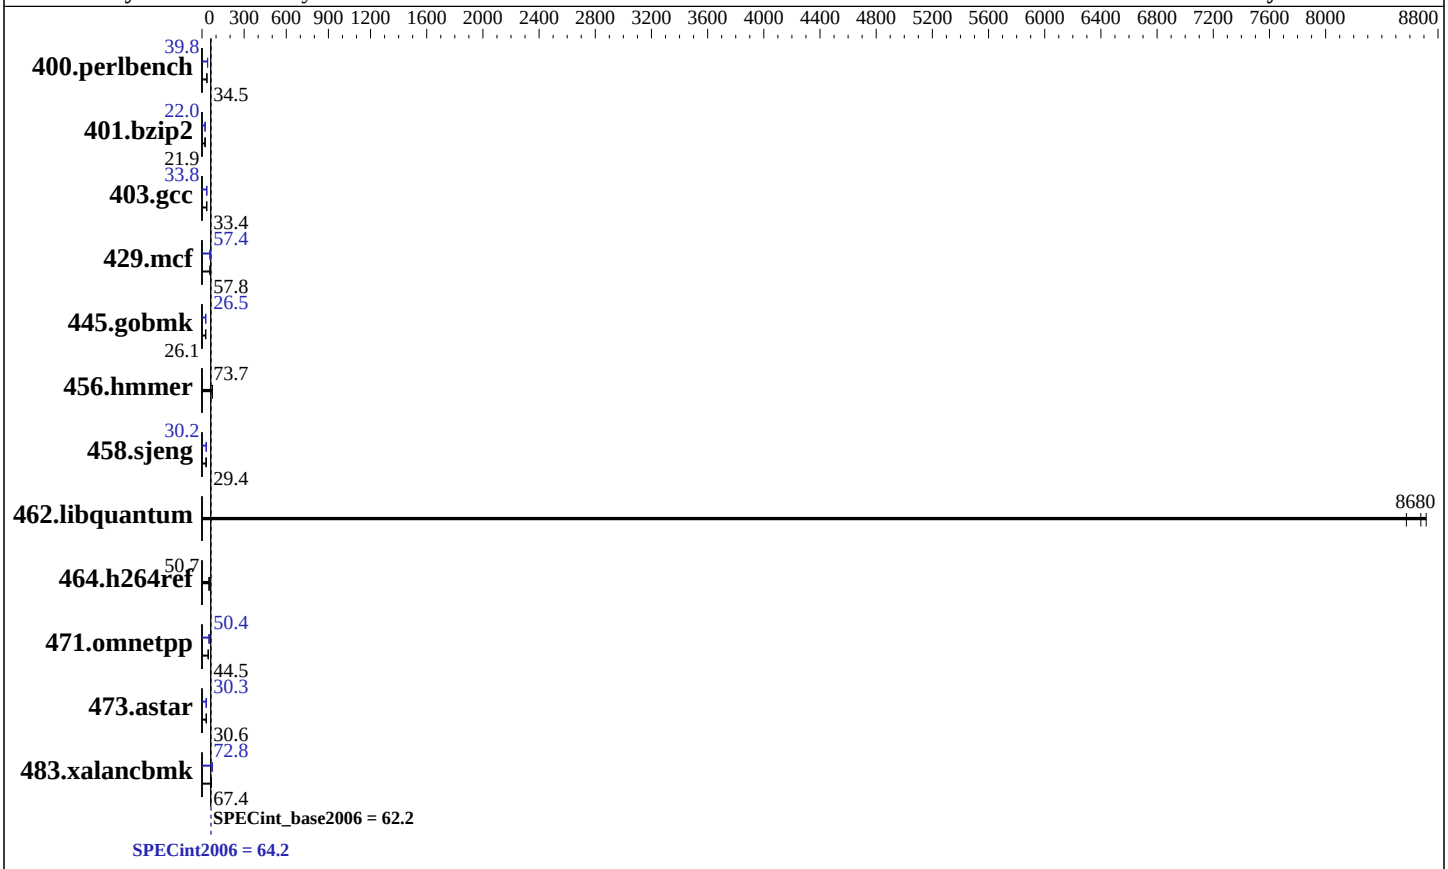


### Hardware

| | |
|---|---|
| CPU Name: | Intel Xeon E5-4667 v4 |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.00 GHz |
| CPU MHz: | 2200 |
| FPU: | Integrated |
| CPU(s) enabled: | 72 cores, 4 chips, 18 cores/chip |
| CPU(s) orderable: | 2,4 chips |
| Primary Cache: | 32 KB I + 32 KB D on chip per core |
| Secondary Cache: | 256 KB I+D on chip per core |
| L3 Cache: | 45 MB I+D on chip per chip |
| Other Cache: | None |
| Memory: | 1 TB (32 x 32 GB 2Rx4 PC4-2400T-R) |
| Disk Subsystem: | 1 x 300 GB SAS, 15K RPM |
| Other Hardware: | None |

### Software

| | |
|---|---|
| Operating System: | SUSE Linux Enterprise Server 12 SP1 (x86_64) 3.12.49-11-default |
| Compiler: | C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux |
| Auto Parallel: | Yes |
| File System: | xfs |
| System State: | Run level 3 (multi-user) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | Microquill SmartHeap V10.2 |

# SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS B420 M4 (Intel Xeon CPU E5-4667 v4 2.20 GHz)

SPECint2006 = 64.2

SPECint_base2006 = 62.2

**CPU2006 license:** 9019
**Test sponsor:** Cisco Systems
**Tested by:** Cisco Systems

**Test date:** Mar-2017
**Hardware Availability:** Apr-2016
**Software Availability:** Dec-2015

## Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | **283** | **34.5** | 284 | 34.5 | 282 | 34.6 | **245** | **39.8** | 246 | 39.8 | 245 | 39.8 |
| 401.bzip2 | 441 | 21.9 | 440 | 21.9 | **440** | **21.9** | 438 | 22.0 | **439** | **22.0** | 439 | 22.0 |
| 403.gcc | **241** | **33.4** | 240 | 33.5 | 241 | 33.4 | **238** | **33.8** | 240 | 33.6 | 237 | 34.0 |
| 429.mcf | **158** | **57.8** | 159 | 57.3 | 156 | 58.4 | **159** | **57.4** | 159 | 57.3 | 157 | 57.9 |
| 445.gobmk | **401** | **26.1** | 402 | 26.1 | 401 | 26.1 | 396 | 26.5 | **396** | **26.5** | 395 | 26.5 |
| 456.hmmer | 127 | 73.7 | 127 | 73.7 | **127** | **73.7** | 127 | 73.7 | 127 | 73.7 | **127** | **73.7** |
| 458.sjeng | 411 | 29.4 | 413 | 29.3 | **412** | **29.4** | **400** | **30.2** | 400 | 30.3 | 401 | 30.2 |
| 462.libquantum | **2.39** | **8680** | 2.42 | 8570 | 2.38 | 8720 | **2.39** | **8680** | 2.42 | 8570 | 2.38 | 8720 |
| 464.h264ref | 435 | 50.8 | 439 | 50.4 | **436** | **50.7** | 435 | 50.8 | 439 | 50.4 | **436** | **50.7** |
| 471.omnetpp | 140 | 44.7 | **141** | **44.5** | 141 | 44.2 | 124 | 50.3 | 124 | 50.6 | **124** | **50.4** |
| 473.astar | 231 | 30.4 | **230** | **30.6** | 229 | 30.7 | 231 | 30.3 | **232** | **30.3** | 235 | 29.9 |
| 483.xalancbmk | 102 | 67.6 | **102** | **67.4** | 103 | 67.2 | **94.8** | **72.8** | 94.8 | 72.8 | 95.5 | 72.2 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

```
The config file option 'submit' was used.
```

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

## Platform Notes

```
BIOS Settings:
Intel Hyper-Threading Technology option set to Disabled
CPU performance set to Enterprise
Power Technology set to Energy Efficient
Energy Performance BIAS setting set to Balanced Performance
Memory RAS configuration set to Maximum Performance
Memory Power Saving Mode set to Disabled
QPI Snoop Mode set to Home Directory Snoop with OSB
 Sysinfo program /home/cpu2006-1.2/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-84bk Tue Mar 14 02:48:06 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4667 v4 @ 2.20GHz
       4 "physical id"s (chips)
```

Continued on next page

## Platform Notes (Continued)

```
      72 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 18
      siblings  : 18
      physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
      physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
   cache size : 46080 KB

From /proc/meminfo
   MemTotal:       1058472616 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   SUSE Linux Enterprise Server 12 SP1

From /etc/*release* /etc/*version*
   SuSE-release:
      SUSE Linux Enterprise Server 12 (x86_64)
      VERSION = 12
      PATCHLEVEL = 1
      # This file is deprecated and will be removed in a future service pack or
      release.
      # Please check /etc/os-release for details about this release.
   os-release:
      NAME="SLES"
      VERSION="12-SP1"
      VERSION_ID="12.1"
      PRETTY_NAME="SUSE Linux Enterprise Server 12 SP1"
      ID="sles"
      ANSI_COLOR="0;32"
      CPE_NAME="cpe:/o:suse:sles:12:sp1"

uname -a:
   Linux linux-84bk 3.12.49-11-default #1 SMP Wed Nov 11 20:52:43 UTC 2015
   (8d714a0) x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 14 02:47

SPEC is set to: /home/cpu2006-1.2
   Filesystem     Type  Size  Used Avail Use% Mounted on
   /dev/sda7      xfs   236G   10G  226G   5% /home
Additional information from dmidecode:

   Warning: Use caution when you interpret this section. The 'dmidecode' program
   reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to
   hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page

## Platform Notes (Continued)

```
    BIOS Cisco Systems, Inc. B420M4.3.1.2g.0.011820171605 01/18/2017
    Memory:
     32x 0xCE00 M393A4K40BB1-CRC 32 GB 2 rank 2400 MHz
     16x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

## General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006-1.2/libs/32:/home/cpu2006-1.2/libs/64:/home/cpu2006-1.2/sh10.2"
OMP_NUM_THREADS = "72"

 Binaries compiled on a system with 1x Intel Core i7-4790K CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

# Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

# Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

## Base Optimization Flags

C benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32
```

C++ benchmarks:
```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

## Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc -m64
```

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

C++ benchmarks (except as noted below):
```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

473.astar: `icpc -m64`

## Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

# Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -auto-ilp32 -qopt-prefetch`

403.gcc: `-xCORE-AVX2 -ipo -O3 -no-prec-div -inline-calloc -qopt-malloc-options=3 -auto-ilp32`

429.mcf: `-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch -auto-p32`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2)

456.hmmer: `basepeak = yes`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `basepeak = yes`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX2`(pass 2) `-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-qopt-ra-region-strategy=block -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

473.astar: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64`

483.xalancbmk: `-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -Wl,-z,muldefs -L/sh10.2 -lsmartheap`

# Peak Other Flags

C benchmarks:

Continued on next page

# Peak Other Flags (Continued)

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.20170404.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revD.20170404.xml`


SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.


For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Apr 4 16:57:30 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 April 2017.