SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECint®_rate2006 = 5600

SPECint_rate_base2006 = 4900

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

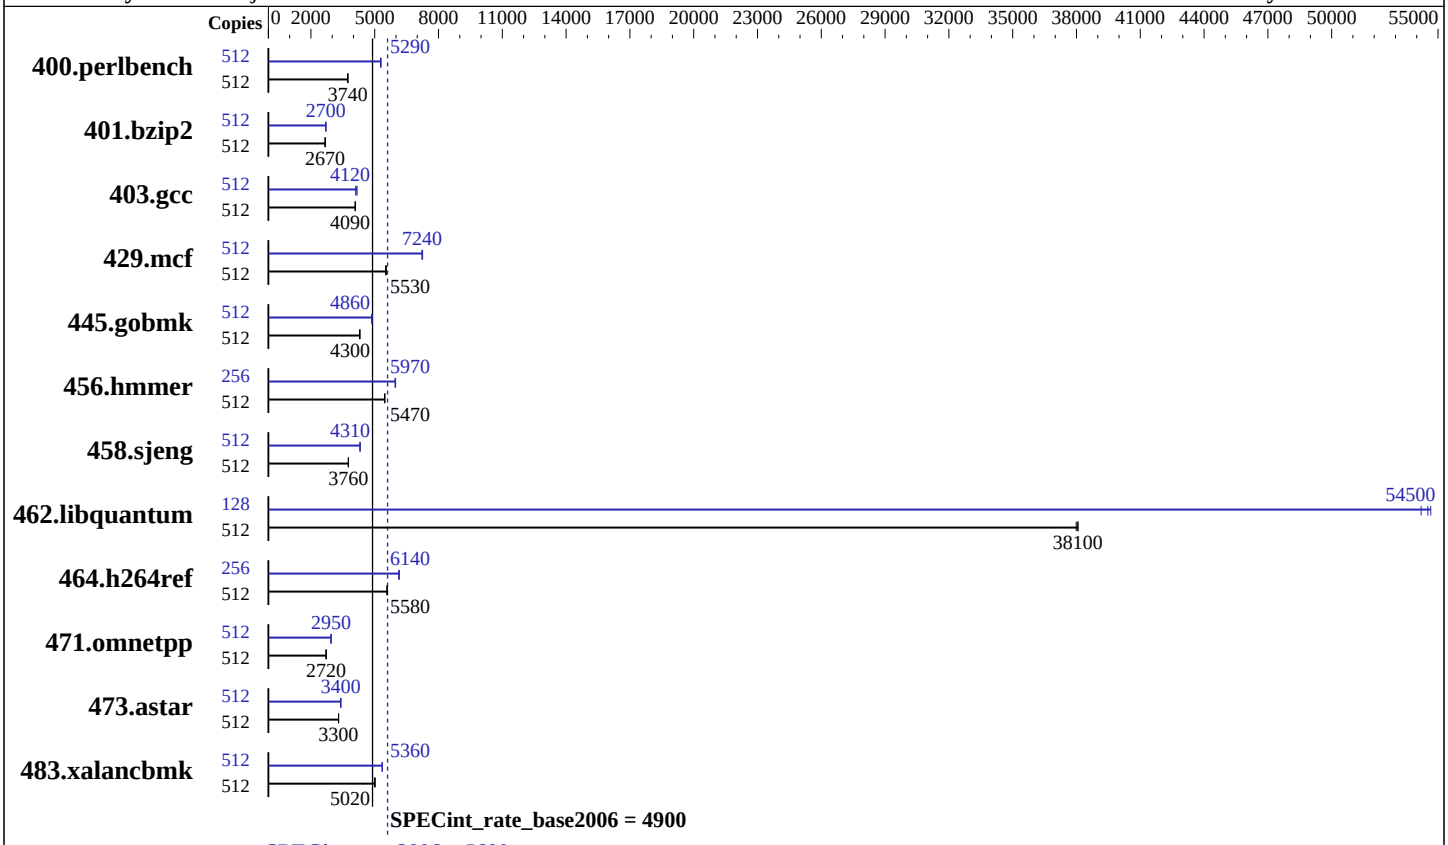

Hardware

CPU Name:	SPARC64 XII
CPU Characteristics:	High Speed Mode up to 4.35 GHz
CPU MHz:	4250
FPU:	Integrated
CPU(s) enabled:	64 cores, 8 chips, 8 cores/chip, 8 threads/core
CPU(s) orderable:	1 to 16 BBs; each BB contains 1 or 2 CPU chips; the number of orderable total cores is 2, 3, 4, .. 384
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	32 MB I+D on chip per chip
Other Cache:	None
Memory:	4 TB (128 x 32 GB 2Rx4 PC4-2400T-R)
Disk Subsystem:	1 x 600 GB 10K RPM SAS (for system disk)
Other Hardware:	None

Software

Operating System:	Oracle Solaris 11.3 (with June 2017 SRU)
Compiler:	C/C++: Version 12.6 of Oracle Developer Studio
Auto Parallel:	No
File System:	tmpfs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Fujitsu
Fujitsu SPARC M12-2S

SPECint_rate2006 = 5600

SPECint_rate_base2006 = 4900

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Mar-2017
Hardware Availability: Apr-2017
Software Availability: Jul-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	512	**1338**	**3740**	1343	3730	1337	3740	512	946	5290	**946**	**5290**	947	5280
401.bzip2	512	**1852**	**2670**	1841	2680	1855	2660	512	**1828**	**2700**	1826	2710	1828	2700
403.gcc	512	1010	4080	**1009**	**4090**	1008	4090	512	1003	4110	988	4170	**1000**	**4120**
429.mcf	512	847	5510	843	5540	**844**	**5530**	512	647	7220	644	7250	**645**	**7240**
445.gobmk	512	**1250**	**4300**	1251	4290	1247	4310	512	1106	4850	1099	4890	**1105**	**4860**
456.hmmer	512	872	5480	874	5470	**873**	**5470**	256	401	5960	399	5980	**400**	**5970**
458.sjeng	512	**1646**	**3760**	1645	3770	1650	3760	512	**1436**	**4310**	1436	4310	1438	4310
462.libquantum	512	279	38100	279	38000	**279**	**38100**	128	48.9	54200	**48.6**	**54500**	48.5	54700
464.h264ref	512	2031	5580	2029	5590	**2029**	**5580**	256	921	6150	**923**	**6140**	923	6130
471.omnetpp	512	**1178**	**2720**	1178	2720	1179	2710	512	**1086**	**2950**	1086	2950	1086	2950
473.astar	512	1089	3300	**1089**	**3300**	1089	3300	512	**1056**	**3400**	1055	3410	1056	3400
483.xalancbmk	512	708	4990	704	5020	**704**	**5020**	512	**660**	**5360**	660	5350	659	5360

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
Processes were assigned to specific processors using 'pbind' commands.
The config file option 'submit' was used, along with a list of
processors in the 'BIND' variable, to generate the pbind commands.
(For details, please see the config file.)
```

Operating System Notes

```
Shell Environments:
   ulimit -s 131072 was used to limit the space consumed by the stack
   (and therefore make more space available to the heap).

   The "Logical Domains Manager" service was turned off using the command "svcadm disable ldmd".

System Tunables:
(/etc/system parameters)
   autoup = 86400
      Causes pages older than the listed number of seconds to be written by fsflush.
   doiflush = 0
     Controls whether file system metadata syncs will be executed during fsflush invocations.
   dopageflush = 0
      Controls whether memory is examined for modified pages during fsflush invocations.
   zfs:zfs_arc_max=1073741824
      Determines the maximum size of the ZFS Adaptive Replacement Cache (ARC).
```

Platform Notes

```
Firmware Settings:
(XSCF operations)
   Set High Speed Mode via XSCF command "sethsmode -s on".

 Sysinfo program /export/cpu2006/config/sysinfo
 Revision 6993 of 2015-11-06 (c9426fd40261140bb4c02f7d35768596)
 running on H2S-257-D0 Fri Mar 10 17:23:08 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /usr/sbin/psrinfo
    SPARC64-XII (chipid 0, clock 4250 MHz)
    SPARC64-XII (chipid 1, clock 4250 MHz)
    SPARC64-XII (chipid 2, clock 4250 MHz)
    SPARC64-XII (chipid 3, clock 4250 MHz)
    SPARC64-XII (chipid 4, clock 4250 MHz)
    SPARC64-XII (chipid 5, clock 4250 MHz)
    SPARC64-XII (chipid 6, clock 4250 MHz)
    SPARC64-XII (chipid 7, clock 4250 MHz)
    8 chips
    512 threads
    4250 MHz

 From kstat:       64 cores

 From prtconf: 4187136 Megabytes

 /etc/release:
      Oracle Solaris 11.3 SPARC
 uname -a:
    SunOS H2S-257-D0 5.11 11.3 sun4v sparc sun4v

 SPEC is set to: /export/cpu2006

 disk: df -h  /export/cpu2006
 Filesystem             Size   Used  Available Capacity  Mounted on
 rpool/export           547G    26G       243G    10%    /export

 (End of data from sysinfo program)
```

General Notes

```
 The Building Block (BB) is just a Fujitsu SPARC M12-2S that is the basic
 unit to be expanded as if stacking up children's blocks.

 File System:
  tmpfs: output_root was used to put run directories in /tmp/cpu2006
  zfs: operating system
```

Continued on next page

General Notes (Continued)

```
SPEC CPU2006 benchmark:
 Updated with runspec --update
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-std=c99 -m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=std

C++ benchmarks:
-m32 -fast -xtarget=sparc64xii -xipo=2 -xpagesize=4M
-xsegment_align=4M -xthroughput -xalias_level=compatible
-library=stlport4 -lfast

Base Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

Peak Compiler Invocation

C benchmarks:
cc

Continued on next page

Peak Compiler Invocation (Continued)

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xtarget=sparc64xplus -xipo=1
-xalias_level=std -xrestrict -xprefetch=no%auto -xO4
-Wc,-Qiselect-funcalign=4 -xthroughput=no -lfast

401.bzip2: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xalias_level=strong -xprefetch=no%auto
-Wc,-Qiselect-funcalign=4 -Wc,-Qicache-chbab=1
-xinline_param=max_inst_hard:1000,max_inst_soft:500,max_growth:60
-lfast

403.gcc: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xO4 -xipo=2 -xprefetch=no%auto
-Wc,-Qiselect-funcalign=64
-xcache=32/128/4/4:256/128/8/4:8192/128/16/24
-xalias_level=layout

429.mcf: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xipo=2 -xalias_level=std -xprefetch=latx:0.2
-W2,-Asac -Wc,-Qiselect-funcalign=64

445.gobmk: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xO4 -xalias_level=std -xrestrict

Continued on next page

Peak Optimization Flags (Continued)

445.gobmk (continued):
-xprefetch=no%auto -Wc,-Qiselect-funcalign=64
-Wc,-Qgsched-T=4

456.hmmer: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xipo=1 -xunroll=8 -Wc,-Qms_pipe-pref
-Wc,-Qiselect-funcalign=4
-xcache=32/128/4/4:256/128/8/4:8192/128/16/48

458.sjeng: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xO4 -xipo=2 -xalias_level=std -xunroll=4
-Wc,-Qiselect-funcalign=4 -W2,-Afully_unroll:always=on
-xprefetch=latx:0.6 -xcheck=%none

462.libquantum: -std=c99 -m32 -fast -xtarget=sparc64xii -xpagesize=256M
-xsegment_align=256M -xthroughput -m64
-xtarget=sparc64xplus -xipo=2
-xcache=32/128/4/4:256/128/8/4:8192/128/16/24
-xinline_param=level:1 -Wc,-Qiselect-funcalign=4
-xalias_level=layout -xprefetch=latx:0.2

464.h264ref: -std=c99 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xtarget=sparc64xplus -xipo=1
-Wc,-Qiselect-funcalign=4 -xthroughput=no
-xalias_level=layout -xprefetch=latx:0.2 -xcheck=%none

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xipo=1 -xalias_level=compatible -xunroll=2
-xprefetch_level=3 -W2,-Asac -xthroughput=no -lfast

473.astar: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M
-xthroughput -xtarget=sparc64xplus -xalias_level=compatible
-xipo=2 -xunroll=6 -xrestrict=%source
-Wc,-Qiselect-funcalign=64 -Wc,-Qgsched-T=4
-xprefetch=latx:0.3 -lfast

483.xalancbmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -m32 -fast
-xtarget=sparc64xii -xpagesize=256M -xsegment_align=256M

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk (continued):
-xthroughput -xipo=2 -xalias_level=compatible -xdepend
-xprefetch_level=3 -xprefetch=latx:0.4 -library=stlport4
-W2,-Asac -Wc,-Qiselect-funcalign=64 -features=no%except
-lfast

Peak Other Flags

C benchmarks:
-xjobs=8

C++ benchmarks:
-xjobs=8

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Oracle-Developer-Studio12.6.html
http://www.spec.org/cpu2006/flags/Fujitsu-M12-2S.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Oracle-Developer-Studio12.6.xml
http://www.spec.org/cpu2006/flags/Fujitsu-M12-2S.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Apr 20 09:42:30 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 April 2017.