SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR550
(2.00 GHz, Intel Xeon Silver 4109T)

SPECint®_rate2006 = 703

SPECint_rate_base2006 = 668

CPU2006 license: 9017
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2017
Hardware Availability: Aug-2017
Software Availability: Nov-2016

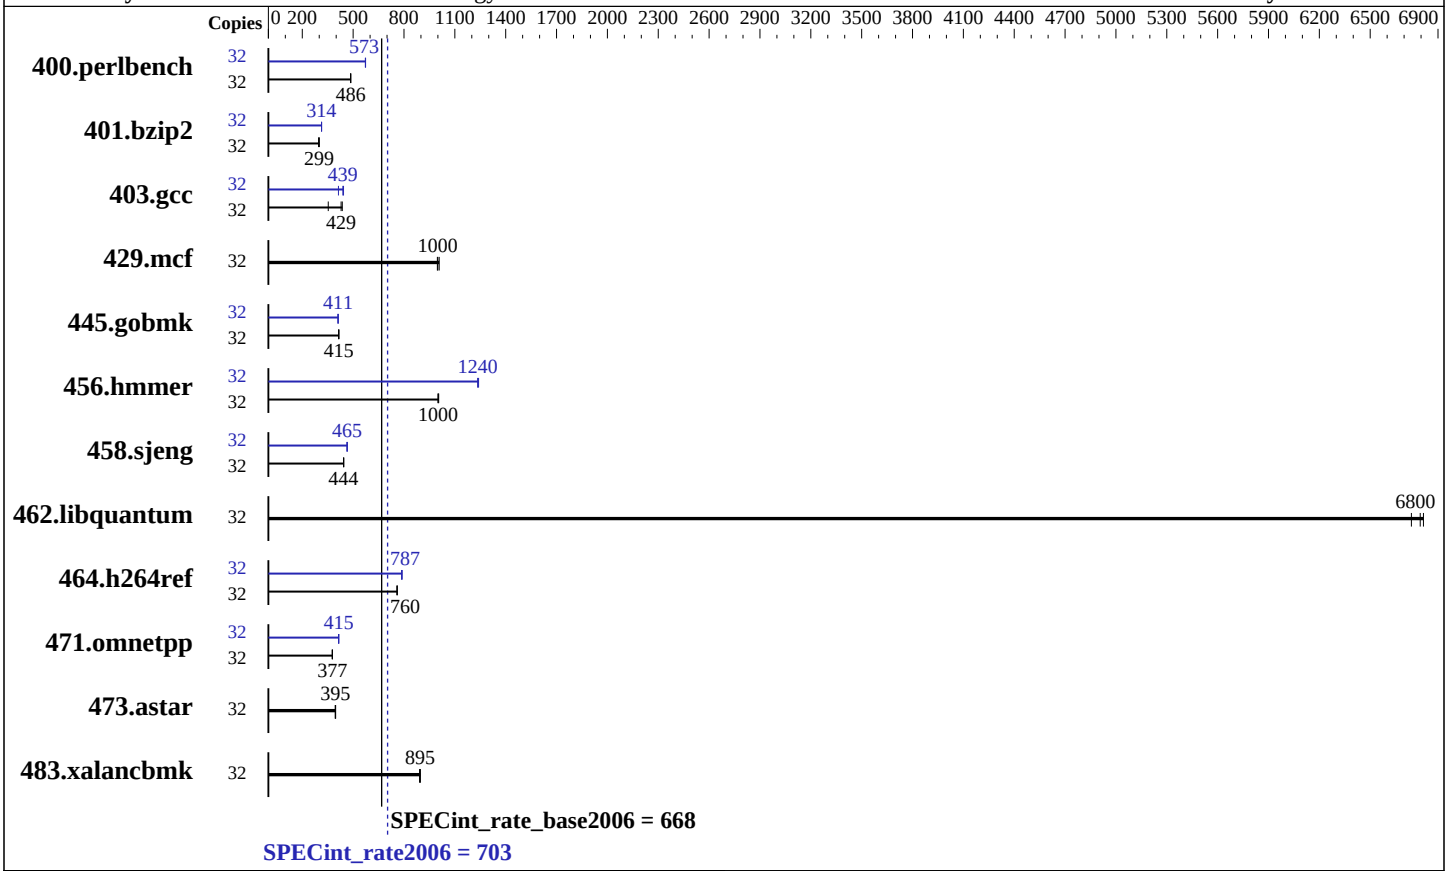

Hardware

CPU Name:	Intel Xeon Silver 4109T
CPU Characteristics:	Intel Turbo Boost Technology up to 3.00 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	11 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (12 x 32 GB 2Rx4 PC4-2666V-R, running at 2400 MHz)
Disk Subsystem:	1 x 800 GB SATA SSD
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 SP2 (x86_64) Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
Auto Parallel:	No
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR550
(2.00 GHz, Intel Xeon Silver 4109T)

SPECint_rate2006 = 703

SPECint_rate_base2006 = 668

CPU2006 license: 9017
Test sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test date: Jul-2017
Hardware Availability: Aug-2017
Software Availability: Nov-2016

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	645	485	**644**	**486**	643	486	32	546	572	545	573	**546**	**573**
401.bzip2	32	1029	300	1043	296	**1032**	**299**	32	985	313	983	314	**985**	**314**
403.gcc	32	729	353	591	436	**600**	**429**	32	**586**	**439**	581	443	623	413
429.mcf	32	**292**	**1000**	290	1010	293	997	32	**292**	**1000**	290	1010	293	997
445.gobmk	32	**808**	**415**	809	415	808	415	32	816	411	**816**	**411**	816	411
456.hmmer	32	297	1000	**298**	**1000**	298	1000	32	241	1240	**242**	**1240**	242	1240
458.sjeng	32	872	444	**872**	**444**	872	444	32	835	464	**833**	**465**	833	465
462.libquantum	32	**97.6**	**6800**	98.3	6740	97.3	6810	32	**97.6**	**6800**	98.3	6740	97.3	6810
464.h264ref	32	932	760	**932**	**760**	933	759	32	**900**	**787**	898	789	901	786
471.omnetpp	32	530	377	530	377	**530**	**377**	32	483	414	481	415	**482**	**415**
473.astar	32	569	395	566	397	**569**	**395**	32	569	395	566	397	**569**	**395**
483.xalancbmk	32	248	892	**247**	**895**	246	896	32	248	892	**247**	**895**	246	896

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Operating Mode set to Maximum Performance
DCU Streamer Prefetcher set to Disable
Adjacent Cache Prefetch set to Disable
UPI Prefetcher set to Disable
Stale AtoS set to Enable
LLC dead line alloc set to Disable
 Sysinfo program /home/cpu2006-1.2-ic17.0/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-g50d Tue Jul 25 23:32:47 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) Silver 4109T CPU @ 2.00GHz
```

Continued on next page

Platform Notes (Continued)

```
        2 "physical id"s (chips)
        32 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 8
        siblings  : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
     cache size : 11264 KB

  From /proc/meminfo
     MemTotal:       395883104 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
        VERSION = 12
        PATCHLEVEL = 2
        # This file is deprecated and will be removed in a future service pack or
        release.
        # Please check /etc/os-release for details about this release.
     os-release:
        NAME="SLES"
        VERSION="12-SP2"
        VERSION_ID="12.2"
        PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
        ID="sles"
        ANSI_COLOR="0;32"
        CPE_NAME="cpe:/o:suse:sles:12:sp2"

  uname -a:
     Linux linux-g50d 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
     (9464f67) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jul 25 23:30

  SPEC is set to: /home/cpu2006-1.2-ic17.0
     Filesystem     Type   Size  Used Avail Use% Mounted on
     /dev/sda2      btrfs  744G   92G  652G  13% /home
  Additional information from dmidecode:

     Warning: Use caution when you interpret this section. The 'dmidecode' program
     reads system data which is "intended to allow hardware to be accurately
     determined", but the intent may not be met, as there are frequent changes to
     hardware, firmware, and the "DMTF SMBIOS" standard.

    BIOS Lenovo -[TEE105Z-1.00]- 04/27/2017
    Memory:
     12x Hynix HMA84GR7AFR4N-VK 32 GB 2 rank 2666 MHz, configured at 2400 MHz
```

Continued on next page

Platform Notes (Continued)

```
(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006-1.2-ic17.0/libs/32:/home/cpu2006-1.2-ic17.0/libs/64:/home/cpu2006-1.2-ic17.0/sh10.2"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

Base Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-D_FILE_OFFSET_BITS=64`
403.gcc: `-D_FILE_OFFSET_BITS=64`
429.mcf: `-D_FILE_OFFSET_BITS=64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-D_FILE_OFFSET_BITS=64`
458.sjeng: `-D_FILE_OFFSET_BITS=64`
462.libquantum: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`
464.h264ref: `-D_FILE_OFFSET_BITS=64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-D_FILE_OFFSET_BITS=64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32 -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll4 -auto-ilp32 -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2) -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -qopt-ra-region-strategy=block -qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-SKL-C.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Sep 20 11:05:37 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 September 2017.