SPEC® CINT2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL385 Gen10
(2.20 GHz, AMD EPYC 7601)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 2210

CPU2006 license: 3		**Test date:**	Oct-2017
Test sponsor:	HPE	**Hardware Availability:**	Nov-2017
Tested by:	HPE	**Software Availability:**	Sep-2017

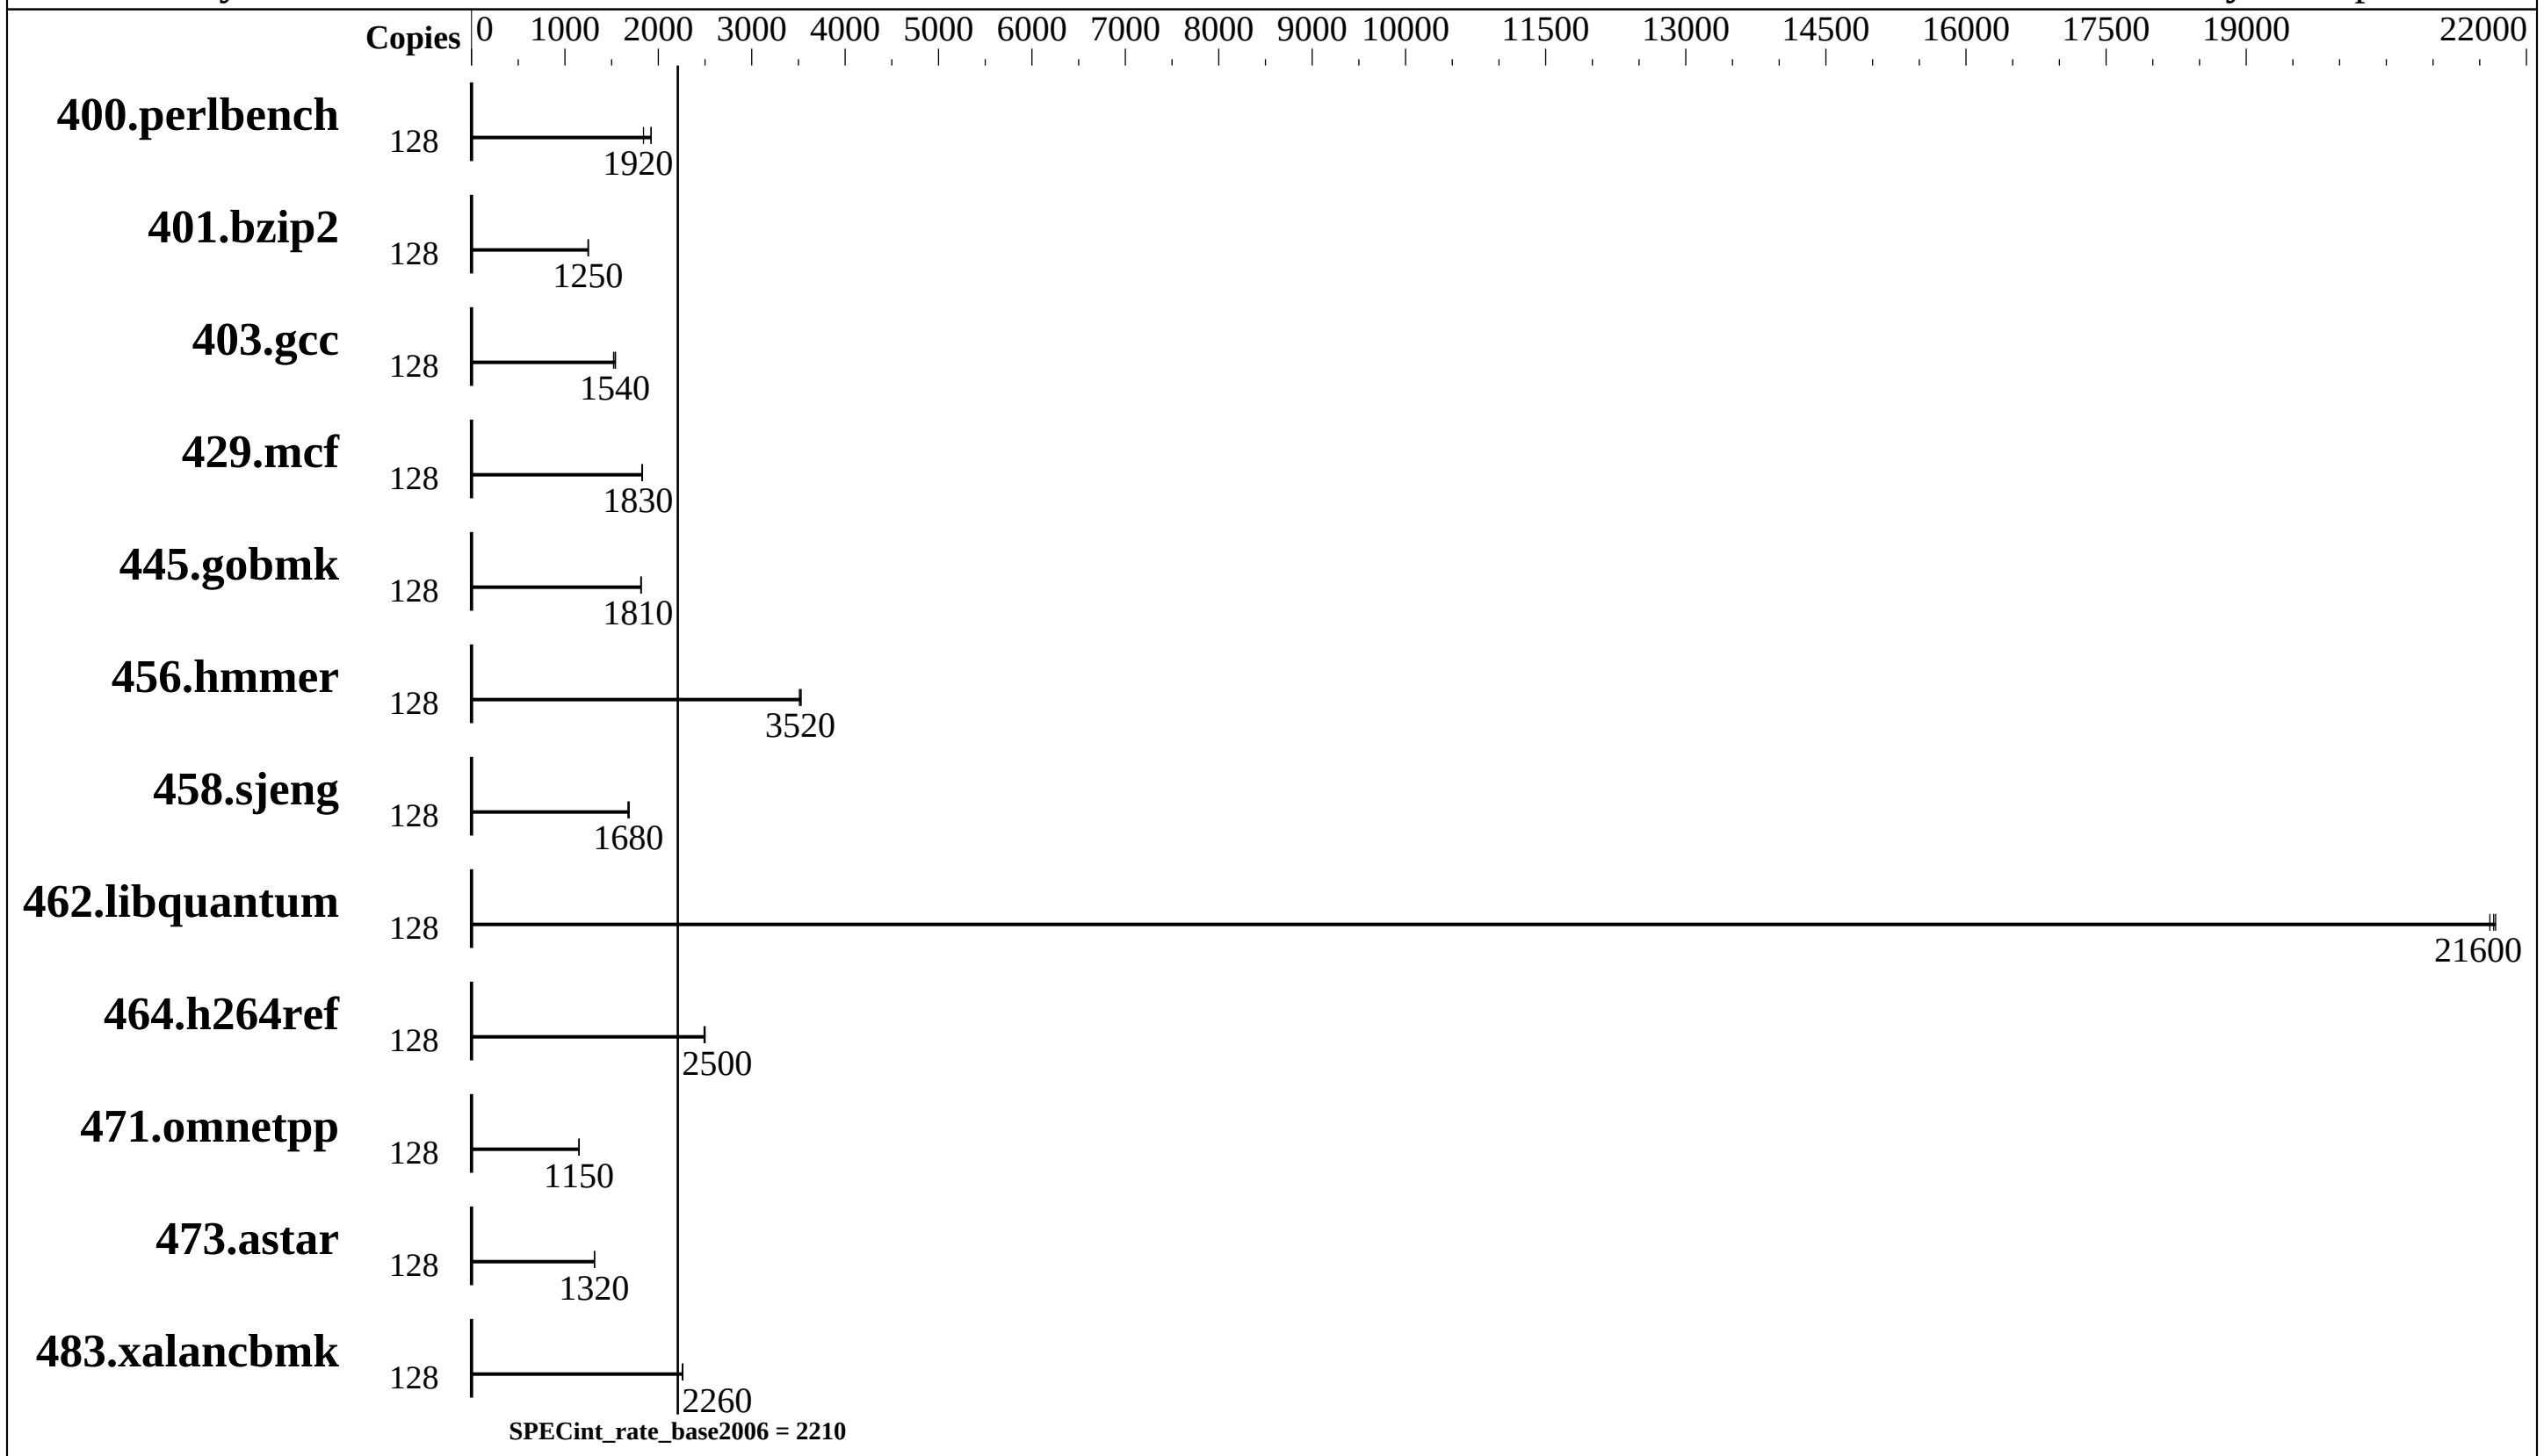

Hardware

CPU Name:	AMD EPYC 7601
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	64 cores, 2 chips, 32 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	64 KB I + 32 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	64 MB I+D on chip per chip, 8 MB shared / 4 cores
Other Cache:	None
Memory:	1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)
Disk Subsystem:	1 x 300 GB 15 K RPM SAS, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP3 Kernel 4.4.73-5-default
Compiler:	C/C++: Version 4.5.2.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	Not Applicable
Other Software:	MicroQuill SmartHeap 10.0 32-bit Library for Linux

Results Table

	Base							Peak						
Benchmark	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Copies**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	128	679	1840	**650**	**1920**	650	1920							
401.bzip2	128	987	1250	**989**	**1250**	990	1250							
403.gcc	128	678	1520	668	1540	**671**	**1540**							
429.mcf	128	640	1830	638	1830	**638**	**1830**							
445.gobmk	128	739	1820	**740**	**1810**	741	1810							
456.hmmer	128	338	3530	340	3510	**339**	**3520**							
458.sjeng	128	**921**	**1680**	918	1690	925	1680							
462.libquantum	128	122	21700	**123**	**21600**	123	21600							
464.h264ref	128	1137	2490	1133	2500	**1134**	**2500**							
471.omnetpp	128	**694**	**1150**	694	1150	696	1150							
473.astar	128	**683**	**1320**	683	1320	683	1320							
483.xalancbmk	128	**390**	**2260**	390	2260	391	2260							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
Set swappiness=1 to swap only if necessary
Set zone_reclaim_mode=1 to free local node memory and avoid remote memory
Linux governor set to performance with cpupower "cpupower frequency-set -r -g performance"

Transparent huge pages were enabled for this run (OS default)

Set vm/nr_hugepages=114688 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
 BIOS Configuration:
  Thermal Configuration set to Maximum Cooling
  Performance Determinism set to Power Deterministic
```

Continued on next page

Platform Notes (Continued)

```
Processor Power and Utilization Monitoring set to Disabled
Workload Pofile set to General Throughput Compute
 Minimum Processor Idle Power Core C-State set to C6 State
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/home/cpu2006/amd1603-rate-libs-revA/32:/home/cpu2006/amd1603-rate-libs-revA/64"

The binaries were built with the x86 Open64 Compiler Suite,
which is only available from (and supported by) AMD at
http://developer.amd.com/tools-and-sdks/cpu-development/x86-open64-compiler-suite/
```

Base Compiler Invocation

C benchmarks:
 opencc

C++ benchmarks:
 openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
 -march=bdver1 -mno-fma4 -mno-xop -mno-tbm

Continued on next page

Base Optimization Flags (Continued)

C++ benchmarks:

-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -mno-fma4 -mno-xop -mno-tbm
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-openflags-rate-revA-I.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revB.xml

Tested with SPEC CPU2006 v1.2.
Report generated on Mon Nov 20 12:43:40 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 November 2017.