SPEC® CINT2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 480 Gen10
(2.00 GHz, Intel Xeon Gold 6138)

SPECint®2006 = Not Run

SPECint_base2006 = 69.1

CPU2006 license:	3	**Test date:**	Nov-2017
Test sponsor:	HPE	**Hardware Availability:**	Oct-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

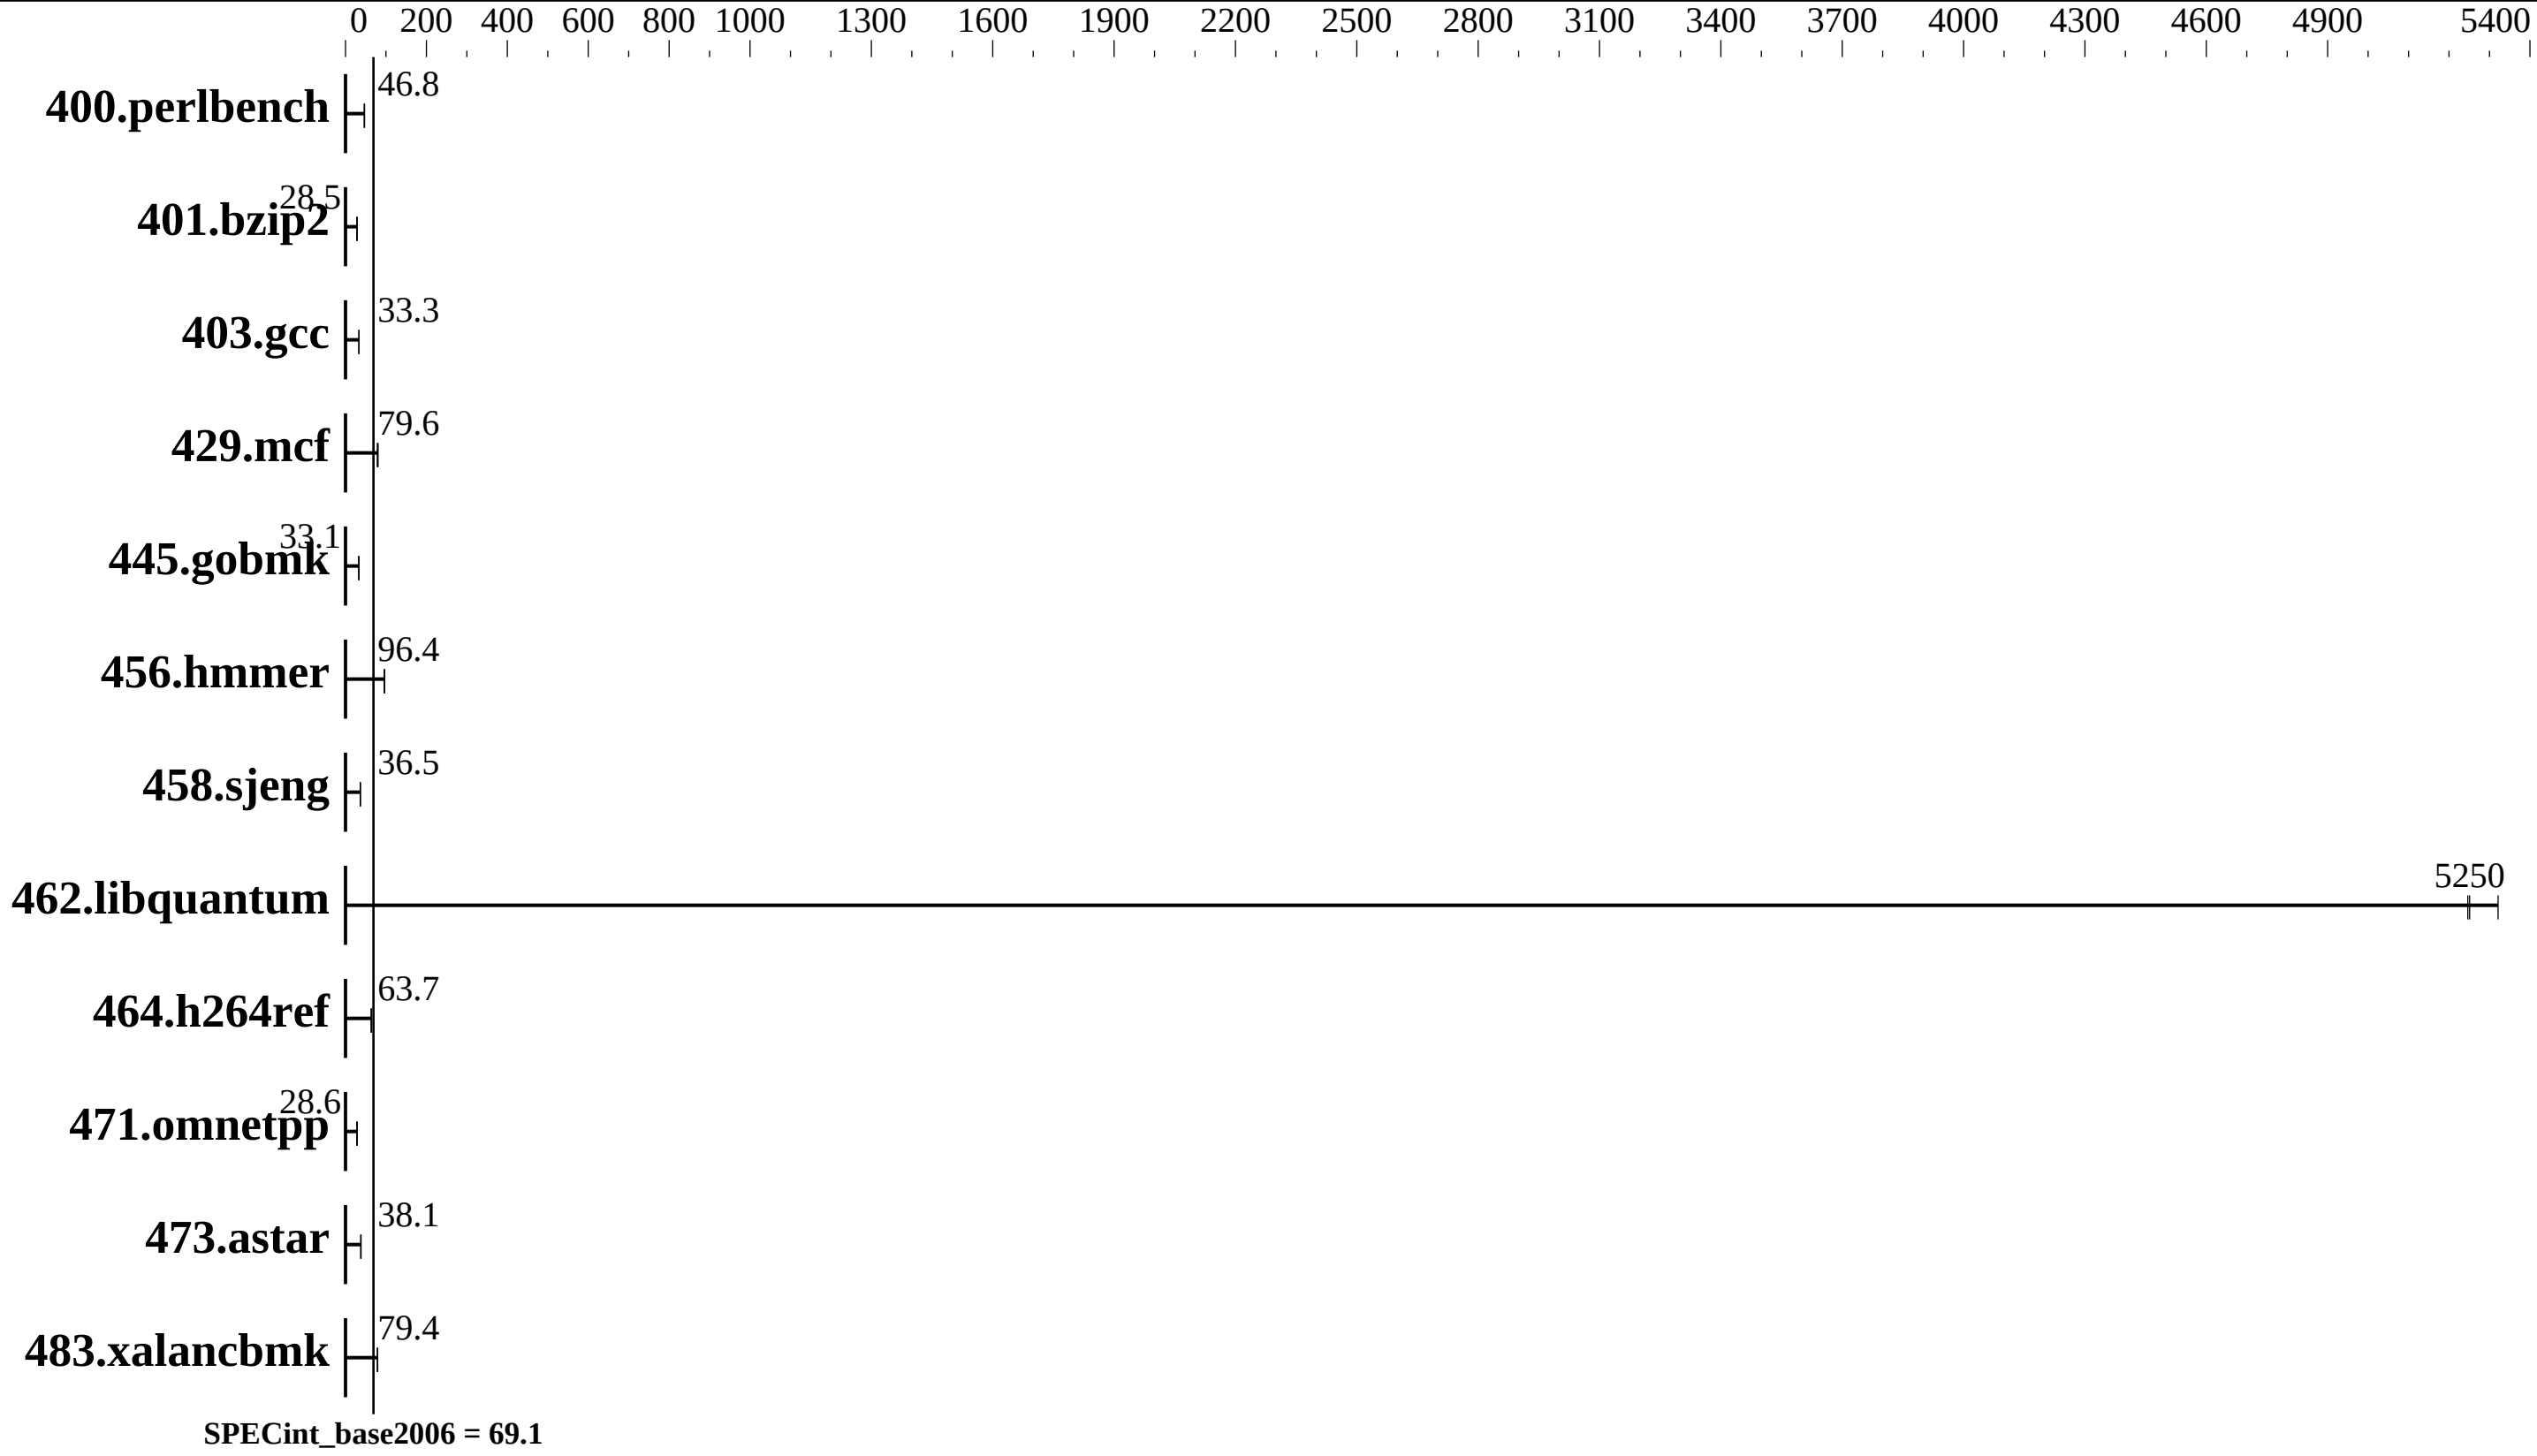

Hardware

CPU Name:	Intel Xeon Gold 6138
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	40 cores, 2 chips, 20 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	27.5 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)
Disk Subsystem:	1 x 960 GB SATA SSD, RAID 0
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 12 (x86_64) SP2 Kernel 4.4.21-69-default
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	Not Applicable
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

Synergy 480 Gen10
(2.00 GHz, Intel Xeon Gold 6138)

SPECint2006 = Not Run

SPECint_base2006 = 69.1

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Nov-2017
Hardware Availability: Oct-2017
Software Availability: Apr-2017

Results Table

	Base						Peak					
Benchmark	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
400.perlbench	209	46.8	**209**	**46.8**	209	46.8						
401.bzip2	339	28.5	339	28.5	**339**	**28.5**						
403.gcc	240	33.5	**241**	**33.3**	241	33.3						
429.mcf	113	80.4	**115**	**79.6**	116	78.7						
445.gobmk	317	33.1	**317**	**33.1**	317	33.1						
456.hmmer	**96.8**	**96.4**	96.3	96.9	97.1	96.1						
458.sjeng	332	36.5	332	36.5	**332**	**36.5**						
462.libquantum	3.89	5320	**3.95**	**5250**	3.95	5250						
464.h264ref	344	64.3	**347**	**63.7**	348	63.7						
471.omnetpp	**218**	**28.6**	217	28.9	221	28.2						
473.astar	185	37.9	184	38.2	**184**	**38.1**						
483.xalancbmk	87.5	78.9	**86.9**	**79.4**	86.9	79.4						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
IRQ balance service was stop using "service irqbalance stop"
Tuned-adm profile was set to Throughtput-Performance
```

Platform Notes

```
BIOS Configuration:
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
 Memory Patrol Scrubbing set to Disabled
 Workload Profile set to General Peak Frequency Compute
  Energy/Performance Bias set to Maximum Performance
 Workload Profile set to Custom
  NUMA Group Size Optimization set to Flat
 Sysinfo program /home/cpu2006/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on linux-vjuj Mon Nov 20 10:07:47 2017

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
```

Continued on next page

Platform Notes (Continued)

```
      model name : Intel(R) Xeon(R) Gold 6138 CPU @ 2.00GHz
         2 "physical id"s (chips)
         80 "processors"
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 20
         siblings  : 40
         physical 0: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
         physical 1: cores 0 1 2 3 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
      cache size : 28160 KB

   From /proc/meminfo
      MemTotal:       395921388 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      SUSE Linux Enterprise Server 12 SP2

   From /etc/*release* /etc/*version*
      SuSE-release:
         SUSE Linux Enterprise Server 12 (x86_64)
         VERSION = 12
         PATCHLEVEL = 2
         # This file is deprecated and will be removed in a future service pack or
         release.
         # Please check /etc/os-release for details about this release.
      os-release:
         NAME="SLES"
         VERSION="12-SP2"
         VERSION_ID="12.2"
         PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
         ID="sles"
         ANSI_COLOR="0;32"
         CPE_NAME="cpe:/o:suse:sles:12:sp2"

   uname -a:
      Linux linux-vjuj 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
      (9464f67) x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Nov 17 16:35

   SPEC is set to: /home/cpu2006
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda4      xfs   852G   75G  778G   9% /home
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page

Platform Notes (Continued)

```
    BIOS HPE I42 09/27/2017
    Memory:
     24x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666 MHz

  (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact"
LD_LIBRARY_PATH = "/home/cpu2006/lib/ia32:/home/cpu2006/lib/intel64:/home/cpu2006/sh10.2"
OMP_NUM_THREADS = "80"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32

Continued on next page

Hewlett Packard Enterprise
(Test Sponsor: HPE)
Synergy 480 Gen10
(2.00 GHz, Intel Xeon Gold 6138)

SPECint2006 = Not Run
SPECint_base2006 = 69.1

CPU2006 license: 3		**Test date:**	Nov-2017
Test sponsor:	HPE	**Hardware Availability:**	Oct-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

Base Optimization Flags (Continued)

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revG.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Dec 12 17:06:38 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 December 2017.