SPEC® CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECint®2006 = 76.0

SPECint_base2006 = 72.8

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Apr-2017

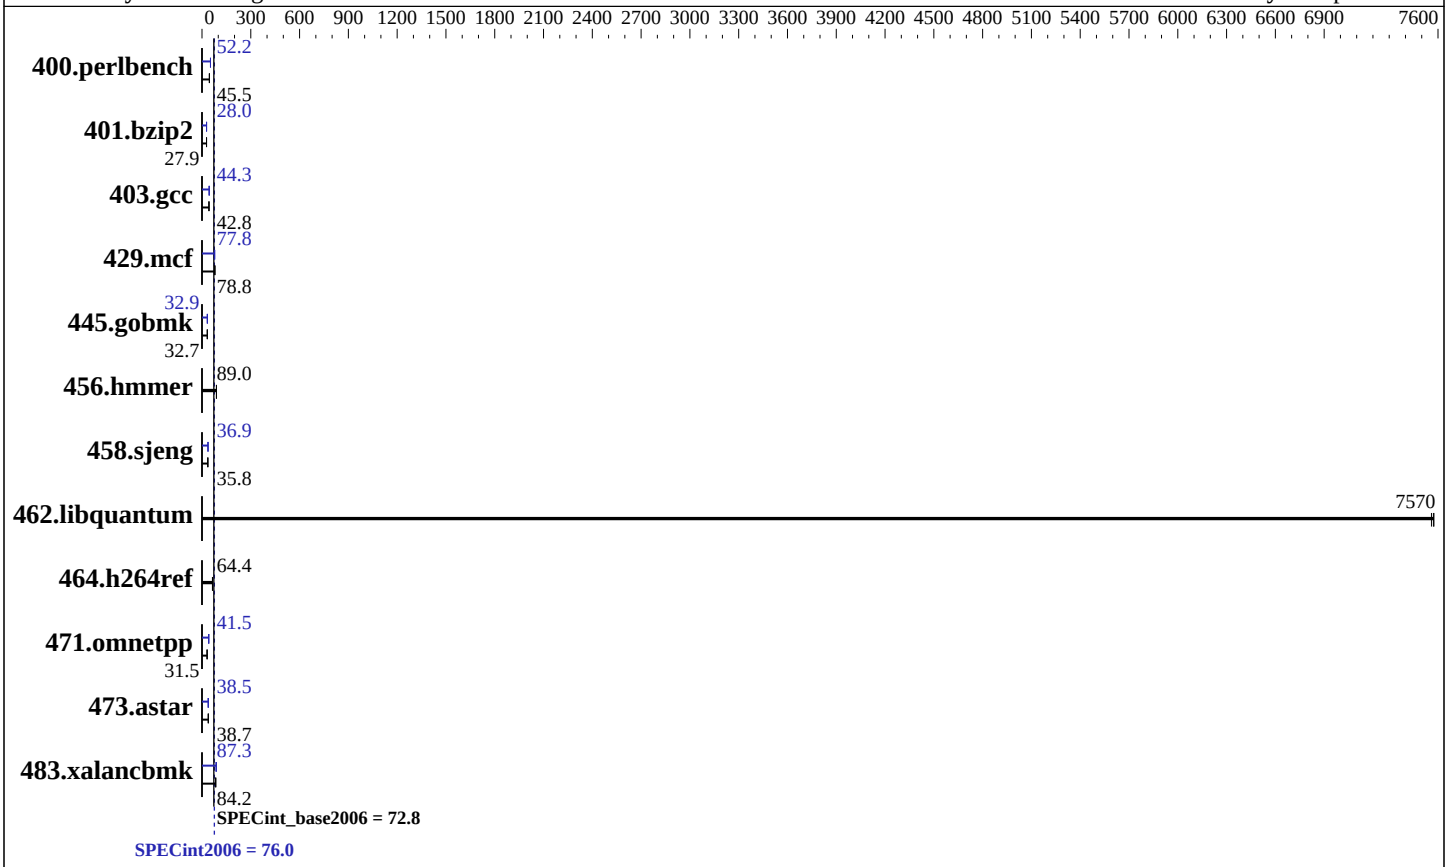

Hardware

CPU Name:	Intel Xeon Gold 6132
CPU Characteristics:	Intel Turbo Boost Technology up to 3.70 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	28 cores, 2 chips, 14 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	19.25 MB I+D on chip per chip
Other Cache:	None
Memory:	384 GB (12 x 32 GB 2Rx8 PC4-2667V-R)
Disk Subsystem:	1 x 1.0 TB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo) 3.10.0-514.el7.x86_64
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
Auto Parallel:	Yes
File System:	xfs
System State:	Run level 3 (Multi User)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.2

SPEC CINT2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Sugon

TC4600E(CX50-G30, Intel Gold 6132)

SPECint2006 = 76.0

SPECint_base2006 = 72.8

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Apr-2017

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	214	45.7	215	45.4	**215**	**45.5**	188	52.0	**187**	**52.2**	187	52.3
401.bzip2	346	27.9	**346**	**27.9**	346	27.9	**345**	**28.0**	344	28.0	345	28.0
403.gcc	**188**	**42.8**	187	43.0	188	42.8	182	44.3	182	44.3	**182**	**44.3**
429.mcf	**116**	**78.8**	114	79.7	116	78.3	120	76.1	**117**	**77.8**	117	78.1
445.gobmk	**321**	**32.7**	321	32.7	321	32.7	319	32.9	319	32.9	**319**	**32.9**
456.hmmer	105	89.1	**105**	**89.0**	105	88.5	105	89.1	**105**	**89.0**	105	88.5
458.sjeng	338	35.8	**338**	**35.8**	338	35.8	328	36.9	**328**	**36.9**	328	36.9
462.libquantum	2.74	7560	2.74	7580	**2.74**	**7570**	2.74	7560	2.74	7580	**2.74**	**7570**
464.h264ref	**344**	**64.4**	344	64.4	344	64.4	**344**	**64.4**	344	64.4	344	64.4
471.omnetpp	199	31.4	198	31.5	**198**	**31.5**	151	41.3	151	41.5	**151**	**41.5**
473.astar	181	38.9	**181**	**38.7**	181	38.7	182	38.6	183	38.4	**183**	**38.5**
483.xalancbmk	**82.0**	**84.2**	82.1	84.1	81.8	84.4	79.0	87.3	**79.0**	**87.3**	79.1	87.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /home/tianywan/benchmarks/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on localhost Sun Dec 10 00:59:33 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
      2 "physical id"s (chips)
      56 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 14
      siblings  : 28
      physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
      physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

Continued on next page

Platform Notes (Continued)

```
      cache size : 19712 KB

   From /proc/meminfo
      MemTotal:       394687848 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   From /etc/*release* /etc/*version*
      os-release:
         NAME="Red Hat Enterprise Linux Server"
         VERSION="7.3 (Maipo)"
         ID="rhel"
         ID_LIKE="fedora"
         VERSION_ID="7.3"
         PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
         ANSI_COLOR="0;31"
         CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
      redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
      system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

   uname -a:
      Linux localhost 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13 EDT 2016
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Dec 8 21:11

   SPEC is set to: /home/tianywan/benchmarks/cpu2006
      Filesystem            Type  Size  Used Avail Use% Mounted on
      /dev/mapper/rhel-home xfs   671G   41G  630G   7% /home
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS American Megatrends Inc. 0JGST024 11/15/2017American Megatrends Inc.
     0JGST024 11/15/2017
     Memory:
      24x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
      24x NO DIMM NO DIMM

    (End of data from sysinfo program)
  The dmidecode infomation displayed in sysinfo should have one line reading as:
  12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666 MHz
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/tianywan/benchmarks/cpu2006/lib/ia32:/home/tianywan/benchmarks/cpu2006/lib/intel64:/home/tianywan/benchmarks/cpu2006/sh10.2"
OMP_NUM_THREADS = "28"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
 Transparent Huge Pages enabled by default.
 Filesystem page cache cleared with:
 shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

Base Compiler Invocation

C benchmarks:
```
icc -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
  401.bzip2: -DSPEC_CPU_LP64
    403.gcc: -DSPEC_CPU_LP64
    429.mcf: -DSPEC_CPU_LP64
  445.gobmk: -DSPEC_CPU_LP64
  456.hmmer: -DSPEC_CPU_LP64
  458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
  464.h264ref: -DSPEC_CPU_LP64
  471.omnetpp: -DSPEC_CPU_LP64
    473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -parallel -qopt-prefetch
-auto-p32
```

C++ benchmarks:
```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh10.2 -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

445.gobmk: `icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

C++ benchmarks (except as noted below):
`icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-D_FILE_OFFSET_BITS=64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-D_FILE_OFFSET_BITS=64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX512`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div`(pass 2) `-qopt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xCORE-AVX512`(pass 2)
`-par-num-threads=1`(pass 1) `-ipo`(pass 2) `-O3`(pass 2)
`-no-prec-div -auto-ilp32 -qopt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

403.gcc: -xCORE-AVX512 -ipo -O3 -no-prec-div -inline-calloc
-qopt-malloc-options=3 -auto-ilp32

429.mcf: -xCORE-AVX512 -ipo -O3 -no-prec-div -parallel
-qopt-prefetch -auto-p32

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2)

456.hmmer: basepeak = yes

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -qopt-ra-region-strategy=block
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

473.astar: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-auto-p32 -Wl,-z,muldefs -L/sh10.2 -lsmartheap64

483.xalancbmk: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-Wl,-z,muldefs -L/sh10.2 -lsmartheap

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/Sugon-Purley-Platform-Settings-revA-I.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/Sugon-Purley-Platform-Settings-revA-I.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Wed Dec 27 12:06:19 2017 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 December 2017.