



SPEC® CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint®_rate2006 = 2100

ASUS RS700-E9(Z11PP-D24) Server System
(2.70 GHz, Intel Xeon Gold 6150)

SPECint_rate_base2006 = 2010

CPU2006 license: 9016


Test date: Oct-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

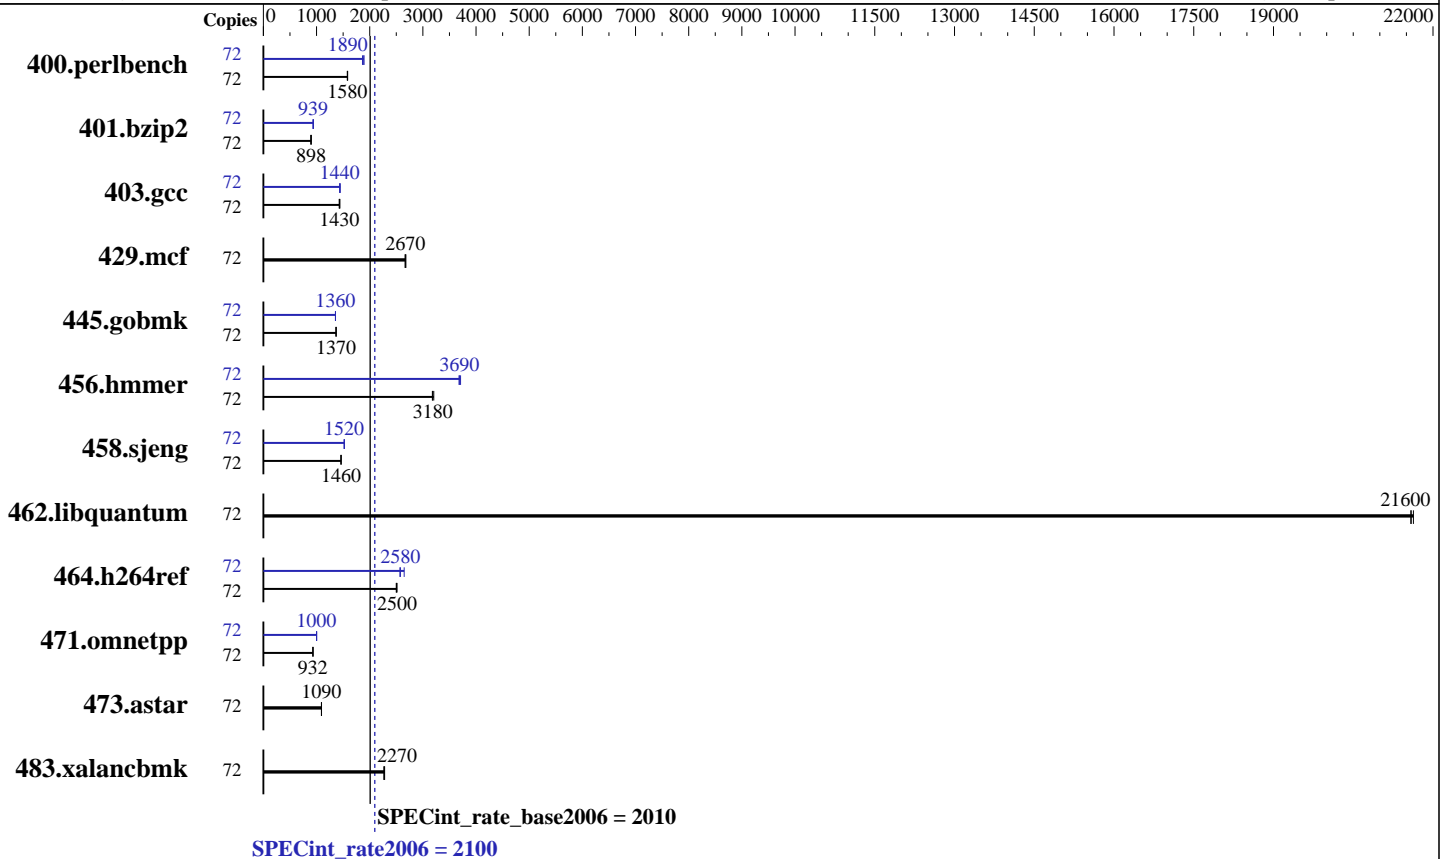

Hardware

CPU Name: Intel Xeon Gold 6150
 CPU Characteristics: Intel Turbo Boost Technology up to 3.70 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 36 cores, 2 chips, 18 cores/chip, 2 threads/core
 CPU(s) orderable: 1, 2 chip(s)
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 1 MB I+D on chip per core
 L3 Cache: 24.75 MB I+D on chip per chip
 Other Cache: None
 Memory: 384 GB (24 x 16 GB 2Rx4 PC4-2666V-R)
 Disk Subsystem: 1 x 480 GB SATA SSD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 12 (x86_64) SP2
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: btrfs
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 2100

ASUS RS700-E9(Z11PP-D24) Server System
(2.70 GHz, Intel Xeon Gold 6150)

SPECint_rate_base2006 = 2010

CPU2006 license: 9016

Test date: Oct-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	72	444	1590	445	1580	<u>445</u>	<u>1580</u>	72	377	1860	372	1890	<u>372</u>	<u>1890</u>
401.bzip2	72	779	891	771	901	<u>774</u>	<u>898</u>	72	745	932	<u>740</u>	<u>939</u>	738	942
403.gcc	72	407	1430	403	1440	<u>405</u>	<u>1430</u>	72	<u>403</u>	<u>1440</u>	403	1440	401	1440
429.mcf	72	246	2670	245	2680	<u>246</u>	<u>2670</u>	72	246	2670	245	2680	<u>246</u>	<u>2670</u>
445.gobmk	72	553	1370	<u>552</u>	<u>1370</u>	552	1370	72	<u>557</u>	<u>1360</u>	557	1360	557	1360
456.hammer	72	211	3180	<u>211</u>	<u>3180</u>	210	3200	72	<u>182</u>	<u>3690</u>	181	3710	183	3680
458.sjeng	72	<u>596</u>	<u>1460</u>	597	1460	596	1460	72	573	1520	<u>573</u>	<u>1520</u>	572	1520
462.libquantum	72	<u>69.1</u>	<u>21600</u>	69.1	21600	69.0	21600	72	<u>69.1</u>	<u>21600</u>	69.1	21600	69.0	21600
464.h264ref	72	<u>637</u>	<u>2500</u>	637	2500	634	2510	72	602	2650	<u>618</u>	<u>2580</u>	620	2570
471.omnetpp	72	482	933	<u>483</u>	<u>932</u>	483	932	72	450	1000	<u>450</u>	<u>1000</u>	450	1000
473.astar	72	462	1090	463	1090	<u>462</u>	<u>1090</u>	72	462	1090	463	1090	<u>462</u>	<u>1090</u>
483.xalancbmk	72	219	2270	<u>219</u>	<u>2270</u>	218	2280	72	219	2270	<u>219</u>	<u>2270</u>	218	2280

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Configuration:

SNC = Enabled

IMC interleaving = 1 way

Patrol Scrub = Disabled

VT-d = Disabled

ENERGY_PERF_BIAS_CFG mode = Performance

HyperThreading = Enabled

Sysinfo program /spec2006/config/sysinfo.rev6993

Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)

running on linux-pmm5 Fri Oct 27 09:21:25 2017

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 2100

ASUS RS700-E9(Z11PP-D24) Server System
(2.70 GHz, Intel Xeon Gold 6150)

SPECint_rate_base2006 = 2010

CPU2006 license: 9016

Test date: Oct-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Platform Notes (Continued)

```

2 "physical id"s (chips)
72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 18
siblings  : 36
physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 25344 KB

```

```

From /proc/meminfo
MemTotal:      394811308 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

```

uname -a:
Linux linux-pmm5 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016
(9464f67) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Oct 27 09:19

```

SPEC is set to: /spec2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda2       btrfs    426G   16G  409G   4% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0601 10/17/2017

Memory:
24x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666 MHz
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 2100

ASUS RS700-E9(Z11PP-D24) Server System
(2.70 GHz, Intel Xeon Gold 6150)

SPECint_rate_base2006 = 2010

CPU2006 license: 9016

Test date: Oct-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/spec2006/lib/ia32:/spec2006/lib/intel64:/spec2006/sh10.2"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default

Filesystem page cache cleared with:

```
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 2100

ASUS RS700-E9(Z11PP-D24) Server System
(2.70 GHz, Intel Xeon Gold 6150)

SPECint_rate_base2006 = 2010

CPU2006 license: 9016

Test date: Oct-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-qopt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh10.2 -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2017/linux/lib/ia32
```



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 2100

ASUS RS700-E9(Z11PP-D24) Server System
(2.70 GHz, Intel Xeon Gold 6150)

SPECint_rate_base2006 = 2010

CPU2006 license: 9016

Test date: Oct-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -D_FILE_OFFSET_BITS=64
 429.mcf: -D_FILE_OFFSET_BITS=64
 445.gobmk: -D_FILE_OFFSET_BITS=64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
 464.h264ref: -D_FILE_OFFSET_BITS=64
 471.omnetpp: -D_FILE_OFFSET_BITS=64
 473.astar: -D_FILE_OFFSET_BITS=64
 483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -auto-ilp32 -qopt-mem-layout-trans=3

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-prefetch -auto-ilp32
 -qopt-mem-layout-trans=3

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div
 -qopt-mem-layout-trans=3

429.mcf: basepeak = yes

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -qopt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
 -qopt-mem-layout-trans=3

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll4 -auto-ilp32
 -qopt-mem-layout-trans=3

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
 -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -unroll2 -qopt-mem-layout-trans=3

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

SPECint_rate2006 = 2100

ASUS RS700-E9(Z11PP-D24) Server System
(2.70 GHz, Intel Xeon Gold 6150)

SPECint_rate_base2006 = 2010

CPU2006 license: 9016

Test date: Oct-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
             -par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2)
             -qopt-ra-region-strategy=block
             -qopt-mem-layout-trans=3 -Wl,-z,muldefs
             -L/sh10.2 -lsmartheap
```

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform-Settings-z11-V1.3-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform-Settings-z11-V1.3-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 27 11:36:34 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 February 2018.