SPEC® CFP2006 Result

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen10
(2.80 GHz, Intel Xeon Gold 6143)

SPECfp®2006 = Not Run

SPECfp_base2006 = 144

CPU2006 license: 3
Test sponsor: HPE
Tested by: HPE

Test date: Dec-2017
Hardware Availability: Dec-2017
Software Availability: Apr-2017

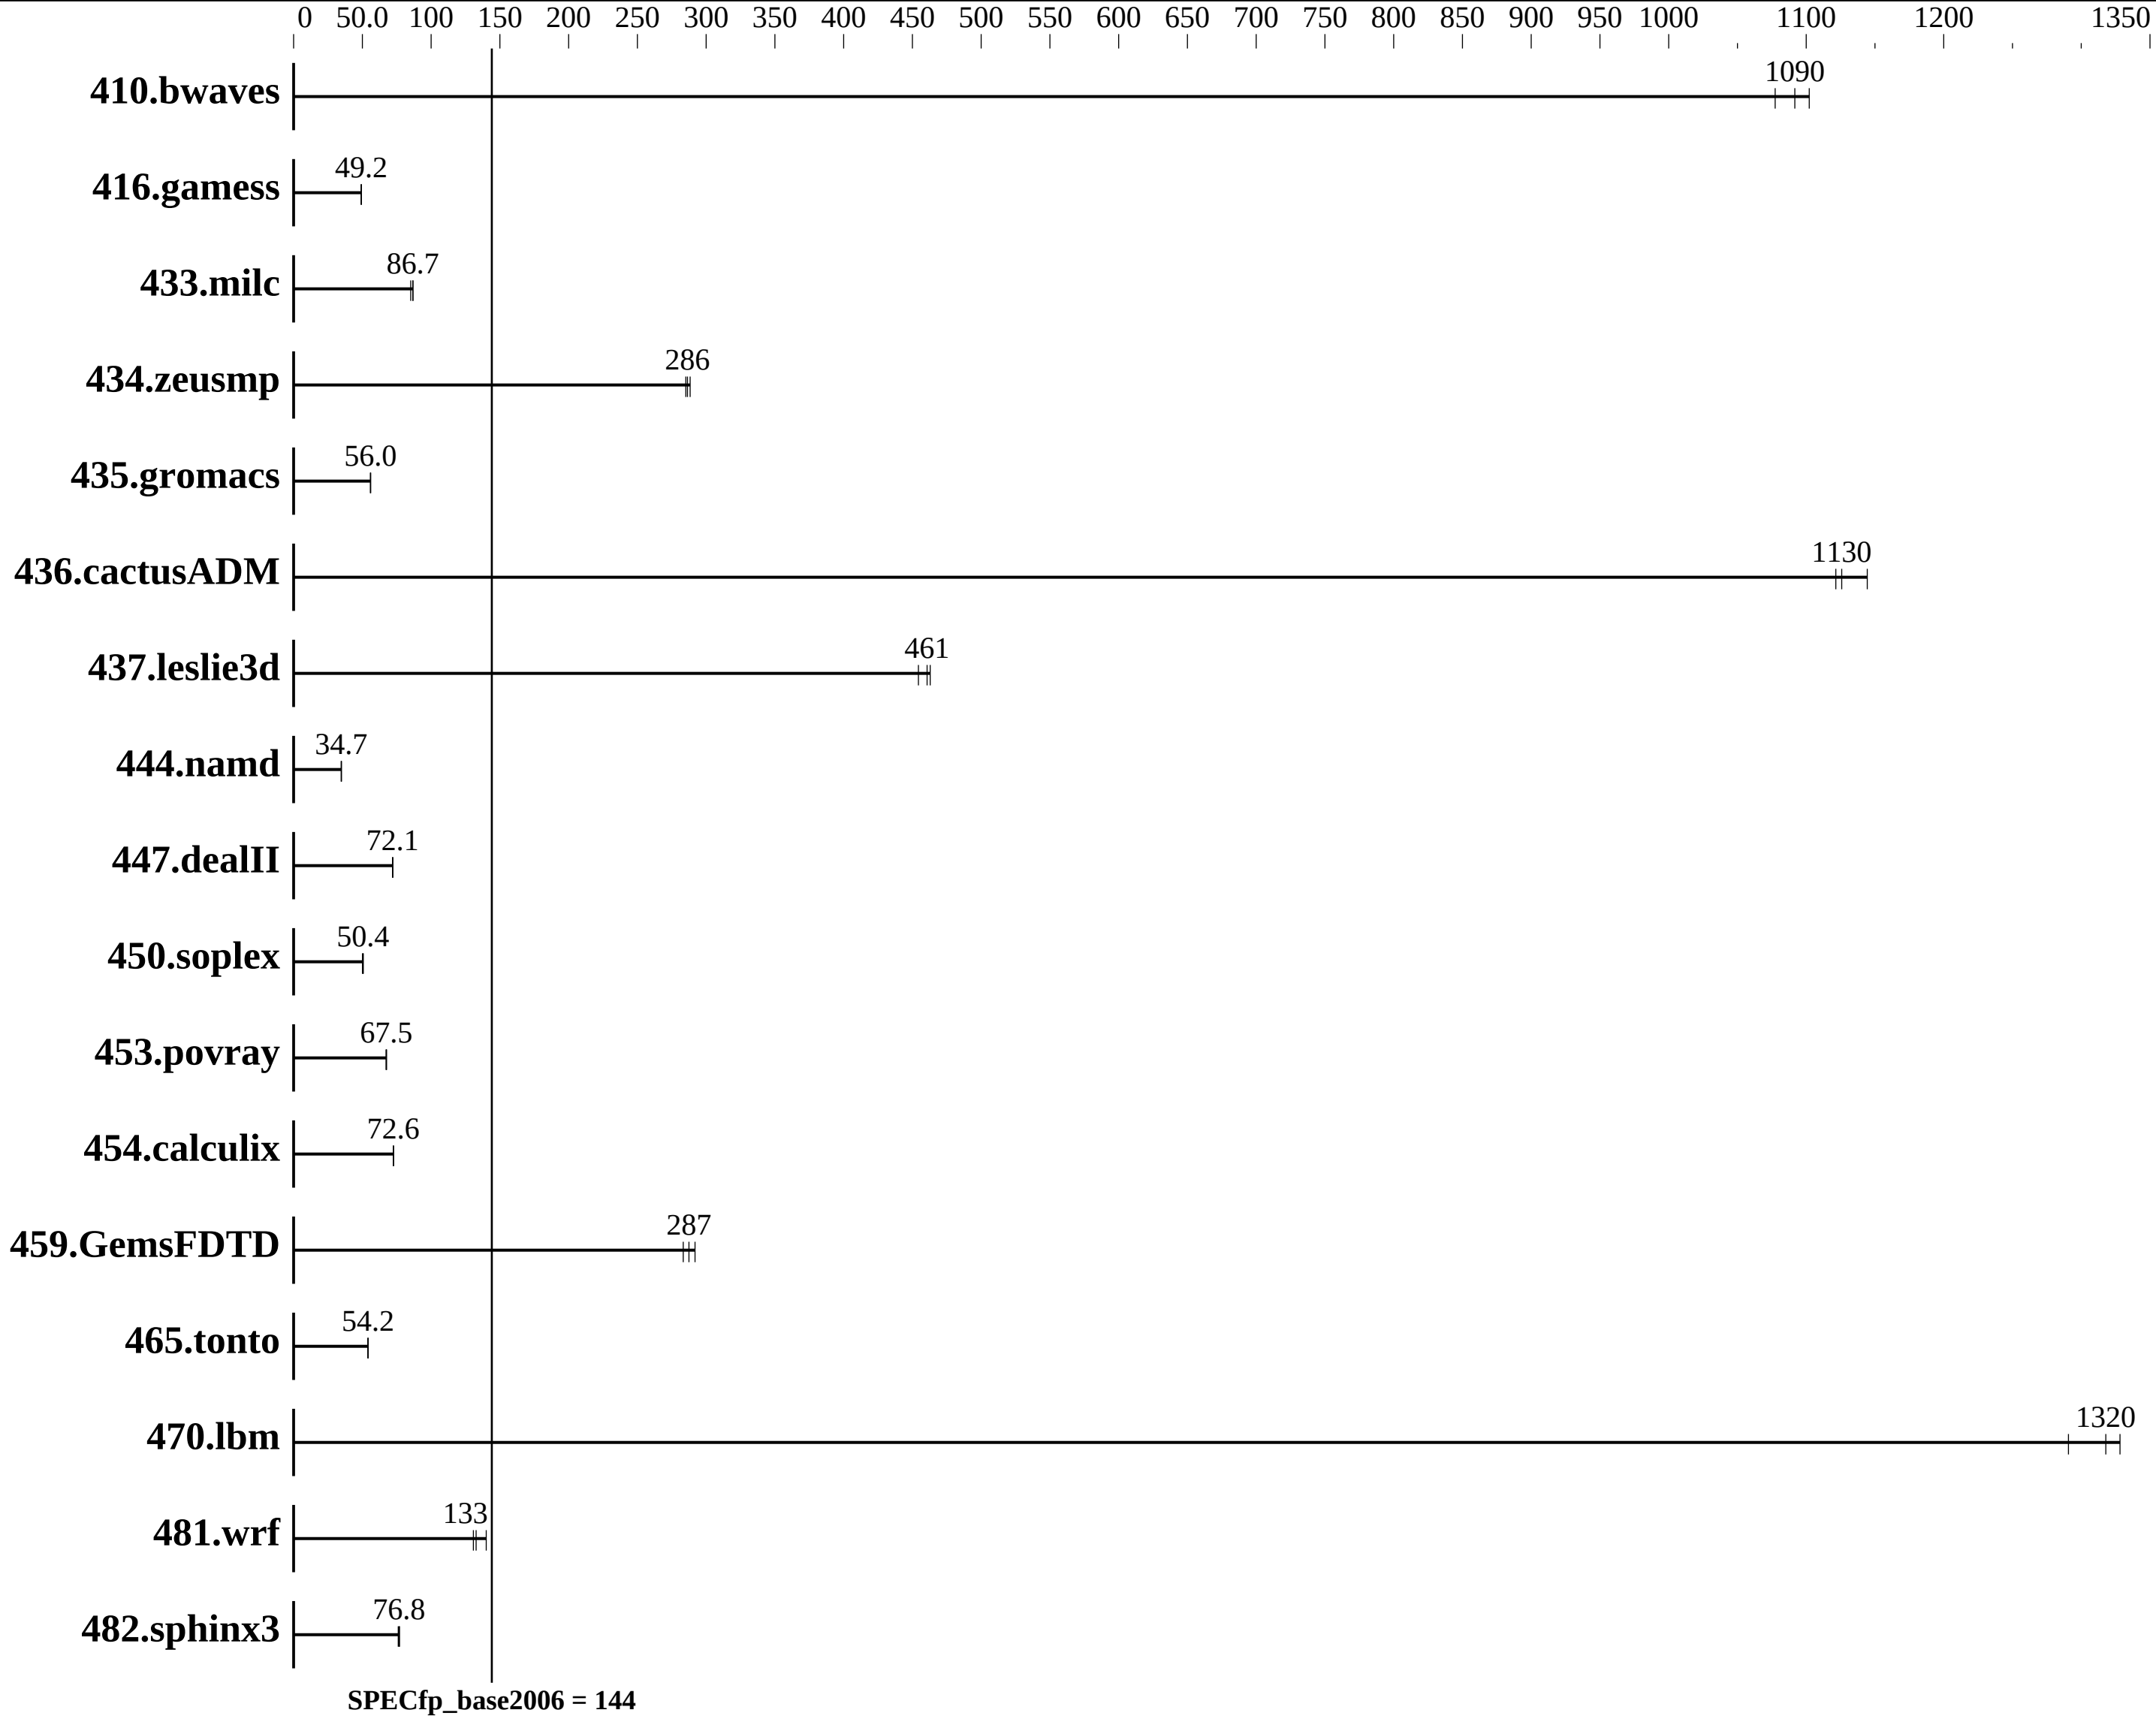

Hardware

CPU Name:	Intel Xeon Gold 6143
CPU Characteristics:	Intel Turbo Boost Technology up to 4.00 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	32 cores, 2 chips, 16 cores/chip
CPU(s) orderable:	1, 2 chip(s)
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 7.3 (Maipo) Kernel 3.10.0-514.el7.x86_64
Compiler:	C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux; Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux
Auto Parallel:	Yes
File System:	xfs

Continued on next page

SPEC CFP2006 Result

Hewlett Packard Enterprise
(Test Sponsor: HPE)

ProLiant DL360 Gen10
(2.80 GHz, Intel Xeon Gold 6143)

SPECfp2006 = Not Run

SPECfp_base2006 = 144

CPU2006 license:	3	**Test date:**	Dec-2017
Test sponsor:	HPE	**Hardware Availability:**	Dec-2017
Tested by:	HPE	**Software Availability:**	Apr-2017

L3 Cache:	22 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other Cache:	None	Base Pointers:	64-bit
Memory:	192 GB (24 x 8 GB 2Rx8 PC4-2666V-R)	Peak Pointers:	Not Applicable
Disk Subsystem:	1 x 480 GB SATA SSD, RAID 0	Other Software:	None
Other Hardware:	None		

Results Table

	Base						Peak					
Benchmark	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**	**Seconds**	**Ratio**
410.bwaves	12.6	1080	12.3	1100	**12.4**	**1090**						
416.gamess	398	49.2	**398**	**49.2**	398	49.2						
433.milc	**106**	**86.7**	106	86.8	108	85.2						
434.zeusmp	31.9	285	**31.8**	**286**	31.6	288						
435.gromacs	**128**	**56.0**	128	55.9	128	56.0						
436.cactusADM	10.7	1120	**10.6**	**1130**	10.4	1140						
437.leslie3d	20.7	454	**20.4**	**461**	20.3	463						
444.namd	231	34.7	231	34.7	**231**	**34.7**						
447.dealII	159	72.0	**159**	**72.1**	159	72.1						
450.soplex	165	50.7	167	50.1	**165**	**50.4**						
453.povray	79.2	67.2	78.8	67.5	**78.8**	**67.5**						
454.calculix	114	72.5	114	72.6	**114**	**72.6**						
459.GemsFDTD	37.4	283	**36.9**	**287**	36.3	292						
465.tonto	182	54.0	182	54.2	**182**	**54.2**						
470.lbm	10.6	1290	**10.4**	**1320**	10.3	1330						
481.wrf	**84.2**	**133**	79.7	140	85.4	131						
482.sphinx3	256	76.1	**254**	**76.8**	253	77.0						

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled by default
Filesystem page cache cleared with:
shell invocation of 'sync; echo 3 > /proc/sys/vm/drop_caches' prior to run
IRQ balance service was stop using "service irqbalance stop"
Tuned-adm profile was set to Throughput-Performance
```

Platform Notes

```
BIOS Configuration:
 Intel Hyperthreading set to Disabled
 Thermal Configuration set to Maximum Cooling
 LLC Prefetch set to Enabled
 LLC Dead Line Allocation set to Disabled
```

Continued on next page

Platform Notes (Continued)

```
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Peak Frequency Compute
 Energy/Performance Bias set to Maximum Performance
Workload Profile set to Custom
 NUMA Group Size Optimization set to Flat
Sysinfo program /home/specuser/cpu2006/config/sysinfo.rev6993
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
running on dl360Gen10rhel73Unit2 Fri Dec  8 00:10:00 2017

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) Gold 6143 CPU @ 2.80GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 16
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
      physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
   cache size : 22528 KB

From /proc/meminfo
   MemTotal:       197572720 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux Server"
      VERSION="7.3 (Maipo)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="7.3"
      PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
      ANSI_COLOR="0;31"
      CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
   redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

uname -a:
   Linux dl360Gen10rhel73Unit2 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
   EDT 2016 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Dec 7 14:21

SPEC is set to: /home/specuser/cpu2006
```

Continued on next page

Platform Notes (Continued)

```
    Filesystem              Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   392G   36G  357G  10% /home
 Additional information from dmidecode:

    Warning: Use caution when you interpret this section. The 'dmidecode' program
    reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to
    hardware, firmware, and the "DMTF SMBIOS" standard.

   BIOS HPE U32 09/29/2017
   Memory:
    24x UNKNOWN NOT AVAILABLE 8 GB 2 rank 2666 MHz

 (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=core,compact"
LD_LIBRARY_PATH = "/home/specuser/cpu2006/lib/ia32:/home/specuser/cpu2006/lib/intel64:/home/specuser/cpu2006/sh10.2"
OMP_NUM_THREADS = "32"

 Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
 memory using Redhat Enterprise Linux 7.2
```

Base Compiler Invocation

C benchmarks:
`icc -m64`

C++ benchmarks:
`icpc -m64`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main

Continued on next page

Base Portability Flags (Continued)

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml
http://www.spec.org/cpu2006/flags/HPE-Platform-Flags-Intel-V1.2-SKX-revH.xml

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Jan 16 12:09:27 2018 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 January 2018.