



# SPEC® CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp®2006 = **151**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.10 GHz, Intel Xeon Platinum 8176)

SPECfp\_base2006 = **144**

CPU2006 license: 9016


Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

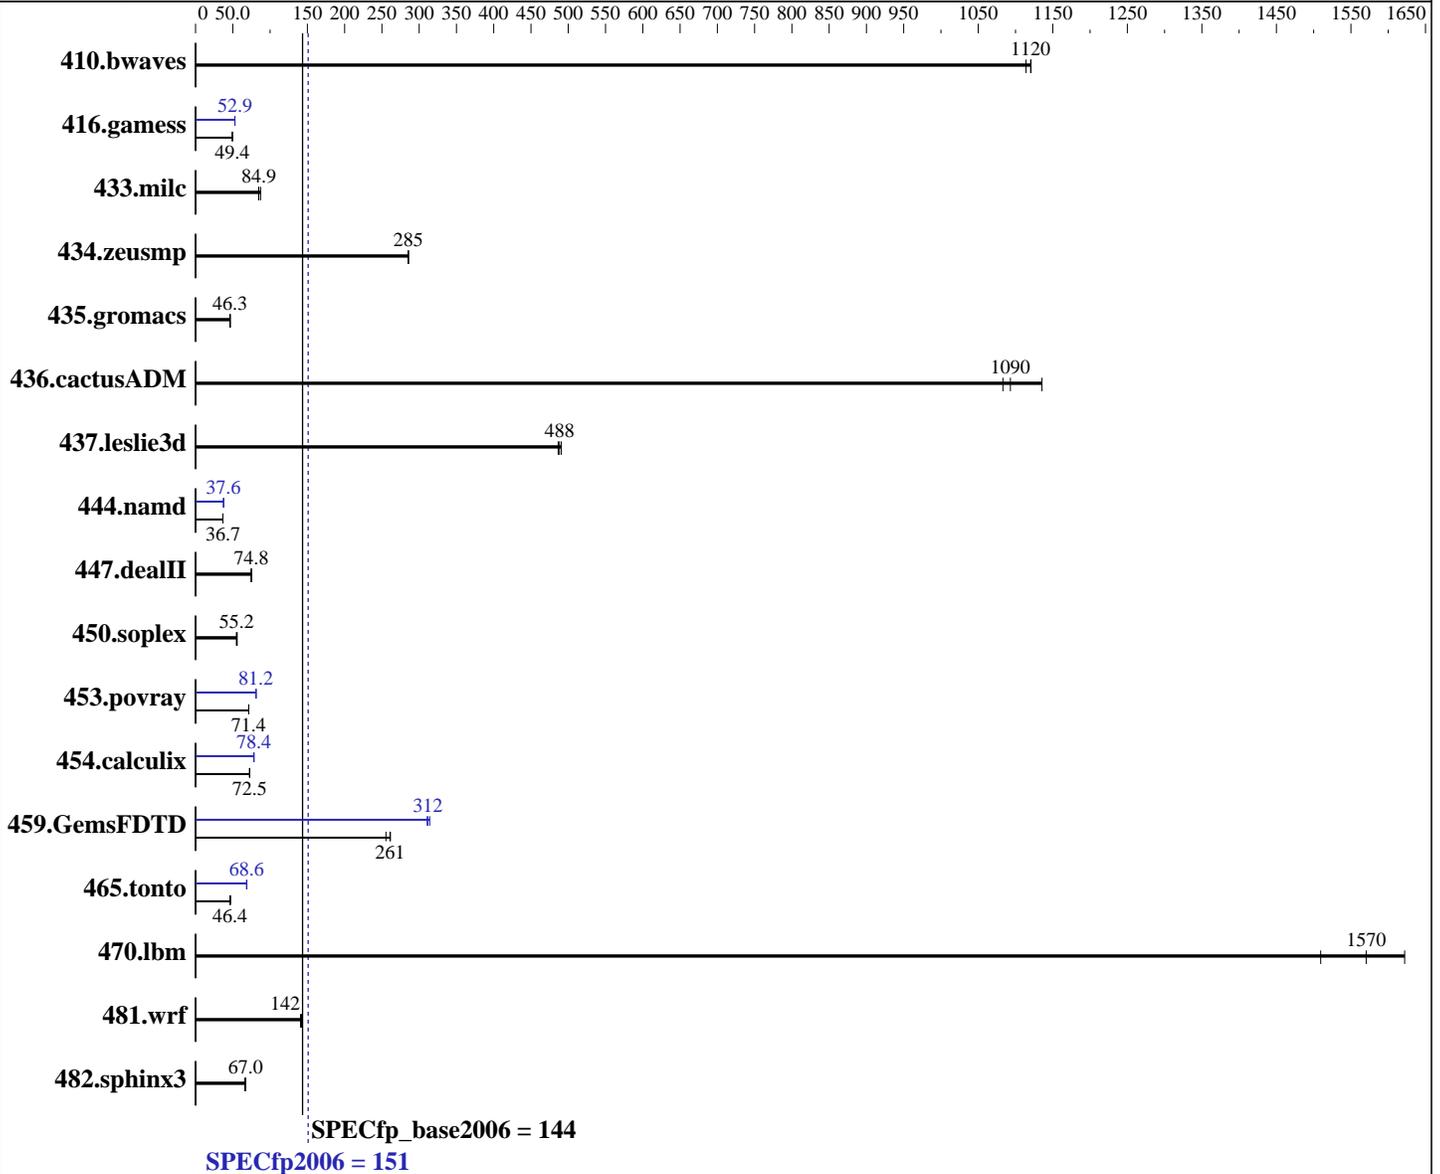

### Hardware

CPU Name: Intel Xeon Platinum 8176  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 56 cores, 2 chips, 28 cores/chip  
 CPU(s) orderable: 1, 2 chip(s)  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release (x86\_64) 7.3 (Maipo)  
 Kernel 3.10.0-514.el7.x86\_64  
 Compiler: C/C++: Version 17.0.3.191 of Intel C/C++ Compiler for Linux;  
 Fortran: Version 17.0.3.191 of Intel Fortran Compiler for Linux  
 Auto Parallel: Yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp2006 = **151**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.10 GHz, Intel Xeon Platinum 8176)

SPECfp\_base2006 = **144**

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

L3 Cache: 38.5 MB I+D on chip per chip  
Other Cache: None  
Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2666V-R)  
Disk Subsystem: 1 x 240 GB SATA SSD  
Other Hardware: None

File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12.2	1110	<u>12.1</u>	<u>1120</u>	12.1	1120	12.2	1110	<u>12.1</u>	<u>1120</u>	12.1	1120
416.gamess	<b>396</b>	<b>49.4</b>	396	49.4	397	49.4	370	52.9	<b>370</b>	<b>52.9</b>	372	52.7
433.milc	105	87.3	109	84.5	<b>108</b>	<b>84.9</b>	105	87.3	109	84.5	<b>108</b>	<b>84.9</b>
434.zeusmp	31.9	286	<b>31.9</b>	<b>285</b>	31.9	285	31.9	286	<b>31.9</b>	<b>285</b>	31.9	285
435.gromacs	154	46.2	153	46.6	<b>154</b>	<b>46.3</b>	154	46.2	153	46.6	<b>154</b>	<b>46.3</b>
436.cactusADM	10.5	1140	11.0	1080	<b>10.9</b>	<b>1090</b>	10.5	1140	11.0	1080	<b>10.9</b>	<b>1090</b>
437.leslie3d	19.3	486	<b>19.3</b>	<b>488</b>	19.2	491	19.3	486	<b>19.3</b>	<b>488</b>	19.2	491
444.namd	218	36.7	219	36.7	<b>218</b>	<b>36.7</b>	213	37.6	<b>213</b>	<b>37.6</b>	213	37.6
447.dealII	154	74.5	<b>153</b>	<b>74.8</b>	152	75.2	154	74.5	<b>153</b>	<b>74.8</b>	152	75.2
450.soplex	149	55.9	<b>151</b>	<b>55.2</b>	152	54.9	149	55.9	<b>151</b>	<b>55.2</b>	152	54.9
453.povray	<b>74.5</b>	<b>71.4</b>	74.5	71.4	74.5	71.4	65.7	81.0	<b>65.5</b>	<b>81.2</b>	65.5	81.3
454.calculix	114	72.7	<b>114</b>	<b>72.5</b>	114	72.4	<b>105</b>	<b>78.4</b>	106	78.1	105	78.5
459.GemsFDTD	<b>40.7</b>	<b>261</b>	40.6	261	41.5	255	34.2	311	<b>34.0</b>	<b>312</b>	33.8	314
465.tonto	210	47.0	<b>212</b>	<b>46.4</b>	213	46.2	143	68.9	144	68.4	<b>143</b>	<b>68.6</b>
470.lbm	9.10	1510	8.47	1620	<b>8.75</b>	<b>1570</b>	9.10	1510	8.47	1620	<b>8.75</b>	<b>1570</b>
481.wrf	79.3	141	<b>78.9</b>	<b>142</b>	78.6	142	79.3	141	<b>78.9</b>	<b>142</b>	78.6	142
482.sphinx3	295	66.1	<b>291</b>	<b>67.0</b>	290	67.2	295	66.1	<b>291</b>	<b>67.0</b>	290	67.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Configuration:  
SNC = Disabled  
IMC interleaving = AUTO  
Patrol Scrub = Disabled  
VT-d = Disabled  
HyperThreading = Disabled  
Sysinfo program /spec2006/config/sysinfo.rev6993  
Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)  
running on localhost.localdomain Thu Dec 21 19:41:22 2017

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECfp2006 = **151**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.10 GHz, Intel Xeon Platinum 8176)

SPECfp\_base2006 = **144**

CPU2006 license: 9016

Test date: Dec-2017

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Jul-2017

Tested by: ASUSTeK Computer Inc.

Software Availability: Apr-2017

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
 2 "physical id"s (chips)
 56 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 28
  siblings     : 28
  physical 0   : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                25 26 27 28 29 30
  physical 1   : cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24
                25 26 27 28 29 30
cache size     : 39424 KB

```

From /proc/meminfo

```

MemTotal:      790962784 kB
HugePages_Total: 0
Hugepagesize:   2048 kB

```

From /etc/\*release\* /etc/\*version\*

```

os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.3 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.3"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.3 (Maipo)"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.3:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.3 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.3:ga:server

```

uname -a:

```

Linux localhost.localdomain 3.10.0-514.el7.x86_64 #1 SMP Wed Oct 19 11:24:13
EDT 2016 x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Dec 21 15:32

SPEC is set to: /spec2006

```

Filesystem      Type      Size      Used Avail Use% Mounted on
/dev/sda3        xfs       220G      60G  160G  28% /

```

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 151**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp\_base2006 = 144**

**CPU2006 license:** 9016

**Test date:** Dec-2017

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jul-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Apr-2017

## Platform Notes (Continued)

hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 0601 10/17/2017

Memory:

24x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,0,3"

LD\_LIBRARY\_PATH = "/spec2006/lib/ia32:/spec2006/lib/intel64:/spec2006/sh10.2"

OMP\_NUM\_THREADS = "56"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled by default.

Filesystem page cache cleared with:

shell invocation of 'sync; echo 3 > /proc/sys/vm/drop\_caches' prior to run

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 151**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp\_base2006 = 144**

**CPU2006 license:** 9016

**Test date:** Dec-2017

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jul-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Apr-2017

## Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

## Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 151**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp\_base2006 = 144**

**CPU2006 license:** 9016

**Test date:** Dec-2017

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jul-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Apr-2017

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2018 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECfp2006 = 151**

ASUS RS700-E9(Z11PP-D24) Server System  
(2.10 GHz, Intel Xeon Platinum 8176)

**SPECfp\_base2006 = 144**

**CPU2006 license:** 9016

**Test date:** Dec-2017

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Jul-2017

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Apr-2017

## Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -unroll2 -inline-level=0  
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)  
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -inline-alloc -qopt-malloc-options=3  
-auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.html>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform-Settings-z11-V1.3-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64-revF.xml>

<http://www.spec.org/cpu2006/flags/ASUSTekPlatform-Settings-z11-V1.3-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Feb 27 10:49:33 2018 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 February 2018.