



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204


Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

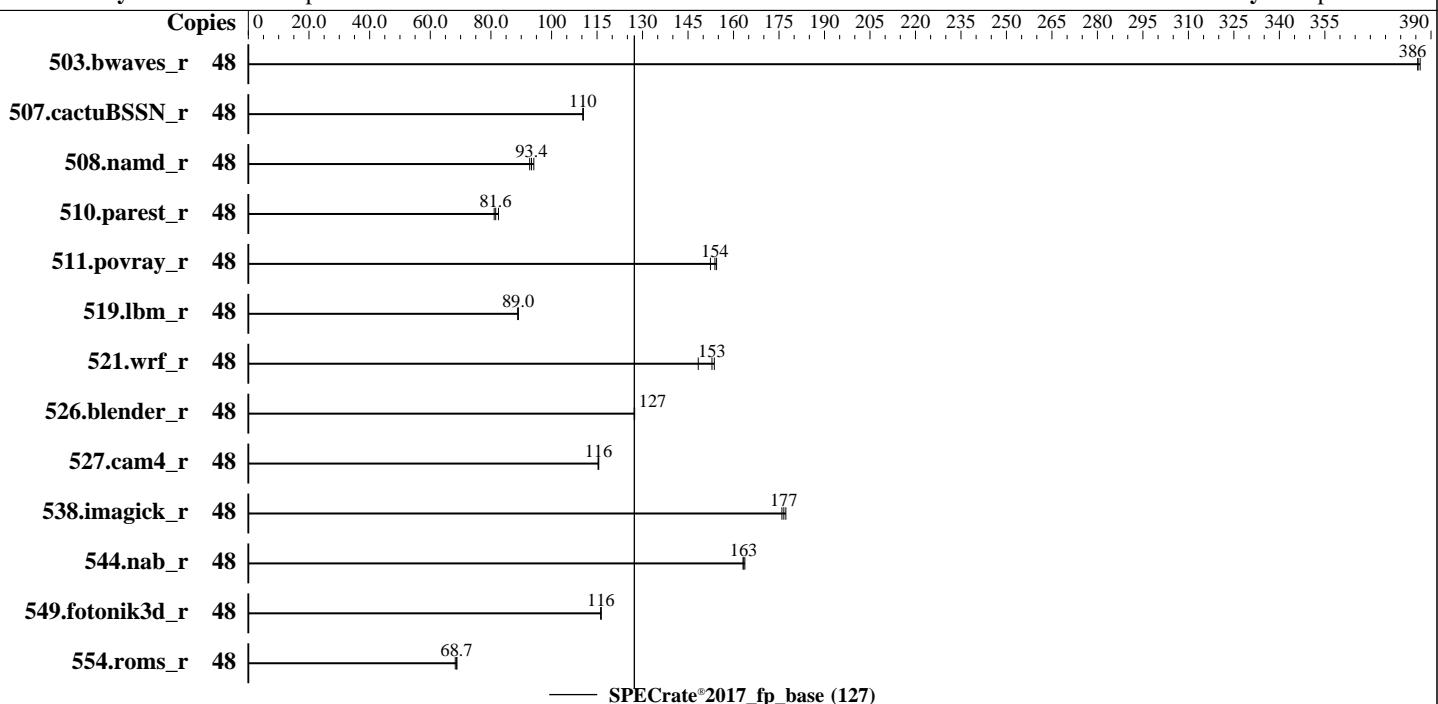

Hardware

CPU Name: Intel Xeon Gold 5118
Max MHz: 3200
Nominal: 2300
Enabled: 24 cores, 2 chips, 2 threads/core
Orderable: 1, 2 chip(s)
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 16.5 MB I+D on chip per chip
Other: None
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R,
running at 2400)
Storage: 1 x 1.6 TB SATA SSD
Other: None

OS:

SUSE Linux Enterprise Server 12 SP2

4.4.21-69-default

Compiler: C/C++: Version 18.0.1 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.1 of Intel Fortran
Compiler for Linux

No

Intel Version SE5C620.86B.0X.01.0007.060920171037 released Jun-2017

Parallel:
Firmware:
File System:
System State:
Base Pointers:
Peak Pointers:
Other:
Power Management: --

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

None

--

Software

SUSE Linux Enterprise Server 12 SP2

4.4.21-69-default

C/C++: Version 18.0.1 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.1 of Intel Fortran
Compiler for Linux

No

Intel Version SE5C620.86B.0X.01.0007.060920171037 released Jun-2017

xfs

Run level 3 (multi-user)

64-bit

Not Applicable

None

--



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204

Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	48	1248	386	1248	386	1246	386							
507.cactuBSSN_r	48	551	110	550	110	550	110							
508.namd_r	48	484	94.1	491	92.8	488	93.4							
510.parest_r	48	1522	82.5	1539	81.6	1549	81.1							
511.povray_r	48	736	152	726	154	728	154							
519.lbm_r	48	569	88.8	569	89.0	568	89.0							
521.wrf_r	48	725	148	703	153	700	154							
526.blender_r	48	574	127	574	127	574	127							
527.cam4_r	48	727	116	727	116	728	115							
538.imagick_r	48	678	176	673	177	676	177							
544.nab_r	48	493	164	494	163	495	163							
549.fotonik3d_r	48	1608	116	1609	116	1608	116							
554.roms_r	48	1110	68.7	1118	68.2	1109	68.8							

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "$/opt/intel/compiler_and_libraries/linux/lib/ia32_lin
:$/opt/intel/compiler_and_libraries/linux/lib/intel64_lin"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204

Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

General Notes (Continued)

is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS Configuration:

Patrol Scrub=Disabled

CPU and Power Performance Policy=Performance

Set Fan Profile=Performance

Sysinfo program /spec2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on taborlin1 Thu Dec 28 15:21:20 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204

Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

Platform Notes (Continued)

Byte Order:	Little Endian
CPU(s):	48
On-line CPU(s) list:	0-47
Thread(s) per core:	2
Core(s) per socket:	12
Socket(s):	2
NUMA node(s):	4
Vendor ID:	GenuineIntel
CPU family:	6
Model:	85
Model name:	Intel(R) Xeon(R) Gold 5118 CPU @ 2.30GHz
Stepping:	4
CPU MHz:	1000.000
CPU max MHz:	2301.0000
CPU min MHz:	1000.0000
BogoMIPS:	4589.25
Virtualization:	VT-x
L1d cache:	32K
L1i cache:	32K
L2 cache:	1024K
L3 cache:	16896K
NUMA node0 CPU(s):	0-2,6-8,24-26,30-32
NUMA node1 CPU(s):	3-5,9-11,27-29,33-35
NUMA node2 CPU(s):	12-14,18-20,36-38,42-44
NUMA node3 CPU(s):	15-17,21-23,39-41,45-47
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavewc xgetbv1 cqmq_llc cqmq_occup_llc

```
/proc/cpuinfo cache data
cache size : 16896 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 6 7 8 24 25 26 30 31 32
node 0 size: 95303 MB
node 0 free: 94816 MB
node 1 cpus: 3 4 5 9 10 11 27 28 29 33 34 35
node 1 size: 96753 MB
node 1 free: 96153 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204

Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

Platform Notes (Continued)

```
node 2 cpus: 12 13 14 18 19 20 36 37 38 42 43 44
node 2 size: 96753 MB
node 2 free: 96398 MB
node 3 cpus: 15 16 17 21 22 23 39 40 41 45 46 47
node 3 size: 96613 MB
node 3 free: 96249 MB
node distances:
node    0    1    2    3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

From /proc/meminfo
MemTotal:      394673864 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
Linux taborlin1 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67) x86_64
x86_64 x86_64 GNU/Linux

run-level 3 Dec 28 15:20

SPEC is set to: /spec2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/md126p1    xfs   1.0T   67G  958G   7%  /
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204

Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Intel Corporation SE5C620.86B.0X.01.0007.060920171037 06/09/2017

Memory:

24x Micron 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C           | 519.lbm_r(base) 538.imagick_r(base) 544.nab_r(base)
-----
icc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
C++          | 508.namd_r(base) 510.parest_r(base)
-----
icpc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
C++, C       | 511.povray_r(base) 526.blender_r(base)
-----
icpc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
C++, C, Fortran | 507.cactusBSSN_r(base)
-----
icpc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204

Test Date: Dec-2017

Test Sponsor: M Computers s.r.o.

Hardware Availability: Oct-2017

Tested by: M Computers s.r.o.

Software Availability: Sep-2017

Compiler Version Notes (Continued)

```
=====
Fortran      | 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
-----
```

```
ifort (IFORT) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran, C   | 521.wrf_r(base) 527.cam4_r(base)
-----
```

```
ifort (IFORT) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.1 20171018
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204

Test Sponsor: M Computers s.r.o.

Tested by: M Computers s.r.o.

Test Date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Portability Flags (Continued)

519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

(Continued on next page)



SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

M Computers s.r.o.

HPC S2600WFT
(2.30 GHz, Intel Xeon Gold 5118)

SPECrate®2017_fp_base = 127

SPECrate®2017_fp_peak = Not Run

CPU2017 License: 4204

Test Sponsor: M Computers s.r.o.

Tested by: M Computers s.r.o.

Test Date: Dec-2017

Hardware Availability: Oct-2017

Software Availability: Sep-2017

Base Other Flags (Continued)

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>
<http://www.spec.org/cpu2017/flags/MComputers-Platform-Settings-SKL-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>
<http://www.spec.org/cpu2017/flags/MComputers-Platform-Settings-SKL-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.2 on 2017-12-28 09:21:19-0500.

Report generated on 2020-02-04 11:56:06 by CPU2017 PDF formatter v6255.

Originally published on 2018-02-28.