



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

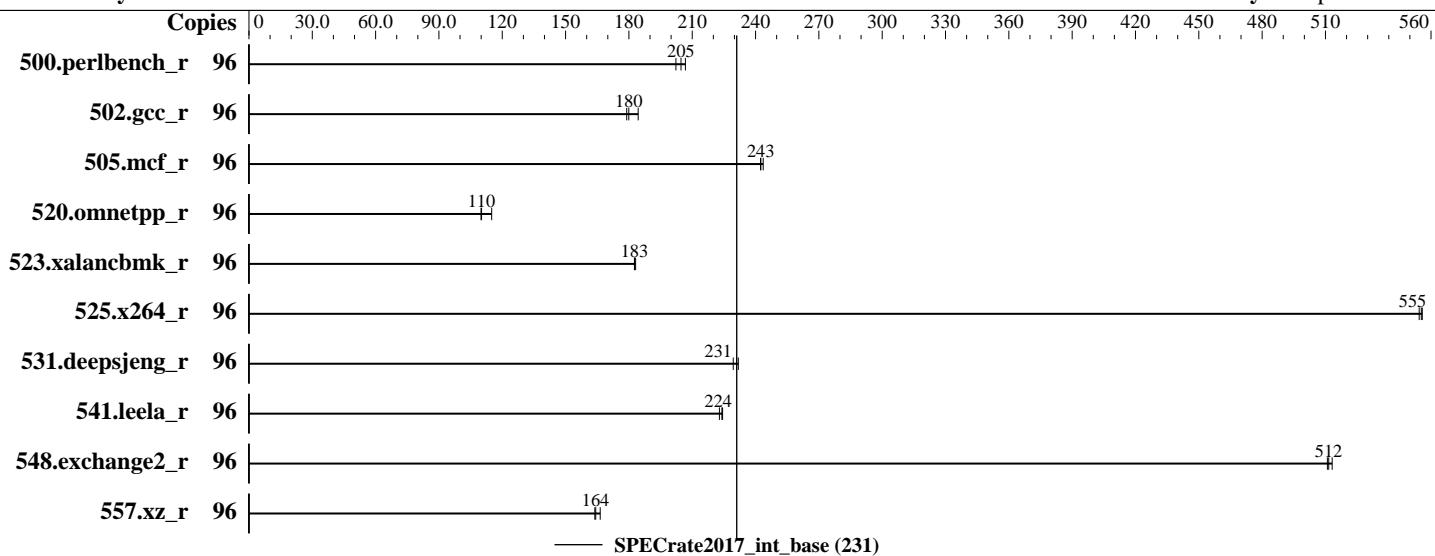

Hardware

CPU Name: Intel Xeon Platinum 8168
Max MHz.: 3700
Nominal: 2700
Enabled: 48 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 33 MB I+D on chip per chip
Other: None
Memory: 176 GB (11 x 16 GB 2Rx8 PC4-2666V-R)
Storage: 960 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86_64)
4.4.70-2-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Version 1.0.0 released Aug-2017
File System: btrfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: jemalloc: jemalloc memory allocator library
V5.0.1;



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	96	739	207	756	202	747	205									
502.gcc_r	96	737	184	755	180	760	179									
505.mcf_r	96	637	244	640	243	640	242									
520.omnetpp_r	96	1095	115	1143	110	1146	110									
523.xalancbmk_r	96	555	183	555	183	553	183									
525.x264_r	96	303	555	303	554	302	556									
531.deepsjeng_r	96	475	232	476	231	480	229									
541.leela_r	96	710	224	713	223	708	224									
548.exchange2_r	96	492	512	492	511	490	513									
557.xz_r	96	623	166	631	164	633	164									

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc: configured and built at default for

32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4,

and the system compiler gcc 4.8.5;

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

General Notes (Continued)

jemalloc: sources available via jemalloc.net

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

C States disabled

Memory Patrol Scrub disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-bek4 Sat Dec 9 04:19:46 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
  2 "physical id"s (chips)
  96 "processors"
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
siblings   : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
Stepping:               4
CPU MHz:                2700.119
BogoMIPS:              5400.23
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                33792K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
NUMA node1 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
NUMA node2 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
NUMA node3 CPU(s):     3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
           pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
           lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
           aperf mperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
           fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
           xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
           tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
           erms invpcid rtm cqm mpn avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
           avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occup_llc pkru ospke
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```
/proc/cpuinfo cache data
    cache size : 33792 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92
node 0 size: 46972 MB
node 0 free: 46658 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93
node 1 size: 32241 MB
node 1 free: 31982 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94
node 2 size: 48369 MB
node 2 free: 48127 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95
node 3 size: 48366 MB
node 3 free: 48088 MB
node distances:
node   0   1   2   3
 0: 10 21 11 21
 1: 21 10 21 11
 2: 11 21 10 21
 3: 21 11 21 10
```

From /proc/meminfo

```
MemTotal:      180172552 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```
Linux linux-bek4 4.4.70-2-default #1 SMP Wed Jun 7 15:12:06 UTC 2017 (4502c76) x86_64  
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 9 04:05
```

```
SPEC is set to: /root/cpu2017
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda7	btrfs	855G	28G	828G	4%	/

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Dell Inc. 1.0.0 08/10/2017
```

```
Memory:
```

8x 002C00B3002C 18ASF2G72PDZ-2G6D1	16 GB	2 rank	2666
3x 00AD00B300AD HMA82GR7AFR8N-VK	16 GB	2 rank	2666
5x Not Specified	Not Specified		

```
(End of data from sysinfo program)
```

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)  
-----
```

```
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)  
-----
```

```
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```

```
=====  
FC 548.exchange2_r(base)  
-----
```

```
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----
```



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc

Fortran benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Platinum 8168, 2.70 GHz)

SPECrate2017_int_base = 231

SPECrate2017_int_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-12-09 05:19:45-0500.

Report generated on 2018-10-31 16:37:44 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.