



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

**SPECrate2017\_fp\_base = 156**

**SPECrate2017\_fp\_peak = 159**

CPU2017 License: 55


**Test Date:** Feb-2018

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Sep-2017

**Tested by:** Dell Inc.

**Software Availability:** Sep-2017

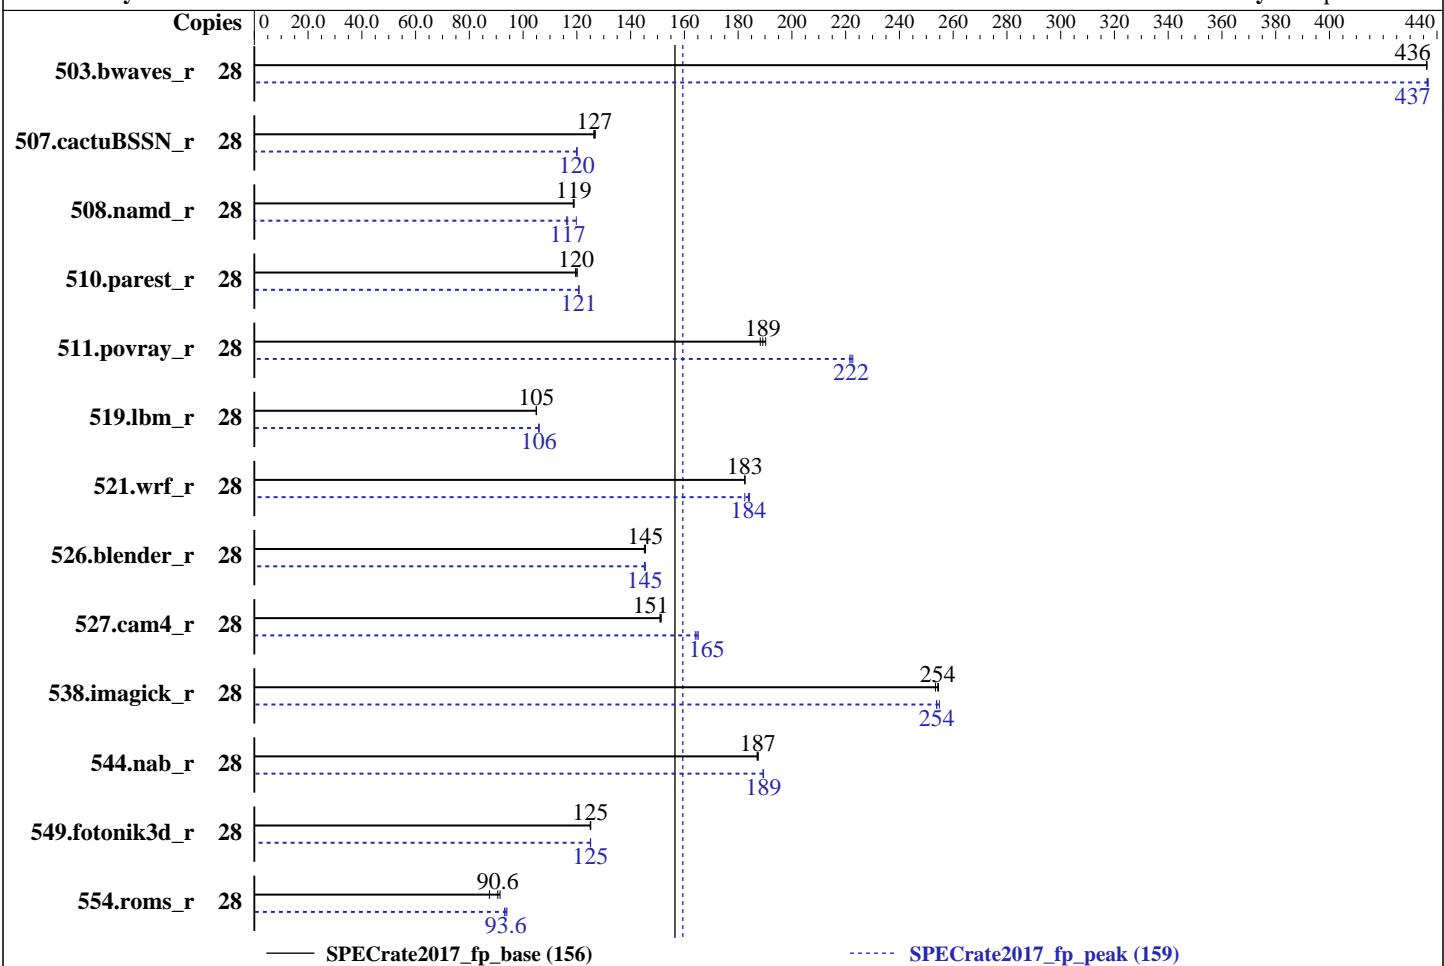

— SPECrate2017\_fp\_base (156)

····· SPECrate2017\_fp\_peak (159)

## Hardware

CPU Name: Intel Xeon Gold 6132  
 Max MHz.: 3700  
 Nominal: 2600  
 Enabled: 28 cores, 2 chips  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 19.25 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 TB SATA 7200 RPM  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP3 (x86\_64)  
 4.4.114-94.11-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.3.7 released Feb-2018  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

**SPECrate2017\_fp\_base = 156**

**SPECrate2017\_fp\_peak = 159**

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	28	<b>644</b>	<b>436</b>	644	436	644	436	28	644	436	<b>643</b>	<b>437</b>	643	437
507.cactuBSSN_r	28	279	127	281	126	<b>280</b>	<b>127</b>	28	295	120	<b>295</b>	<b>120</b>	296	120
508.namd_r	28	224	119	224	119	<b>224</b>	<b>119</b>	28	<b>228</b>	<b>117</b>	229	116	222	120
510.parest_r	28	610	120	<b>612</b>	<b>120</b>	613	120	28	<b>607</b>	<b>121</b>	607	121	606	121
511.povray_r	28	344	190	<b>346</b>	<b>189</b>	347	188	28	294	223	295	222	<b>294</b>	<b>222</b>
519.lbm_r	28	<b>281</b>	<b>105</b>	281	105	281	105	28	279	106	<b>279</b>	<b>106</b>	279	106
521.wrf_r	28	344	182	<b>344</b>	<b>183</b>	344	183	28	<b>341</b>	<b>184</b>	340	184	344	182
526.blender_r	28	293	146	<b>293</b>	<b>145</b>	294	145	28	293	145	<b>293</b>	<b>145</b>	294	145
527.cam4_r	28	323	151	<b>324</b>	<b>151</b>	324	151	28	299	164	<b>297</b>	<b>165</b>	297	165
538.imagick_r	28	<b>274</b>	<b>254</b>	274	255	275	253	28	274	254	273	255	<b>274</b>	<b>254</b>
544.nab_r	28	252	187	251	187	<b>252</b>	<b>187</b>	28	249	189	<b>249</b>	<b>189</b>	249	189
549.fotonik3d_r	28	<b>872</b>	<b>125</b>	872	125	873	125	28	872	125	<b>872</b>	<b>125</b>	873	125
554.roms_r	28	<b>491</b>	<b>90.6</b>	509	87.5	487	91.4	28	478	93.1	<b>475</b>	<b>93.6</b>	473	94.0
<b>SPECrate2017_fp_base = 156</b>														
<b>SPECrate2017_fp_peak = 159</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## General Notes (Continued)

Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

## Platform Notes

BIOS settings:  
Sub NUMA Cluster enabled  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Performance set to Maximum Performance  
C States set to Autonomous  
C1EE disabled  
Uncore Frequency set to Dynamic  
Energy Efficiency Policy set to Performance  
Memory Patrol Scrub disabled  
Logical Processor disabled  
CPU Interconnect Bus Link Power Management disabled  
PCI ASPM L1 Link Power Management disabled  
Sysinfo program /root/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-vfov Tue Feb 20 01:15:04 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz  
2 "physical id"s (chips)  
28 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following  
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 14  
siblings : 14  
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14  
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 28  
On-line CPU(s) list: 0-27  
Thread(s) per core: 1

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

Core(s) per socket: 14  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz  
Stepping: 4  
CPU MHz: 2593.889  
BogoMIPS: 5187.77  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 19712K  
NUMA node0 CPU(s): 0,4,8,12,16,20,24  
NUMA node1 CPU(s): 1,5,9,13,17,21,25  
NUMA node2 CPU(s): 2,6,10,14,18,22,26  
NUMA node3 CPU(s): 3,7,11,15,19,23,27  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch ida arat epb invpcid\_single pln pts dtherm intel\_pt rsb\_ctxsw spec\_ctrl retrpline kaiser tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavexc xgetbv1 cqm\_llc cqm\_occup\_llc pkru ospke

/proc/cpuinfo cache data  
cache size : 19712 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 4 8 12 16 20 24  
node 0 size: 46978 MB  
node 0 free: 46785 MB  
node 1 cpus: 1 5 9 13 17 21 25  
node 1 size: 48375 MB  
node 1 free: 48209 MB  
node 2 cpus: 2 6 10 14 18 22 26  
node 2 size: 48375 MB  
node 2 free: 48202 MB  
node 3 cpus: 3 7 11 15 19 23 27  
node 3 size: 48373 MB

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 3 free: 48182 MB
node distances:
node  0   1   2   3
 0: 10  21  11  21
 1: 21  10  21  11
 2: 11  21  10  21
 3: 21  11  21  10

From /proc/meminfo
  MemTotal:      196713400 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
  Linux linux-vfov 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Feb 19 19:43

SPEC is set to: /root/cpu2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda2        btrfs  928G   25G  902G   3%  /


Additional information from dmidecode follows.  WARNING: Use caution when you interpret
this section. The 'dmidecode' program reads system data which is "intended to allow
hardware to be accurately determined", but the intent may not be met, as there are
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

  BIOS Dell Inc. 1.3.7 02/09/2018
  Memory:
    6x 002C00B3002C 18ASF2G72PDZ-2G6D1 16 GB 2 rank 2666
    6x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 519.lbm_r(peak) 544.nab_r(peak)
-----
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(base) 510.parest_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 511.povray_r(base) 526.blender_r(base)
-----
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----

=====
CC 511.povray_r(peak) 526.blender_r(peak)
-----
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 554.roms\_r(peak)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)

=====

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Date: Feb-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

```
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

```
=====
CC 521.wrf_r(peak) 527.cam4_r(peak)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
-----
```

## Base Compiler Invocation

C benchmarks:

```
icc
```

C++ benchmarks:

```
icpc
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
ifort icc
```

Benchmarks using both C and C++:

```
icpc icc
```

Benchmarks using Fortran, C, and C++:

```
icpc icc ifort
```

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Base Portability Flags (Continued)

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

**SPECrate2017\_fp\_base = 156**

**SPECrate2017\_fp\_peak = 159**

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**Test Date:** Feb-2018

**Hardware Availability:** Sep-2017

**Software Availability:** Sep-2017

## Base Other Flags (Continued)

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Peak Optimization Flags (Continued)

519.lbm\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

538.imagick\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab\_r: Same as 519.lbm\_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves\_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte

549.fotonik3d\_r: Same as 503.bwaves\_r

554.roms\_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge C6420 (Intel Xeon Gold 6132,  
2.60 GHz)

SPECrate2017\_fp\_base = 156

SPECrate2017\_fp\_peak = 159

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Feb-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-02-20 02:15:03-0500.

Report generated on 2018-10-31 17:10:58 by CPU2017 PDF formatter v6067.

Originally published on 2018-03-20.