



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 187

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55


Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

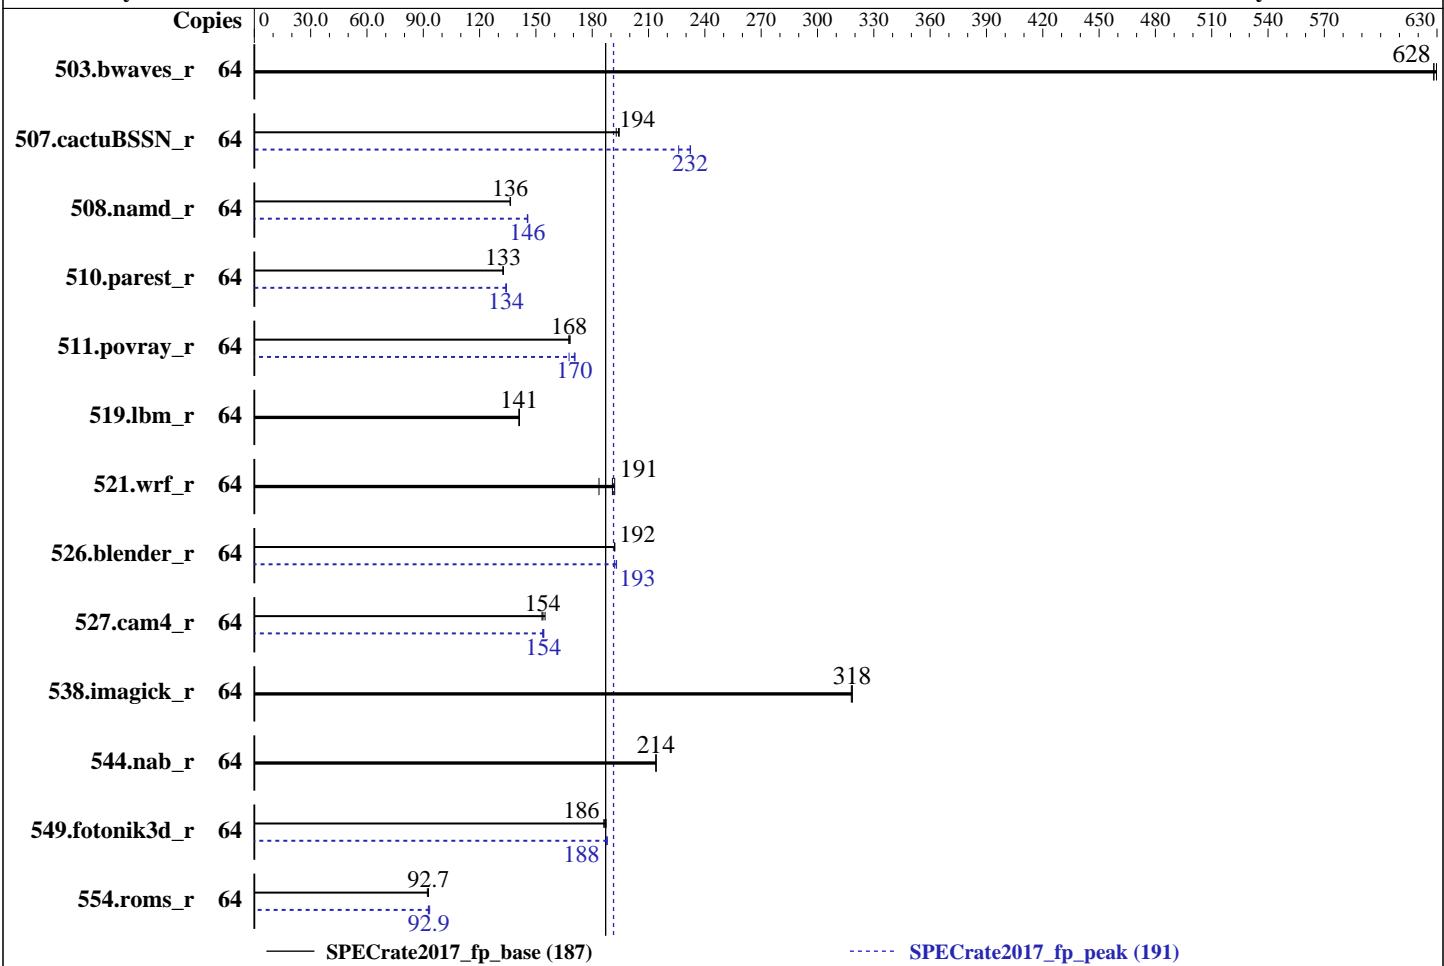

## Hardware

CPU Name: AMD EPYC 7281  
 Max MHz.: 2700  
 Nominal: 2100  
 Enabled: 32 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 32 MB I+D on chip per chip, 4 MB shared / 2 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2666V-L)  
 Storage: 1 x 120 GB SATA SSD  
 Other: None

## Software

OS: Ubuntu 18.04.2 LTS  
 Compiler: kernel 4.15.0-45-generic  
 4.15.0-45-generic  
 Parallel: C/C++: Version 1.3.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Firmware: No  
 File System: ext4  
 System State: Version 1.7.6 released Jan-2019  
 Base Pointers: Run level 5 (multi-user)  
 Peak Pointers: 64-bit  
 Other: jemalloc: jemalloc memory allocator library  
 V5.1.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECrate2017\_fp\_base = 187**

**SPECrate2017\_fp\_peak = 191**

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	64	1019	630	<b>1021</b>	<b>628</b>	1022	628	64	1019	630	<b>1021</b>	<b>628</b>	1022	628
507.cactuBSSN_r	64	420	193	417	194	<b>418</b>	<b>194</b>	64	349	232	358	226	<b>349</b>	<b>232</b>
508.namd_r	64	<b>446</b>	<b>136</b>	446	136	445	136	64	<b>418</b>	<b>146</b>	417	146	418	145
510.parest_r	64	1262	133	1264	132	<b>1263</b>	<b>133</b>	64	<b>1247</b>	<b>134</b>	1247	134	1250	134
511.povray_r	64	892	168	<b>891</b>	<b>168</b>	888	168	64	891	168	<b>877</b>	<b>170</b>	875	171
519.lbm_r	64	478	141	<b>478</b>	<b>141</b>	479	141	64	478	141	<b>478</b>	<b>141</b>	479	141
521.wrf_r	64	<b>752</b>	<b>191</b>	747	192	781	184	64	<b>752</b>	<b>191</b>	747	192	781	184
526.blender_r	64	<b>508</b>	<b>192</b>	508	192	508	192	64	508	192	<b>506</b>	<b>193</b>	505	193
527.cam4_r	64	723	155	<b>728</b>	<b>154</b>	730	153	64	726	154	729	154	<b>727</b>	<b>154</b>
538.imagick_r	64	<b>500</b>	<b>318</b>	500	319	501	318	64	<b>500</b>	<b>318</b>	500	319	501	318
544.nab_r	64	503	214	<b>503</b>	<b>214</b>	503	214	64	503	214	<b>503</b>	<b>214</b>	503	214
549.fotonik3d_r	64	1331	187	<b>1338</b>	<b>186</b>	1340	186	64	1330	188	<b>1328</b>	<b>188</b>	1326	188
554.roms_r	64	<b>1097</b>	<b>92.7</b>	1096	92.8	1103	92.2	64	1097	92.7	1089	93.4	<b>1095</b>	<b>92.9</b>
<b>SPECrate2017_fp_base = 187</b>														
<b>SPECrate2017_fp_peak = 191</b>														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here:  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 187

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Operating System Notes (Continued)

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5/amd1812na\_rate\_revA\_lib/64;/home/cpu2017-1.0.5/amd1812na\_rate\_revA\_lib/32;"

Binaries were compiled on a system with 2 x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc: sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:

narenas: sets the maximum number of arenas to use for automatic multiplexing of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,

lg\_chunk:21 sets the default chunk size to  $2^{21}$  = 2MiB

## Platform Notes

BIOS settings:

Determinism Slider set to Power Determinism

Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on r7425 Tue Mar 12 03:55:22 2019

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 187

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7281 16-Core Processor
  2 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings   : 32
  physical 0: cores 0 1 8 9 12 13 16 17 20 21 24 25 28 29
  physical 1: cores 0 1 8 9 12 13 16 17 20 21 24 25 28 29
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                64
On-line CPU(s) list:  0-63
Thread(s) per core:   2
Core(s) per socket:   16
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7281 16-Core Processor
Stepping:               2
CPU MHz:                2425.885
BogoMIPS:              4191.97
Virtualization:        AMD-V
L1d cache:              32K
L1i cache:              64K
L2 cache:                512K
L3 cache:                4096K
NUMA node0 CPU(s):    0,8,16,24,32,40,48,56
NUMA node1 CPU(s):    2,10,18,26,34,42,50,58
NUMA node2 CPU(s):    4,12,20,28,36,44,52,60
NUMA node3 CPU(s):    6,14,22,30,38,46,54,62
NUMA node4 CPU(s):    1,9,17,25,33,41,49,57
NUMA node5 CPU(s):    3,11,19,27,35,43,51,59
NUMA node6 CPU(s):    5,13,21,29,37,45,53,61
NUMA node7 CPU(s):    7,15,23,31,39,47,55,63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 187

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

```
constant_tsc rep_good nop1 nonstop_tsc cpuid extd_apicid amd_dcm aperfmpfperf pnpi
pclmulqdq monitor ssse3 fma cxl16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skininit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
hw_pstate sme ssbd ibpb vmmcall fsgsbase bmi1 avx2 smep bmi2 rdseed adx smap
clflushopt sha_ni xsaveopt xsavec xgetbv1 xsaves clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
```

```
available: 8 nodes (0-7)
node 0 cpus: 0 8 16 24 32 40 48 56
node 0 size: 128638 MB
node 0 free: 128438 MB
node 1 cpus: 2 10 18 26 34 42 50 58
node 1 size: 129020 MB
node 1 free: 128829 MB
node 2 cpus: 4 12 20 28 36 44 52 60
node 2 size: 129020 MB
node 2 free: 128851 MB
node 3 cpus: 6 14 22 30 38 46 54 62
node 3 size: 129020 MB
node 3 free: 128825 MB
node 4 cpus: 1 9 17 25 33 41 49 57
node 4 size: 129020 MB
node 4 free: 128859 MB
node 5 cpus: 3 11 19 27 35 43 51 59
node 5 size: 129020 MB
node 5 free: 128841 MB
node 6 cpus: 5 13 21 29 37 45 53 61
node 6 size: 128999 MB
node 6 free: 128830 MB
node 7 cpus: 7 15 23 31 39 47 55 63
node 7 size: 124986 MB
node 7 free: 124763 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 16 16 16 28 28 22 28
 1: 16 10 16 16 28 28 28 22
 2: 16 16 10 16 22 28 28 28
 3: 16 16 16 10 28 22 28 28
 4: 28 28 22 28 10 16 16 16
 5: 28 28 28 22 16 10 16 16
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 187

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

```
6: 22 28 28 28 16 16 10 16  
7: 28 22 28 28 16 16 16 10
```

From /proc/meminfo

```
MemTotal: 1052392340 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d  
Ubuntu 18.04.2 LTS
```

From /etc/\*release\* /etc/\*version\*

```
debian_version: buster/sid  
os-release:  
  NAME="Ubuntu"  
  VERSION="18.04.2 LTS (Bionic Beaver)"  
  ID=ubuntu  
  ID_LIKE=debian  
  PRETTY_NAME="Ubuntu 18.04.2 LTS"  
  VERSION_ID="18.04"  
  HOME_URL="https://www.ubuntu.com/"  
  SUPPORT_URL="https://help.ubuntu.com/"
```

uname -a:

```
Linux r7425 4.15.0-45-generic #48-Ubuntu SMP Tue Jan 29 16:28:13 UTC 2019 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected  
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline, IBPB
```

run-level 5 Mar 11 17:11

```
SPEC is set to: /home/cpu2017-1.0.5  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 ext4 109G 19G 85G 19% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.7.6 01/14/2019

Memory:

```
16x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666  
16x Not Specified Not Specified
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

SPECrate2017\_fp\_base = 187

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Platform Notes (Continued)

(End of data from sysinfo program)

### Compiler Version Notes

```
=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
    AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
-----

=====
CXXC 508.namd_r(base, peak) 510.parest_r(base, peak)
-----
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
    AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
-----

=====
CC 511.povray_r(base, peak) 526.blender_r(base, peak)
-----
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
    AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
-----

=====
FC 507.cactuBSSN_r(base, peak)
-----
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
    AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 187

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins

AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

---

=====

FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)

---

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

---

=====

CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

---

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.1.3.0.B34.2018\_10\_22 clang version 7.0.0 (CLANG: Jenkins

AOCC\_1\_3\_0\_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018\_10\_22)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

---



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 187

SPECrate2017\_fp\_peak = 191

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64  
526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64  
527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-fno -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lso-in-nested-loop  
-Wl,-plugin-opt=-enable-vectorize-compare=false -O3 -ffast-math  
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -inline-threshold=1000

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 187

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55

Test Date: Mar-2019

Test Sponsor: Dell Inc.

Hardware Availability: Jan-2019

Tested by: Dell Inc.

Software Availability: Feb-2019

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-flv-function-specialization -mllvm -enable-gvn-hoist  
-mllvm -function-specialize -z muldefs -lamdlibm -lpthread -ldl  
-ljemalloc
```

C++ benchmarks:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-Wl,-plugin-opt=-enable-vectorize-compare=false -O3 -march=znver1  
-mllvm -unroll-threshold=100 -finline-aggressive -fremap-arrays  
-mllvm -inline-threshold=1000 -mllvm -enable-vectorize-compare=false  
-z muldefs -lpthread -ldl -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-Wl,-plugin-opt=-enable-vectorize-compare=false -O3(gfortran)  
-O3(clang) -mavx -madx -funroll-loops -ffast-math -z muldefs  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compare=false  
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-Wl,-plugin-opt=-enable-vectorize-compare=false -O3(clang) -ffast-math  
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -enable-gvn-hoist  
-mllvm -function-specialize -O3(gfortran) -mavx -madx -funroll-loops  
-z muldefs -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compare=false  
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop  
-Wl,-plugin-opt=-enable-vectorize-compare=false -O3 -ffast-math  
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -inline-threshold=1000  
-flv-function-specialization -mllvm -enable-gvn-hoist  
-mllvm -function-specialize -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -enable-vectorize-compare=false -z muldefs  
-lpthread -ldl -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

SPECrate2017\_fp\_base = 187

SPECrate2017\_fp\_peak = 191

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lso-in-nested-loop  
-Wl,-plugin-opt=-enable-vectorize-compare=false -O3(clang) -ffast-math  
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50  
-fremap-arrays -mllvm -inline-threshold=1000  
-fiv-function-specialization -mllvm -enable-gvn-hoist  
-mllvm -function-specialize -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -enable-vectorize-compare=false  
-O3(gfortran) -mavx -madx -funroll-loops -z muldefs  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compare=false  
-lpthread -ldl -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 187

SPECrate2017\_fp\_peak = 191

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -lpthread -ldl -ljemalloc
```

Fortran benchmarks:

503.bwaves\_r: basepeak = yes

```
549.fotonik3d_r: -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3(gfortran)  
-O3(clang) -mavx2 -madx -funroll-loops -ffast-math  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000  
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

554.roms\_r: Same as 549.fotonik3d\_r

Benchmarks using both Fortran and C:

521.wrf\_r: basepeak = yes

```
527.cam4_r: -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -O3(gfortran) -O3(clang)  
-mavx2 -madx -funroll-loops -ffast-math  
-fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000  
-lpthread -ldl -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7425 (AMD EPYC 7281, 2.10GHz)

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate2017\_fp\_base = 187

SPECrate2017\_fp\_peak = 191

Test Date: Mar-2019

Hardware Availability: Jan-2019

Software Availability: Feb-2019

## Peak Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):

```
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -finline-aggressive -lpthread -ldl  
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -finline-aggressive -O3 -mavx2 -madx  
-funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -lpthread  
-ldl -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>  
<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>  
<http://www.spec.org/cpu2017/flags/aocc130-flags-revA2.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2019-03-11 23:55:21-0400.

Report generated on 2019-04-02 16:55:08 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-02.