



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed2017_fp_base = 125

H3C UniServer R4900 G3 (Intel Xeon Gold 6150)

SPECSpeed2017_fp_peak = 126

CPU2017 License: 9066


Test Date: Apr-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2018

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2019

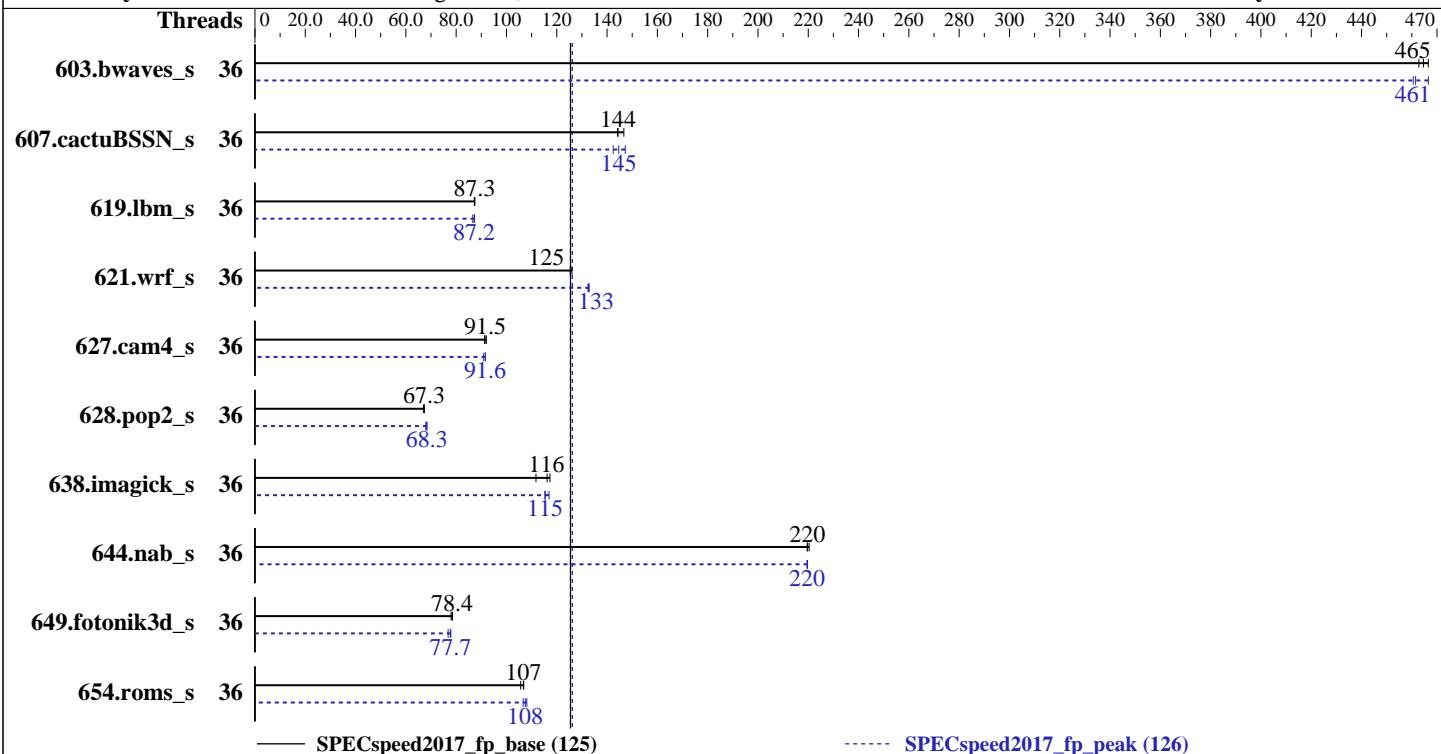

— SPECSpeed2017_fp_base (125)

----- SPECSpeed2017_fp_peak (126)

Hardware

CPU Name: Intel Xeon Gold 6150
 Max MHz.: 3700
 Nominal: 2700
 Enabled: 36 cores, 2 chips
 Orderable: 1,2 Chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 24.75 MB I+D on chip per chip
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 1 x 1 TB 7200RPM SATA HDD
 Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.5 (Maipo)
 Compiler: C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux
 Parallel: Yes
 Firmware: Version 2.00.24 released Mar-2019 BIOS
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G3 (Intel Xeon Gold 6150)

SPECSpeed2017_fp_base = 125

SPECSpeed2017_fp_peak = 126

CPU2017 License: 9066

Test Date: Apr-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2018

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	36	126	467	127	463	<u>127</u>	<u>465</u>	36	<u>128</u>	<u>461</u>	126	467	128	461
607.cactuBSSN_s	36	116	144	<u>115</u>	<u>144</u>	114	147	36	117	142	<u>115</u>	<u>145</u>	113	147
619.lbm_s	36	60.0	87.3	59.9	87.4	60.0	87.2	36	60.1	87.2	60.0	87.3	60.5	86.6
621.wrf_s	36	105	125	105	126	<u>105</u>	<u>125</u>	36	<u>99.7</u>	<u>133</u>	99.5	133	99.9	132
627.cam4_s	36	96.3	92.0	<u>96.9</u>	<u>91.5</u>	97.1	91.3	36	<u>96.8</u>	<u>91.6</u>	97.4	91.0	<u>96.7</u>	<u>91.7</u>
628.pop2_s	36	176	67.3	177	67.0	<u>176</u>	<u>67.3</u>	36	<u>174</u>	<u>68.3</u>	175	67.9	174	68.4
638.imagick_s	36	<u>124</u>	<u>116</u>	129	112	123	117	36	123	117	<u>125</u>	<u>115</u>	125	115
644.nab_s	36	79.6	220	79.3	220	<u>79.5</u>	<u>220</u>	36	79.5	220	<u>79.6</u>	<u>220</u>	79.6	220
649.fotonik3d_s	36	117	78.0	<u>116</u>	<u>78.4</u>	116	78.6	36	<u>117</u>	<u>77.7</u>	117	77.9	119	76.8
654.roms_s	36	149	106	<u>148</u>	<u>107</u>	147	107	36	146	108	<u>146</u>	<u>108</u>	148	107
SPECSpeed2017_fp_base = 125							SPECSpeed2017_fp_peak = 126							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/home/speccpu/lib/ia32:/home/speccpu/lib/intel64"

OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Settings:

Set SNC to Disabled

Set Hyper-Threading to Disabled

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed2017_fp_base = 125

H3C UniServer R4900 G3 (Intel Xeon Gold 6150)

SPECSpeed2017_fp_peak = 126

CPU2017 License: 9066

Test Date: Apr-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2018

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2019

Platform Notes (Continued)

Set Autonomous Core C-State to Enabled

Set Stale Atos to Enabled

Set LLC Deadline Alloc to Disabled

Set Intel VT for Directed I/O (VT-d) to Disabled

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on localhost.localdomain Mon Apr 1 21:06:31 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz
  2 "physical id"s (chips)
  36 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 18
  siblings   : 18
  physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
  physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                36
On-line CPU(s) list:  0-35
Thread(s) per core:   1
Core(s) per socket:   18
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6150 CPU @ 2.70GHz
Stepping:               4
CPU MHz:                1200.036
CPU max MHz:            3700.0000
CPU min MHz:            1200.0000
BogoMIPS:                5400.00
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                25344K
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed2017_fp_base = 125

H3C UniServer R4900 G3 (Intel Xeon Gold 6150)

SPECSpeed2017_fp_peak = 126

CPU2017 License: 9066

Test Date: Apr-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2018

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2019

Platform Notes (Continued)

```
NUMA node0 CPU(s):      0-17
NUMA node1 CPU(s):      18-35
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_13 cdp_13 intel_pt ssbd mba
ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle
avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt_a avx512f avx512dq rdseed adx smap
clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc
cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local dtherm ida arat pln pts hwp hwp_act_window
hwp_epp hwp_pkg_req pku ospke spec_ctrl intel_stibp flush_ll1d
```

```
/proc/cpuinfo cache data
cache size : 25344 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17
node 0 size: 195224 MB
node 0 free: 181905 MB
node 1 cpus: 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35
node 1 size: 196608 MB
node 1 free: 187082 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10
```

```
From /proc/meminfo
```

```
MemTotal:       394623728 kB
HugePages_Total:        0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
```

```
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.5 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.5"
PRETTY_NAME="OpenShift Enterprise"
redhat-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed2017_fp_base = 125

H3C UniServer R4900 G3 (Intel Xeon Gold 6150)

SPECSpeed2017_fp_peak = 126

CPU2017 License: 9066

Test Date: Apr-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2018

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2019

Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.5 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.5:ga:server
```

```
uname -a:
```

```
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI
```

```
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
```

```
CVE-2017-5715 (Spectre variant 2): Mitigation: IBRS (kernel)
```

```
run-level 3 Apr 1 16:17
```

```
SPEC is set to: /home/speccpu
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	xfs	293G	14G	280G	5%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS American Megatrends Inc. 2.00.24 03/08/2019
```

```
Memory:
```

```
12x Micron 36ASF4G72PZ-2G6D1 32 GB 2 rank 2666
```

```
12x NO DIMM NO DIMM
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

```
=====
FC 607.cactuBSSN_s(base, peak)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed2017_fp_base = 125

H3C UniServer R4900 G3 (Intel Xeon Gold 6150)

SPECSpeed2017_fp_peak = 126

CPU2017 License: 9066

Test Date: Apr-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2018

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2019

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base, peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 603.bwaves_s(peak) 649.fotonik3d_s(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 621.wrf_s(peak) 628.pop2_s(peak)

=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.1.144 Build 20181018

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.	SPECSpeed2017_fp_base = 125
H3C UniServer R4900 G3 (Intel Xeon Gold 6150)	SPECSpeed2017_fp_peak = 126
CPU2017 License: 9066	Test Date: Apr-2019
Test Sponsor: New H3C Technologies Co., Ltd.	Hardware Availability: Dec-2018
Tested by: New H3C Technologies Co., Ltd.	Software Availability: Mar-2019

Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

H3C UniServer R4900 G3 (Intel Xeon Gold 6150)

SPECSPEED2017_fp_base = 125

SPECSPEED2017_fp_peak = 126

CPU2017 License: 9066

Test Sponsor: New H3C Technologies Co., Ltd.

Tested by: New H3C Technologies Co., Ltd.

Test Date: Apr-2019

Hardware Availability: Dec-2018

Software Availability: Mar-2019

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
603.bwaves_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP  
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs
```

649.fotonik3d_s: Same as 603.bwaves_s

```
654.roms_s: -DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECSpeed2017_fp_base = 125

H3C UniServer R4900 G3 (Intel Xeon Gold 6150)

SPECSpeed2017_fp_peak = 126

CPU2017 License: 9066

Test Date: Apr-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Dec-2018

Tested by: New H3C Technologies Co., Ltd.

Software Availability: Mar-2019

Peak Optimization Flags (Continued)

654.roms_s (continued):

-fopenmp -nostandard-realloc-lhs

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -fopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevC.html
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevC.xml
<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-04-01 09:06:30-0400.

Report generated on 2019-04-16 17:20:22 by CPU2017 PDF formatter v6067.

Originally published on 2019-04-16.