



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V2
(2.20 GHz, Intel Xeon Gold 5320)

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jul-2021

Hardware Availability: Jul-2021

Software Availability: Dec-2020

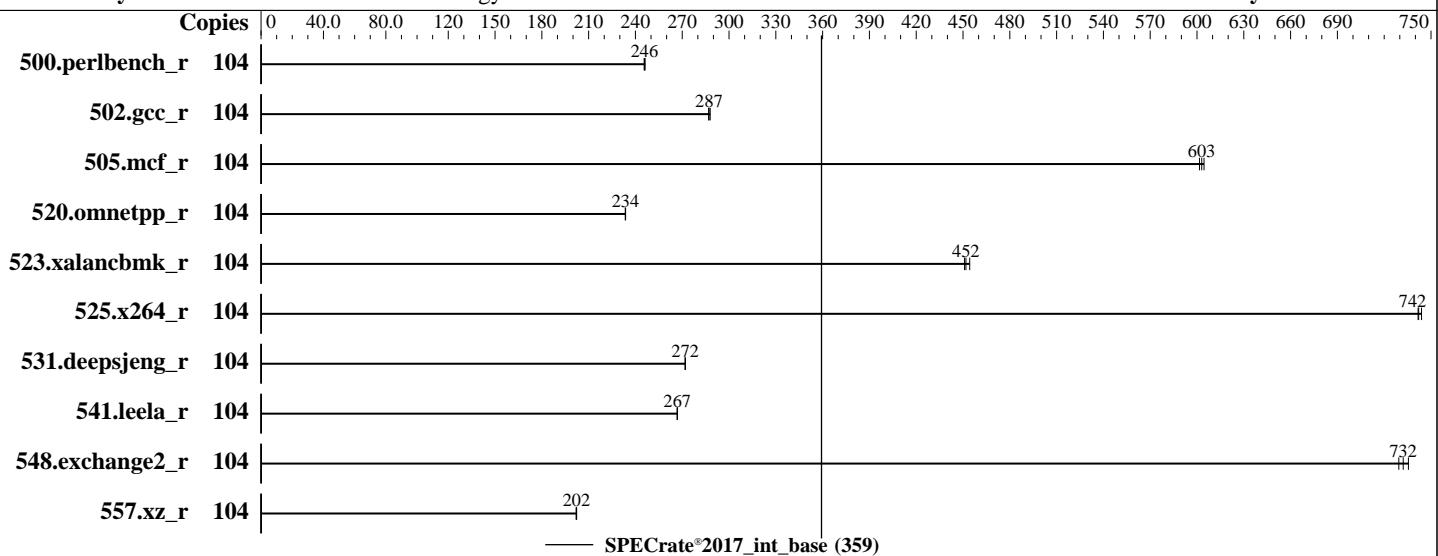

Hardware

CPU Name: Intel Xeon Gold 5320
Max MHz: 3400
Nominal: 2200
Enabled: 52 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 39 MB I+D on chip per chip
Other: None
Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R, running at 2933)
Storage: 1 x 960 GB SATA SSD
Other: None

OS:

Red Hat Enterprise Linux 8.3
(Ootpa)

Compiler:

Kernel 4.18.0-240.el8.x86_64
C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler
Classic Build 20201112 for Linux

Parallel:

No

Firmware:

Lenovo BIOS Version AFE111A 1.02 released May-2021

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

Not Applicable

Other:

None

Power Management:

BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V2
(2.20 GHz, Intel Xeon Gold 5320)

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	104	674	246	674	246	672	246							
502.gcc_r	104	513	287	513	287	511	288							
505.mcf_r	104	279	602	278	605	279	603							
520.omnetpp_r	104	584	234	584	233	584	234							
523.xalancbmk_r	104	243	452	242	454	244	451							
525.x264_r	104	245	744	246	742	245	742							
531.deepsjeng_r	104	438	272	438	272	438	272							
541.leela_r	104	646	267	645	267	645	267							
548.exchange2_r	104	370	736	372	732	374	729							
557.xz_r	104	555	202	555	202	556	202							

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/cpu2017-1.1.8-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.8-ic202
    1.1-revB/lib/ia32:/home/cpu2017-1.1.8-ic2021.1-revB/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V2
(2.20 GHz, Intel Xeon Gold 5320)

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

General Notes (Continued)

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C-States set to Legacy

Adjacent Cache Prefetch set to Disabled

DCU Streamer Prefetcher set to Disabled

SNC set to Enabled

Sysinfo program /home/cpu2017-1.1.8-ic2021.1-revB/bin/sysinfo
Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d
running on localhost.localdomain Wed Jul 21 22:11:29 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5320 CPU @ 2.20GHz
2 "physical id"s (chips)
104 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 26
siblings : 52
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25

From lscpu from util-linux 2.32.1:

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 104
On-line CPU(s) list: 0-103
Thread(s) per core: 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V2
(2.20 GHz, Intel Xeon Gold 5320)

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

Platform Notes (Continued)

Core(s) per socket: 26
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 5320 CPU @ 2.20GHz
Stepping: 6
CPU MHz: 2989.184
BogoMIPS: 4400.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 39936K
NUMA node0 CPU(s): 0-12,52-64
NUMA node1 CPU(s): 13-25,65-77
NUMA node2 CPU(s): 26-38,78-90
NUMA node3 CPU(s): 39-51,91-103
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnnowprefetch cpuid_fault epb cat_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsavveopt xsavvec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_ll1d arch_capabilities

/proc/cpuinfo cache data
cache size : 39936 KB

From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 52 53 54 55 56 57 58 59 60 61 62 63 64
node 0 size: 251902 MB
node 0 free: 257311 MB
node 1 cpus: 13 14 15 16 17 18 19 20 21 22 23 24 25 65 66 67 68 69 70 71 72 73 74 75 76 77
node 1 size: 252291 MB
node 1 free: 257552 MB
node 2 cpus: 26 27 28 29 30 31 32 33 34 35 36 37 38 78 79 80 81 82 83 84 85 86 87 88 89

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V2
(2.20 GHz, Intel Xeon Gold 5320)

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

Platform Notes (Continued)

```
90
node 2 size: 252123 MB
node 2 free: 257600 MB
node 3 cpus: 39 40 41 42 43 44 45 46 47 48 49 50 51 91 92 93 94 95 96 97 98 99 100 101
102 103
node 3 size: 251999 MB
node 3 free: 257707 MB
node distances:
node   0   1   2   3
  0: 10  11  20  20
  1: 11  10  20  20
  2: 20  20  10  11
  3: 20  20  11  10

From /proc/meminfo
MemTotal:           1056479576 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

/sbin/tuned-adm active
  Current active profile: balanced

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux release 8.3 (Ootpa)

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
  Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
  x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V2
(2.20 GHz, Intel Xeon Gold 5320)

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

Platform Notes (Continued)

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort):

Not affected

run-level 3 Jul 21 22:10

SPEC is set to: /home/cpu2017-1.1.8-ic2021.1-revB

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	818G	160G	658G	20%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Lenovo
Product:	ThinkSystem SR650 V2 MB
Product Family:	ThinkSystem
Serial:	1234567890

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

32x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200, configured at 2933

BIOS:

BIOS Vendor:	Lenovo
BIOS Version:	AFE111A-1.02
BIOS Date:	05/07/2021
BIOS Revision:	1.2
Firmware Revision:	1.10

(End of data from sysinfo program)

Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V2
(2.20 GHz, Intel Xeon Gold 5320)

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
| 541.leela_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 548.exchange2_r(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V2
(2.20 GHz, Intel Xeon Gold 5320)

SPECrate®2017_int_base = 359

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jul-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Dec-2020

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-ICELake-F.html>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECCpu2017-Flags-V1.2-ICELake-F.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-07-21 10:11:29-0400.

Report generated on 2021-08-19 10:53:49 by CPU2017 PDF formatter v6442.

Originally published on 2021-08-17.