SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280A6 (AMD EPYC 7443)

SPECrate®2017_fp_base = 408

SPECrate®2017_fp_peak = 428

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: May-2022
Hardware Availability: Sep-2022
Software Availability: Dec-2021

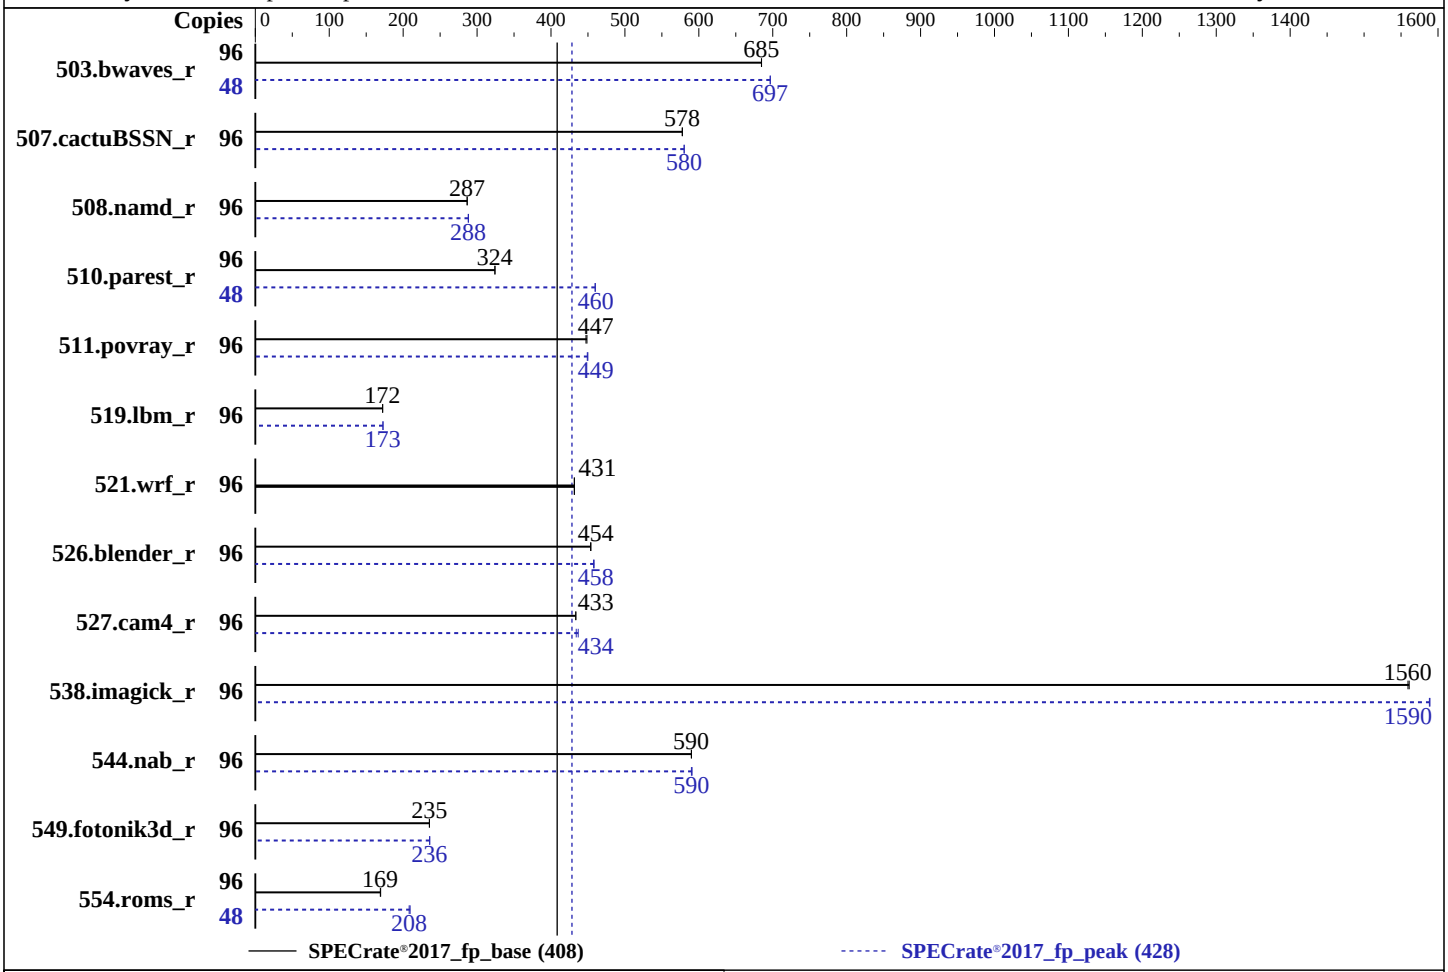

Hardware

CPU Name:	AMD EPYC 7443
Max MHz:	4000
Nominal:	2850
Enabled:	48 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	128 MB I+D on chip per chip, 32 MB shared / 6 cores
Other:	None
Memory:	1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software

OS:	Red Hat Enterprise Linux release 8.5 (Ootpa) 4.18.0-348.el8.x86_64
Compiler:	C/C++/Fortran: Version 3.2.0 of AOCC
Parallel:	No
Firmware:	Version 7.00.04 released May-2022
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Inspur Corporation

Inspur NF5280A6 (AMD EPYC 7443)

SPECrate®2017_fp_base = 408

SPECrate®2017_fp_peak = 428

CPU2017 License: 3358
Test Sponsor: Inspur Corporation
Tested by: Inspur Corporation

Test Date: May-2022
Hardware Availability: Sep-2022
Software Availability: Dec-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	**1406**	**685**	1406	685			48	**691**	**697**	691	697		
507.cactuBSSN_r	96	210	578	**210**	**578**			96	**210**	**580**	209	580		
508.namd_r	96	318	287	**318**	**287**			96	316	288	**317**	**288**		
510.parest_r	96	**775**	**324**	774	324			48	**273**	**460**	273	460		
511.povray_r	96	500	449	**501**	**447**			96	498	450	**499**	**449**		
519.lbm_r	96	587	172	**588**	**172**			96	**586**	**173**	586	173		
521.wrf_r	96	**498**	**431**	498	432			96	**498**	**431**	498	432		
526.blender_r	96	322	454	**322**	**454**			96	**320**	**458**	319	458		
527.cam4_r	96	**387**	**433**	387	434			96	**387**	**434**	384	437		
538.imagick_r	96	153	1560	**153**	**1560**			96	150	1590	**150**	**1590**		
544.nab_r	96	274	590	**274**	**590**			96	273	591	**274**	**590**		
549.fotonik3d_r	96	1588	236	**1589**	**235**			96	**1587**	**236**	1585	236		
554.roms_r	96	**902**	**169**	900	170			48	**366**	**208**	364	209		

SPECrate®2017_fp_base = 408

SPECrate®2017_fp_peak = 428

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_rate_aocc320_milanx_A_lib/lib;/home/cpu2017/amd_rate_
     aocc320_milanx_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)
jemalloc 5.1.0 is available here:
https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2
```

Platform Notes

```
 BIOS and OS configuration:
 SVM Mode = disable
 DRAM Scrub time = disable
 NUMA nodes per socket = NPS4
 APBDIS = 1
 Scaling_Governor set to Performance

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafc64d
```

(Continued on next page)

Platform Notes (Continued)

```
running on localhost.localdomain Mon May 30 20:24:49 2022

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
   https://www.spec.org/cpu2017/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : AMD EPYC 7443 24-Core Processor
      2  "physical id"s (chips)
      96 "processors"
   cores, siblings (Caution: counting these is hw and system dependent. The following
   excerpts from /proc/cpuinfo might not be reliable.  Use with caution.)
      cpu cores : 24
      siblings  : 48
      physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
      physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu from util-linux 2.32.1:
     Architecture:        x86_64
     CPU op-mode(s):      32-bit, 64-bit
     Byte Order:          Little Endian
     CPU(s):              96
     On-line CPU(s) list: 0-95
     Thread(s) per core:  2
     Core(s) per socket:  24
     Socket(s):           2
     NUMA node(s):        8
     Vendor ID:           AuthenticAMD
     BIOS Vendor ID:      Advanced Micro Devices, Inc.
     CPU family:          25
     Model:               1
     Model name:          AMD EPYC 7443 24-Core Processor
     BIOS Model name:     AMD EPYC 7443 24-Core Processor
     Stepping:            1
     CPU MHz:             2850.000
     CPU max MHz:         4035.6440
     CPU min MHz:         1500.0000
     BogoMIPS:            5689.47
     Virtualization:      AMD-V
     L1d cache:           32K
     L1i cache:           32K
     L2 cache:            512K
     L3 cache:            32768K
     NUMA node0 CPU(s):   0-5,48-53
     NUMA node1 CPU(s):   6-11,54-59
     NUMA node2 CPU(s):   12-17,60-65
     NUMA node3 CPU(s):   18-23,66-71
```

(Continued on next page)

Platform Notes (Continued)

```
      NUMA node4 CPU(s):   24-29,72-77
      NUMA node5 CPU(s):   30-35,78-83
      NUMA node6 CPU(s):   36-41,84-89
      NUMA node7 CPU(s):   42-47,90-95
      Flags:               fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
      monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand
      lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
      ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
      cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
      bmi1 avx2 smep bmi2 invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
      clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save
      tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold
      v_vmsave_vmload vgif v_spec_ctrl umip pku ospke vaes vpclmulqdq rdpid overflow_recov
      succor smca sme sev sev_es

 /proc/cpuinfo cache data
    cache size : 512 KB

 From numactl --hardware
 WARNING: a numactl 'node' might or might not correspond to a physical chip.
   available: 8 nodes (0-7)
   node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53
   node 0 size: 128834 MB
   node 0 free: 128548 MB
   node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59
   node 1 size: 129020 MB
   node 1 free: 128782 MB
   node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65
   node 2 size: 128983 MB
   node 2 free: 128787 MB
   node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71
   node 3 size: 129008 MB
   node 3 free: 128673 MB
   node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77
   node 4 size: 129020 MB
   node 4 free: 128799 MB
   node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83
   node 5 size: 129020 MB
   node 5 free: 128819 MB
   node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89
   node 6 size: 129020 MB
   node 6 free: 128810 MB
   node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95
   node 7 size: 129020 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 7 free: 128799 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

From /proc/meminfo
   MemTotal:       1056696432 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/sbin/tuned-adm active
    Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
   performance

From /etc/*release* /etc/*version*
   os-release:
      NAME="Red Hat Enterprise Linux"
      VERSION="8.5 (Ootpa)"
      ID="rhel"
      ID_LIKE="fedora"
      VERSION_ID="8.5"
      PLATFORM_ID="platform:el8"
      PRETTY_NAME="Red Hat Enterprise Linux 8.5 (Ootpa)"
      ANSI_COLOR="0;31"
   redhat-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
   system-release: Red Hat Enterprise Linux release 8.5 (Ootpa)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:8::baseos

uname -a:
   Linux localhost.localdomain 4.18.0-348.el8.x86_64 #1 SMP Mon Oct 4 12:17:22 EDT 2021
   x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):                        Not affected
CVE-2018-3620 (L1 Terminal Fault):                     Not affected
Microarchitectural Data Sampling:                      Not affected
CVE-2017-5754 (Meltdown):                              Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
 CVE-2018-3639 (Speculative Store Bypass):             Mitigation: Speculative Store
                                                       Bypass disabled via prctl and
                                                       seccomp
 CVE-2017-5753 (Spectre variant 1):                    Mitigation: usercopy/swapgs
                                                       barriers and __user pointer
                                                       sanitization
 CVE-2017-5715 (Spectre variant 2):                    Mitigation: Full AMD retpoline,
                                                     IBPB: conditional, IBRS_FW, STIBP:
                                                       always-on, RSB filling
 CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected
 CVE-2019-11135 (TSX Asynchronous Abort):              Not affected

 run-level 3 May 30 15:50

 SPEC is set to: /home/cpu2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   372G   70G  302G  19% /home

 From /sys/devices/virtual/dmi/id
     Vendor:         Inspur
     Product:        NF5280A6
     Product Family: Not specified
     Serial:         200857231

 Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you
 interpret this section. The 'dmidecode' program reads system data which is "intended to
 allow hardware to be accurately determined", but the intent may not be met, as there are
 frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.
   Memory:
     32x Samsung M393A4K40EB3-CWE 32 GB 2 rank 3200

 BIOS:
    BIOS Vendor:       American Megatrends Inc.
    BIOS Version:      7.00.04
    BIOS Date:         05/19/2022

 (End of data from sysinfo program)
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
AMD clang version 13.0.0 (CLANG: AOCC_3.2.0-Build#128 2021_11_12) (based on
  LLVM Mirror.Version.13.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.2.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

(Continued on next page)

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

C++ benchmarks:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -mllvm -enable-partial-unswitch

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-mllvm -enable-loop-fusion -z muldefs -lamdlibm -ljemalloc -lflang

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -Hz,1,0x1 -O3 -march=znver3
-fveclib=AMDLIBM -ffast-math -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-loop-fusion
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang

Benchmarks using both C and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -z muldefs -lamdlibm -ljemalloc
-lflang

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-loop-fusion -O3 -march=znver3 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=5 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays
-mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -enable-loop-fusion -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Hz,1,0x1 -Kieee -Mrecursive
-mllvm -fuse-tile-inner-loop -funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -enable-loopinterchange -mllvm -compute-interchange-order
-z muldefs -lamdlibm -ljemalloc -lflang

Base Other Flags

C benchmarks:
-Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

(Continued on next page)

Base Other Flags (Continued)

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both Fortran and C:
`flang clang`

Benchmarks using both C and C++:
`clang++ clang`

Benchmarks using Fortran, C, and C++:
`clang++ clang flang`

Peak Portability Flags

`Same as Base Portability Flags`

Peak Optimization Flags

C benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

519.lbm_r: -m64 -flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

538.imagick_r: Same as 519.lbm_r

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc

C++ benchmarks:

508.namd_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math
-finline-aggressive -mllvm -unroll-threshold=100
-flv-function-specialization -mllvm -enable-licm-vrp
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc

510.parest_r: -m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch

(Continued on next page)

Peak Optimization Flags (Continued)

510.parest_r (continued):
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -lamdlibm -ljemalloc

Fortran benchmarks:

503.bwaves_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Kieee
-Mrecursive -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-lamdlibm -ljemalloc -lflang

554.roms_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp
-Hz,1,0x1 -mllvm -fuse-tile-inner-loop -lamdlibm
-ljemalloc -lflang

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -m64 -Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-force-vector-interleave=1 -Ofast
-march=znver3 -fveclib=AMDLIBM -ffast-math

(Continued on next page)

Peak Optimization Flags (Continued)

527.cam4_r (continued):
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -O3 -funroll-loops
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
-Mrecursive -Hz,1,0x1 -mllvm -enable-loopinterchange
-mllvm -compute-interchange-order -lamdlibm -ljemalloc
-lflang

Benchmarks using both C and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -lamdlibm -ljemalloc

Benchmarks using Fortran, C, and C++:
-m64 -std=c++98 -mno-adx -mno-sse4a
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist
-mllvm -global-vectorize-slp=true -mllvm -function-specialize
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-finline-aggressive -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch -mllvm -extra-vectorizer-passes
-mllvm -convert-pow-exp-to-int=false -Mrecursive -lamdlibm -ljemalloc
-lflang

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.html`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V1.3.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc320-flags-A1.xml`
`http://www.spec.org/cpu2017/flags/Inspur-Platform-Settings-amd-V1.3.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-05-30 20:24:48-0400.
Report generated on 2022-06-21 17:29:23 by CPU2017 PS formatter v6442.
Originally published on 2022-06-21.