



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECSpeed®2017_fp_base = 139

SPECSpeed®2017_fp_peak = 139

CPU2017 License: 3


Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

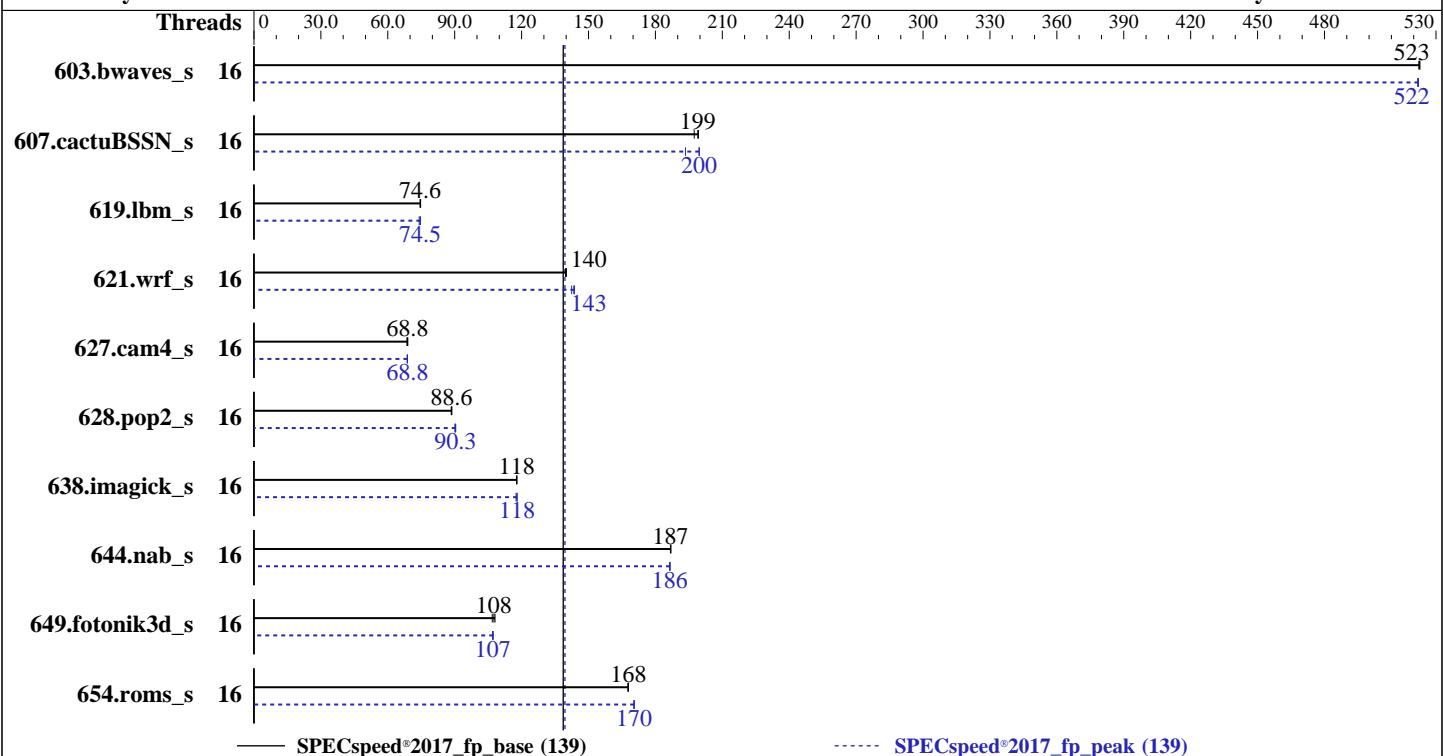

— SPECSpeed®2017_fp_base (139)

----- SPECSpeed®2017_fp_peak (139)

Hardware

CPU Name: AMD EPYC 9124
 Max MHz: 3700
 Nominal: 3000
 Enabled: 16 cores, 1 chip
 Orderable: 1 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 64 MB I+D on chip per chip,
 16 MB shared / 4 cores
 Other: None
 Memory: 384 GB (12 x 32 GB 2Rx8 PC5-4800B-R)
 Storage: 1 x 1.6 TB NVMe SSD, RAID 0
 Other: None

Software

OS: Ubuntu 22.04.1 LTS
 Compiler: Kernel 5.15.0-53-generic
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
 Firmware: Yes
 File System: HPE BIOS Version v1.12 11/24/2022 released
 System State: Nov-2022
 Base Pointers: ext4
 Peak Pointers: Run level 5 (multi-user)
 Other: 64-bit
 Power Management: Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at
 the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	16	113	522	<u>113</u>	<u>523</u>	113	523	16	113	522	113	522	<u>113</u>	<u>522</u>
607.cactuBSSN_s	16	84.4	197	83.6	199	<u>83.8</u>	<u>199</u>	16	83.5	200	<u>83.5</u>	<u>200</u>	86.2	193
619.lbm_s	16	70.2	74.6	70.3	74.5	70.1	74.7	16	70.3	74.5	70.7	74.1	70.2	74.6
621.wrf_s	16	94.7	140	<u>94.5</u>	<u>140</u>	94.4	140	16	<u>92.2</u>	<u>143</u>	92.9	142	92.0	144
627.cam4_s	16	<u>129</u>	<u>68.8</u>	128	69.0	129	68.6	16	129	68.7	129	68.8	<u>129</u>	<u>68.8</u>
628.pop2_s	16	<u>134</u>	<u>88.6</u>	134	88.7	134	88.4	16	132	90.1	131	90.5	<u>131</u>	<u>90.3</u>
638.imagick_s	16	122	118	<u>122</u>	<u>118</u>	122	118	16	<u>122</u>	<u>118</u>	123	118	122	118
644.nab_s	16	<u>93.5</u>	<u>187</u>	93.6	187	93.5	187	16	93.7	186	93.7	187	<u>93.7</u>	<u>186</u>
649.fotonik3d_s	16	<u>84.7</u>	<u>108</u>	84.3	108	85.3	107	16	<u>85.2</u>	<u>107</u>	85.0	107	85.2	107
654.roms_s	16	93.9	168	93.8	168	<u>93.8</u>	<u>168</u>	16	92.4	170	92.4	170	<u>92.4</u>	<u>170</u>

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Operating System Notes (Continued)

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.

To always enable THP for peak runs of:

603.bwaves_s, 607.cactubSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

To disable THP for peak runs of 621.wrf_s:

'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

To enable THP only on request for peak runs of 654.roms_s:

'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'
run as root.

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

GOMP_CPU_AFFINITY = "0-15"
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_genoa_B_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "16"

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 607.cactubSSN_s peak run:
GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 638.imagick_s peak run:
GOMP_CPU_AFFINITY = "0-15"

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Environment Variables Notes (Continued)

Environment variables set by runcpu during the 644.nab_s peak run:

GOMP_CPU_AFFINITY = "0-15"

Environment variables set by runcpu during the 649.fotonik3d_s peak run:

GOMP_CPU_AFFINITY = "0-15"

PGHPF_ZMEM = "yes"

Environment variables set by runcpu during the 654.roms_s peak run:

GOMP_CPU_AFFINITY = "0 8 1 9 2 10 3 11 4 12 5 13 6 14 7 15"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Memory PStates set to Disabled

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The system ROM used for this result contains microcode version 0x0A10110e for the AMD EPYC 9nn4X family of processors. The reference code/AGESA version used in this ROM is version GenoAPI 1.0.0.1-L6

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d

running on admin1 Mon Jun 27 18:32:48 2022

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11
(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 9124 16-Core Processor
  1 "physical id"s (chips)
  16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 16
  siblings   : 16
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu from util-linux 2.37.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	52 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	16
On-line CPU(s) list:	0-15
Vendor ID:	AuthenticAMD
Model name:	AMD EPYC 9124 16-Core Processor
CPU family:	25
Model:	17
Thread(s) per core:	1
Core(s) per socket:	16
Socket(s):	1
Stepping:	1
Frequency boost:	enabled
CPU max MHz:	3713.0000
CPU min MHz:	400.0000
BogoMIPS:	5990.87
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl pnpi pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osrw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwtx cpb cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occu_llc cqmq_mbm_total cqmq_mbm_local avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Date: Dec-2022

Test Sponsor: HPE

Hardware Availability: Dec-2022

Tested by: HPE

Software Availability: Nov-2022

Platform Notes (Continued)

```
la57 rdpid overflow_recov succor smca fsrm flush_l1d
Virtualization: AMD-V
L1d cache: 512 KiB (16 instances)
L1i cache: 512 KiB (16 instances)
L2 cache: 16 MiB (16 instances)
L3 cache: 64 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-3
NUMA node1 CPU(s): 8-11
NUMA node2 CPU(s): 12-15
NUMA node3 CPU(s): 4-7
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	512K	8	Data	1	64	1	64
L1i	32K	512K	8	Instruction	1	64	1	64
L2	1M	16M	8	Unified	2	2048	1	64
L3	16M	64M	16	Unified	3	16384	1	64

```
/proc/cpuinfo cache data
cache size : 1024 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3
node 0 size: 96456 MB
node 0 free: 96164 MB
node 1 cpus: 8 9 10 11
node 1 size: 96766 MB
node 1 free: 96467 MB
node 2 cpus: 12 13 14 15
node 2 size: 96693 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

```
node 2 free: 96340 MB
node 3 cpus: 4 5 6 7
node 3 size: 96766 MB
node 3 free: 96507 MB
node distances:
node   0   1   2   3
 0: 10 11 11 11
 1: 11 10 11 11
 2: 11 11 10 11
 3: 11 11 11 10

From /proc/meminfo
MemTotal:           395963896 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
  performance

/usr/bin/lsb_release -d
  Ubuntu 22.04.1 LTS

From /etc/*release* /etc/*version*
  debian_version: bookworm/sid
  os-release:
    PRETTY_NAME="Ubuntu 22.04.1 LTS"
    NAME="Ubuntu"
    VERSION_ID="22.04"
    VERSION="22.04.1 LTS (Jammy Jellyfish)"
    VERSION_CODENAME=jammy
    ID=ubuntu
    ID_LIKE=debian
    HOME_URL="https://www.ubuntu.com/"

uname -a:
  Linux admin1 5.15.0-53-generic #59-Ubuntu SMP Mon Oct 17 18:53:30 UTC 2022 x86_64
  x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):        Not affected
Microarchitectural Data Sampling:          Not affected
CVE-2017-5754 (Meltdown):                 Not affected
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11
(3.00 GHz, AMD EPYC 9124)

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Platform Notes (Continued)

mmio_stale_data:

Not affected

retbleed:

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Retpolines, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling, PBRSB-eIBRS: Not affected

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 Jun 27 18:30

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/ubuntu--vg-ubuntu--lv	ext4	98G	18G	75G	20%	/

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL345 Gen11
Product Family:	ProLiant
Serial:	DL3x5GEN11

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x Hynix HMCG88AEBRA168N	32 GB	2 rank	4800
4x Hynix HMCG88MEBRA113N	32 GB	2 rank	4800
4x Hynix HMCG88MEBRA115N	32 GB	2 rank	4800

BIOS:

BIOS Vendor:	HPE
BIOS Version:	1.12
BIOS Date:	11/24/2022
BIOS Revision:	1.12
Firmware Revision:	1.10

(End of data from sysinfo program)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes

=====

C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
| 644.nab_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

C++, C, Fortran | 607.cactubssn_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
| 654.roms_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on
LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak)
| 628.pop2_s(base, peak)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Compiler Version Notes (Continued)

LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on

LLVM Mirror.Version.14.0.6)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64

607.cactuBSSN_s: -DSPEC_LP64

619.lbm_s: -DSPEC_LP64

621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64

628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

638.imagick_s: -DSPEC_LP64

644.nab_s: -DSPEC_LP64

649.fotonik3d_s: -DSPEC_LP64

654.roms_s: -DSPEC_LP64



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Benchmarks using both Fortran and C:

-Wno-return-type -Wno-unused-command-line-argument

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

619.lbm_s (continued):

```
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

638.imagick_s: Same as 619.lbm_s

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdaloc -lflang
```

```
649.fotonik3d_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -flto -Mrecursive
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp
-lomp -lamdlibm -lamdaloc -lflang
```

654.roms_s: Same as 603.bwaves_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Optimization Flags (Continued)

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=9
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -finline-aggressive -mllvm -unroll-threshold=100
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL345 Gen11

(3.00 GHz, AMD EPYC 9124)

SPECspeed®2017_fp_base = 139

SPECspeed®2017_fp_peak = 139

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Dec-2022

Hardware Availability: Dec-2022

Software Availability: Nov-2022

Peak Other Flags (Continued)

Benchmarks using Fortran, C, and C++:

-Wno-return-type -Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Genoa-rev2.1.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-06-27 14:32:48-0400.

Report generated on 2023-02-01 18:27:57 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.