



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3


**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** May-2022

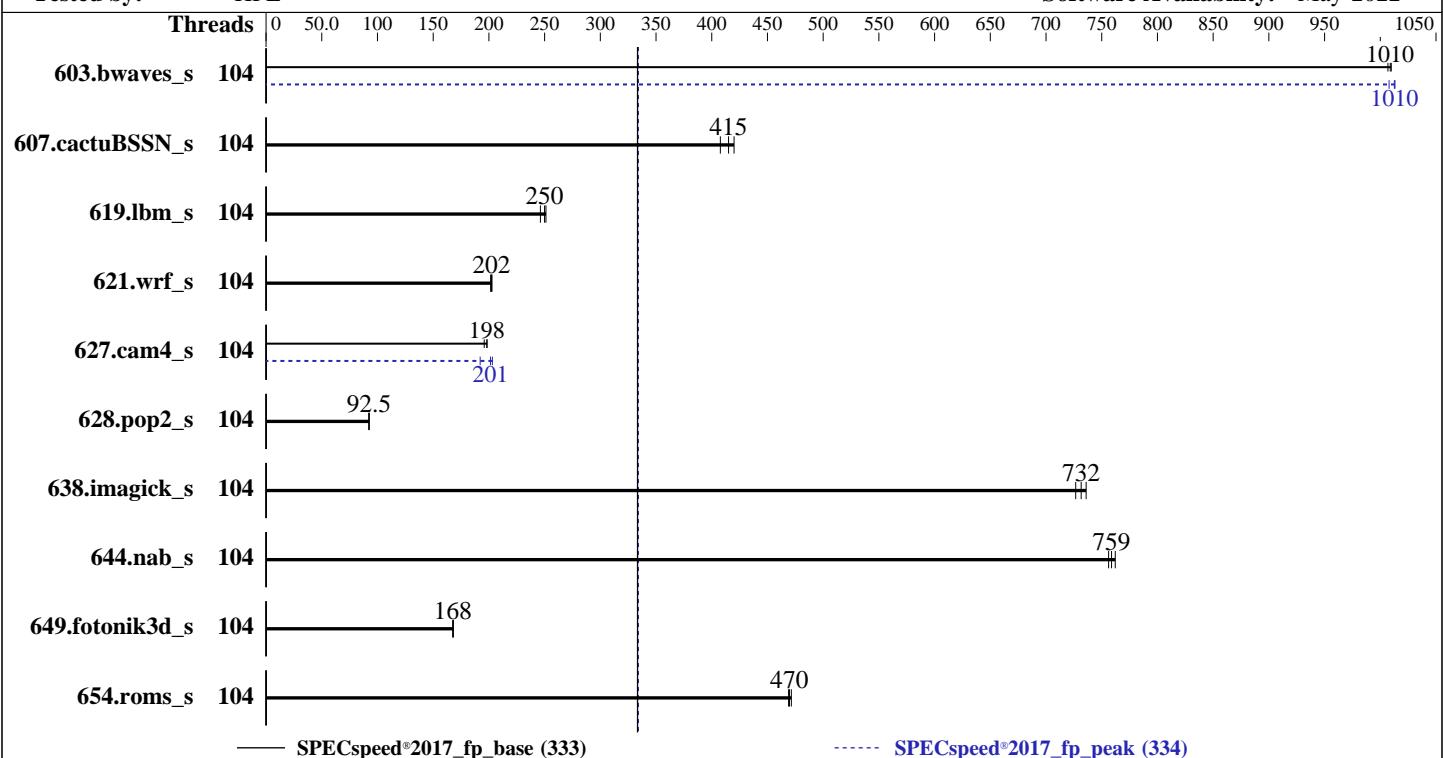

Hardware		Software	
CPU Name:	Intel Xeon Platinum 8470	OS:	Red Hat Enterprise Linux release 9.0 (Plow)
Max MHz:	3800		Kernel 5.14.0-70.13.1.el9_0.x86_64
Nominal:	2000	Compiler:	C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
Enabled:	96 cores, 2 chips		Fortran: Version 2022.1 of Intel Fortran Compiler for Linux
Orderable:	1, 2 chip(s)	Parallel:	Yes
Cache L1:	32 KB I + 48 KB D on chip per core	Firmware:	HPE BIOS Version v1.22 01/18/2023 released Jan-2023
L2:	2 MB I+D on chip per core	File System:	xfs
L3:	105 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)	Peak Pointers:	64-bit
Storage:	1 x 400 GB SATA SSD	Other:	jemalloc memory allocator V5.0.1
Other:	None	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** May-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	104	58.4	1010	58.6	1010	<b>58.5</b>	<b>1010</b>	104	58.2	1010	58.5	1010	<b>58.3</b>	<b>1010</b>
607.cactuBSSN_s	104	40.9	408	<b>40.2</b>	<b>415</b>	39.7	420	104	40.9	408	<b>40.2</b>	<b>415</b>	39.7	420
619.lbm_s	104	20.9	251	21.3	246	<b>21.0</b>	<b>250</b>	104	20.9	251	21.3	246	<b>21.0</b>	<b>250</b>
621.wrf_s	104	65.2	203	<b>65.4</b>	<b>202</b>	65.6	202	104	65.2	203	<b>65.4</b>	<b>202</b>	65.6	202
627.cam4_s	104	<b>44.7</b>	<b>198</b>	45.3	196	44.7	198	104	<b>44.0</b>	<b>201</b>	43.6	203	46.1	192
628.pop2_s	104	129	92.3	<b>128</b>	<b>92.5</b>	128	92.5	104	129	92.3	<b>128</b>	<b>92.5</b>	128	92.5
638.imagick_s	104	<b>19.7</b>	<b>732</b>	19.6	736	19.9	727	104	<b>19.7</b>	<b>732</b>	19.6	736	19.9	727
644.nab_s	104	<b>23.0</b>	<b>759</b>	22.9	762	23.1	756	104	<b>23.0</b>	<b>759</b>	22.9	762	23.1	756
649.fotonik3d_s	104	54.2	168	54.4	168	<b>54.3</b>	<b>168</b>	104	54.2	168	54.4	168	<b>54.3</b>	<b>168</b>
654.roms_s	104	33.6	469	<b>33.5</b>	<b>470</b>	33.4	471	104	33.6	469	<b>33.5</b>	<b>470</b>	33.4	471

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
 sync; echo 3 > /proc/sys/vm/drop\_caches  
 runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"  
 LD\_LIBRARY\_PATH = "/home/cpu2017\_19/lib/intel64:/home/cpu2017\_19/je5.0.1-64"  
 MALLOC\_CONF = "retain:true"  
 OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Platinum 8470 processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Workload Profile set to Custom

Intel DMI Link Frequency set to Gen2 Speed

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017\_19/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Thu Feb 16 06:46:59 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_fp\_base = 333

SPECspeed®2017\_fp\_peak = 334

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

## Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
```

---

---

```
1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux
```

---

```
2. w
06:46:59 up 0 min, 0 users, load average: 0.28, 0.09, 0.03
USER      TTY      LOGIN@      IDLE      JCPU      PCPU WHAT
```

---

```
3. Username
From environment variable $USER: root
```

---

```
4. ulimit -a
real-time non-blocking time  (microseconds, -R) unlimited
core file size              (blocks, -c) 0
data seg size               (kbytes, -d) unlimited
scheduling priority         (-e) 0
file size                   (blocks, -f) unlimited
pending signals             (-i) 4127182
max locked memory           (kbytes, -l) 64
max memory size             (kbytes, -m) unlimited
open files                  (-n) 1024
pipe size                   (512 bytes, -p) 8
POSIX message queues        (bytes, -q) 819200
real-time priority          (-r) 0
stack size                  (kbytes, -s) unlimited
cpu time                    (seconds, -t) unlimited
max user processes           (-u) 4127182
```

---

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_fp\_base = 333

SPECspeed®2017\_fp\_peak = 334

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

## Platform Notes (Continued)

virtual memory  
file locks

(kbytes, -v) unlimited  
(-x) unlimited

---

### 5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 28
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/fpspeed.sh
runcpu --nobuild --action validate --define default-platform-flags -c
  ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=104 --tune base,peak -o all --define
    drop_caches fpspeed
runcpu --nobuild --action validate --define default-platform-flags --configfile
  ic2022.1-lin-core-avx512-speed-20220316.cfg --define cores=104 --tune base,peak --output_format all
  --define drop_caches --nopower --runmode speed --tune base:peak --size refspeed fpspeed --nopreenv
  --note-preenv --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0
  --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_19
```

---

### 6. /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) Platinum 8470
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 6
microcode       : 0x2b000161
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores       : 52
siblings         : 52
2 physical ids (chips)
104 processors (hardware threads)
physical id 0: core ids 0-51
physical id 1: core ids 0-51
physical id 0: apicids
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46,48,50,52,54,56,58,60,62,64,66,68,70,72
,74,76,78,80,82,84,86,88,90,92,94,96,98,100,102
physical id 1: apicids
128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162,164,166,168,170,172,174,176,178,1
80,182,184,186,188,190,192,194,196,198,200,202,204,206,208,210,212,214,216,218,220,222,224,226,228,230
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

---

### 7. lscpu

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** May-2022

## Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Address sizes:	46 bits physical, 57 bits virtual
Byte Order:	Little Endian
CPU(s):	104
On-line CPU(s) list:	0-103
Vendor ID:	GenuineIntel
BIOS Vendor ID:	Intel(R) Corporation
Model name:	Intel(R) Xeon(R) Platinum 8470
BIOS Model name:	Intel(R) Xeon(R) Platinum 8470
CPU family:	6
Model:	143
Thread(s) per core:	1
Core(s) per socket:	52
Socket(s):	2
Stepping:	6
BogoMIPS:	4000.00
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pkru ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxlptrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:	VT-x
L1d cache:	4.9 MiB (104 instances)
L1i cache:	3.3 MiB (104 instances)
L2 cache:	208 MiB (104 instances)
L3 cache:	210 MiB (2 instances)
NUMA node(s):	2
NUMA node0 CPU(s):	0-25,52-77
NUMA node1 CPU(s):	26-51,78-103
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** May-2022

## Platform Notes (Continued)

Vulnerability Meltdown: Not affected

Vulnerability Spec store bypass: Mitigation: Speculative Store Bypass disabled via prctl

Vulnerability Spectre v1: Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2: Mitigation: Enhanced IBRS, IBPB conditional, RSB filling

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	4.9M	12	Data	1	64	1	64
L1i	32K	3.3M	8	Instruction	1	64	1	64
L2	2M	208M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

-----  
8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-25,52-77

node 0 size: 515797 MB

node 0 free: 514015 MB

node 1 cpus: 26-51,78-103

node 1 size: 516037 MB

node 1 free: 514920 MB

node distances:

node 0 1

0: 10 20

1: 20 10

-----  
9. /proc/meminfo

MemTotal: 1056599300 kB

-----  
10. who -r

run-level 3 Feb 16 06:46

-----  
11. Systemd service manager version: systemd 250 (250-6.el9\_0)

Default Target Status

multi-user running

-----  
12. Services, from systemctl list-unit-files

STATE UNIT FILES

enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
---------	---

**(Continued on next page)**



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

**Test Date:** Feb-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** May-2022

## Platform Notes (Continued)

```
nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
systemd-network-generator tuned udisks2 upower
```

```
enabled-runtime systemd-remount-fs
```

```
disabled blk-availability canberra-system-bootup canberra-system-shutdown
```

```
canberra-system-shutdown-reboot chrony-wait console-getty cpupower debug-shell
hwloc-dump-hwdata ipsec kvm_stat man-db-restart-cache-update nftables powertop rdisc rhsm
```

```
rhsm-facts rpmdb-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures
```

```
systemd-pstore systemd-sysext
```

```
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

---

13. Linux kernel boot-time arguments, from /proc/cmdline

```
BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
```

```
root=/dev/mapper/rhel-root
```

```
ro
```

```
resume=/dev/mapper/rhel-swap
```

```
rd.lvm.lv=rhel/root
```

```
rd.lvm.lv=rhel/swap
```

---

14. cpupower frequency-info

```
analyzing CPU 0:
```

```
  Unable to determine current policy
```

```
  boost state support:
```

```
    Supported: yes
```

```
    Active: yes
```

---

15. tuned-adm active

```
  Current active profile: accelerator-performance
```

---

16. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	2
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0
vm.dirty_background_ratio	10
vm.dirty_bytes	0
vm.dirty_expire_centisecs	3000
vm.dirty_ratio	40
vm.dirty_writeback_centisecs	500
vm.dirtytime_expire_seconds	43200
vm.extfrag_threshold	500
vm.min_unmapped_ratio	1
vm.nr_hugepages	0
vm.nr_hugepages_mempolicy	0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Platform Notes (Continued)

```
vm.nr_overcommit_hugepages      0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           0
```

---

```
17. /sys/kernel/mm/transparent_hugepage
    defrag          always defer defer+madvise [madvise] never
    enabled         [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled   always within_size advise [never] deny force
```

---

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs     60000
    defrag                   1
    max_ptes_none            511
    max_ptes_shared          256
    max_ptes_swap             64
    pages_to_scan            4096
    scan_sleep_millisecs     10000
```

---

```
19. OS release
  From /etc/*-release /etc/*-version
  os-release      Red Hat Enterprise Linux 9.0 (Plow)
  redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
  system-release  Red Hat Enterprise Linux release 9.0 (Plow)
```

---

```
20. Disk information
SPEC is set to: /home/cpu2017_19
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/mapper/rhel-home xfs   372G  363G  8.8G  98%  /home
```

---

```
21. /sys/devices/virtual/dmi/id
  Vendor:        HPE
  Product:       ProLiant DL380 Gen11
  Product Family: ProLiant
  Serial:        CNX21000G8
```

---

```
22. dmidecode
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Platform Notes (Continued)

determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Hynix HMCG94AEBRA103N 64 GB 2 rank 4800

---

### 23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE  
BIOS Version: 1.22  
BIOS Date: 01/18/2023  
BIOS Revision: 1.22  
Firmware Revision: 1.10

## Compiler Version Notes

---

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Compiler Version Notes (Continued)

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

<b>Hewlett Packard Enterprise</b> (Test Sponsor: HPE) <b>ProLiant DL380 Gen11</b> (2.00 GHz, Intel Xeon Platinum 8470)	<b>SPECspeed®2017_fp_base = 333</b> <b>SPECspeed®2017_fp_peak = 334</b>
<b>CPU2017 License:</b> 3 <b>Test Sponsor:</b> HPE <b>Tested by:</b> HPE	<b>Test Date:</b> Feb-2023 <b>Hardware Availability:</b> Jan-2023 <b>Software Availability:</b> May-2022

## Base Optimization Flags

### C benchmarks:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -floop-  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Fortran benchmarks:

## Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -floop-  
-mfpmath=sse -funroll-loops -fopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

## Fortran benchmarks:

ifx

### Benchmarks using both Fortran and C:

ifx icx

### Benchmarks using Fortran, C, and C++:

icpx icx ifx

# Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

SPECspeed®2017\_fp\_base = 333

SPECspeed®2017\_fp\_peak = 334

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: May-2022

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib
-ljemalloc
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>  
[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>  
[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380 Gen11

(2.00 GHz, Intel Xeon Platinum 8470)

**SPECspeed®2017\_fp\_base = 333**

**SPECspeed®2017\_fp\_peak = 334**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Feb-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-15 20:16:59-0500.

Report generated on 2023-03-29 00:36:34 by CPU2017 PDF formatter v6442.

Originally published on 2023-03-28.