SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6454S, 2.20GHz)

SPECrate®2017_fp_base = 666

SPECrate®2017_fp_peak = 678

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

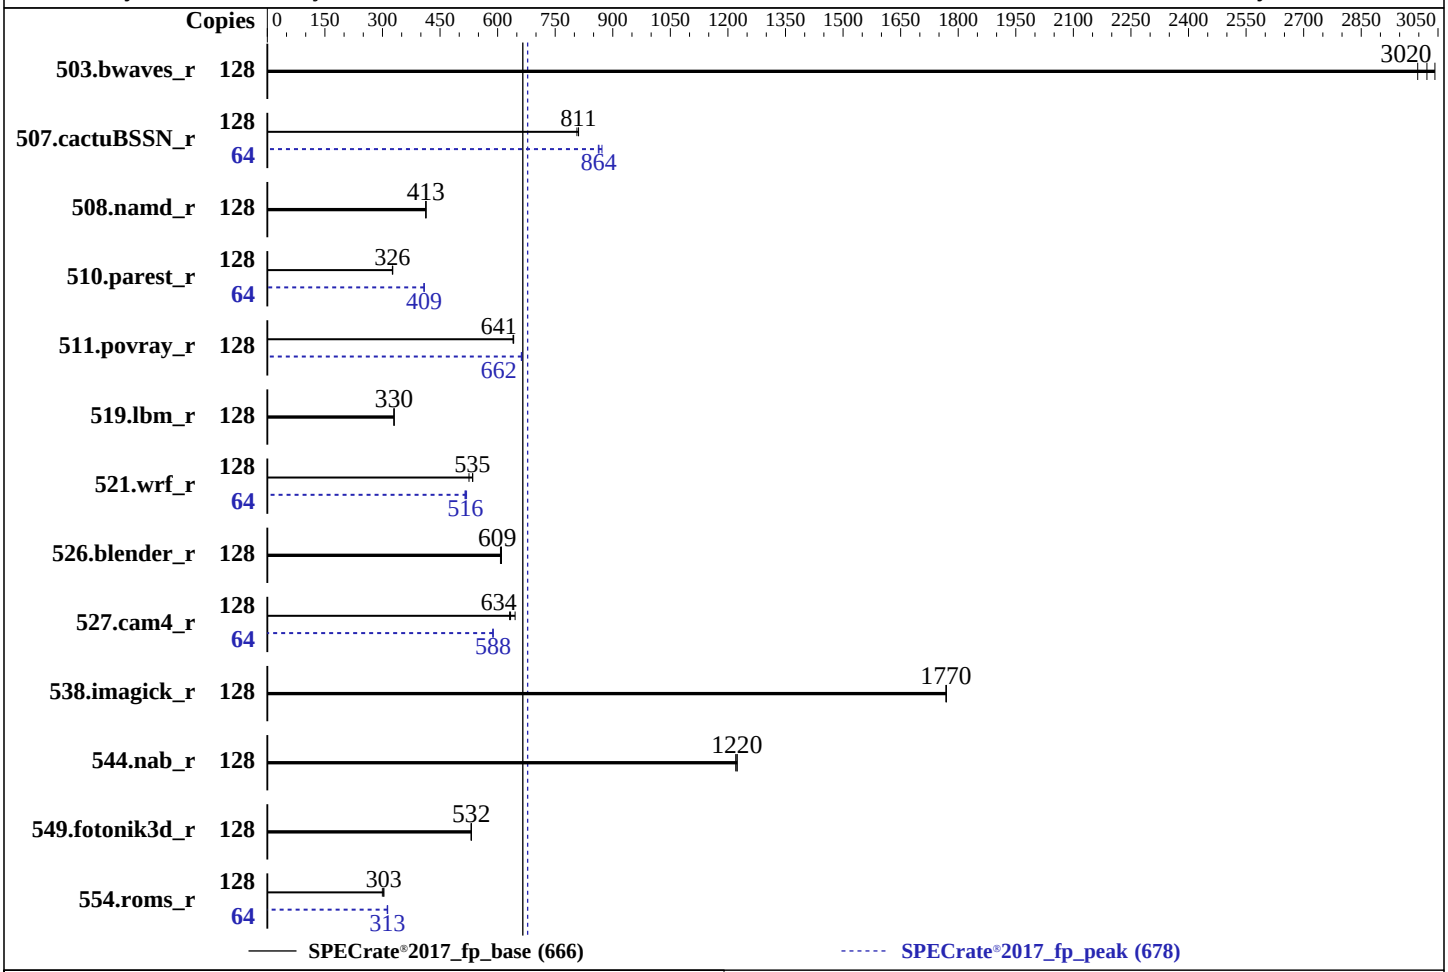

Hardware

CPU Name:	Intel Xeon Gold 6454S
Max MHz:	3400
Nominal:	2200
Enabled:	64 cores, 2 chips, 2 threads/core
Orderable:	1,2 Chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	60 MB I+D on chip per chip
Other:	None
Memory:	1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB M.2 SSD SATA
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 5.1.1a released Feb-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS X210c M7 (Intel Xeon Gold 6454S, 2.20GHz)

SPECrate®2017_fp_base = 666

SPECrate®2017_fp_peak = 678

CPU2017 License: 9019
Test Sponsor: Cisco Systems
Tested by: Cisco Systems

Test Date: Mar-2023
Hardware Availability: Mar-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	422	3040	**425**	**3020**	428	3000	128	422	3040	**425**	**3020**	428	3000
507.cactuBSSN_r	128	201	807	**200**	**811**	200	811	64	**93.8**	**864**	92.9	872	94.0	862
508.namd_r	128	**294**	**413**	294	414	295	413	128	**294**	**413**	294	414	295	413
510.parest_r	128	**1026**	**326**	1028	326	1025	327	64	**410**	**409**	410	408	410	409
511.povray_r	128	467	640	**466**	**641**	466	642	128	451	663	**451**	**662**	452	662
519.lbm_r	128	**409**	**330**	409	330	409	330	128	**409**	**330**	409	330	409	330
521.wrf_r	128	536	535	**536**	**535**	546	525	64	278	515	**278**	**516**	276	519
526.blender_r	128	**320**	**609**	320	610	321	607	128	**320**	**609**	320	610	321	607
527.cam4_r	128	355	631	**353**	**634**	347	646	64	191	588	**190**	**588**	190	588
538.imagick_r	128	180	1770	180	1770	**180**	**1770**	128	180	1770	180	1770	**180**	**1770**
544.nab_r	128	177	1220	176	1220	**176**	**1220**	128	177	1220	176	1220	**176**	**1220**
549.fotonik3d_r	128	**938**	**532**	939	531	938	532	128	**938**	**532**	939	531	938	532
554.roms_r	128	670	303	679	300	**670**	**303**	64	326	312	**325**	**313**	324	313

SPECrate®2017_fp_base = 666

SPECrate®2017_fp_peak = 678

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
```

(Continued on next page)

General Notes (Continued)

```
 sync; echo 3>       /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 jemalloc, a general purpose malloc implementation
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
 sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS Settings:
Sub NUMA Clustering set to Enable SNC4
LLC Dead Line set to Disabled
ADDDC Sparing set to Disabled
Processor C6 Report set to Enabled
UPI Link Enablement 3
UPI Power Management Enabled

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on x210C-Srv01 Wed Mar 22 07:33:45 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
```

(Continued on next page)

Platform Notes (Continued)

```
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -a
   Linux x210C-Srv01 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
    x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
 2. w
     07:33:45 up 13 min,  1 user,  load average: 0.07, 0.11, 0.18
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
   root     tty1     -                07:32    8.00s  1.40s  0.20s -bash

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   core file size          (blocks, -c) unlimited
   data seg size           (kbytes, -d) unlimited
   scheduling priority             (-e) 0
   file size               (blocks, -f) unlimited
   pending signals                 (-i) 4126801
   max locked memory       (kbytes, -l) 64
   max memory size         (kbytes, -m) unlimited
   open files                      (-n) 1024
   pipe size            (512 bytes, -p) 8
   POSIX message queues     (bytes, -q) 819200
   real-time priority              (-r) 0
   stack size              (kbytes, -s) unlimited
   cpu time               (seconds, -t) unlimited
   max user processes              (-u) 4126801
   virtual memory          (kbytes, -v) unlimited
   file locks                      (-x) unlimited

------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize 30
```

(Continued on next page)

Platform Notes (Continued)

```
  login -- root
  -bash
  -bash
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 -c
    ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
    cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all -o all
     fprate
  runcpu --nobuild --action validate --define default-platform-flags --define numcopies=128 --configfile
    ic2023.0-lin-sapphirerapids-rate-20221201.cfg --reportable --iterations 3 --define smt-on --define
    cores=64 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune all
    --output_format all --nopower --runmode rate --tune base:peak --size refrate fprate --nopreenv
    --note-preenv --logfile $SPEC/tmp/CPU2017.066/templogs/preenv.fprate.066.0.log --lognum 066.0
     --from_runcpu 2
  specperl $SPEC/bin/sysinfo
 $SPEC = /home/cpu2017

 ------------------------------------------------------------
 6. /proc/cpuinfo
     model name      : Intel(R) Xeon(R) Gold 6454S
     vendor_id       : GenuineIntel
     cpu family      : 6
     model           : 143
     stepping        : 8
     microcode       : 0x2b000161
     bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
     cpu cores       : 32
     siblings        : 64
     2 physical ids (chips)
     128 processors (hardware threads)
     physical id 0: core ids 0-31
     physical id 1: core ids 0-31
     physical id 0: apicids 0-63
     physical id 1: apicids 128-191
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          128
   On-line CPU(s) list:             0-127
   Vendor ID:                       GenuineIntel
```

(Continued on next page)

Platform Notes (Continued)

```
  Model name:                      Intel(R) Xeon(R) Gold 6454S
  CPU family:                      6
  Model:                           143
  Thread(s) per core:              2
  Core(s) per socket:              32
  Socket(s):                       2
  Stepping:                        8
  CPU max MHz:                     3400.0000
  CPU min MHz:                     800.0000
  BogoMIPS:                        4400.00
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                   lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                   nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                   ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                                   x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                                   abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 invpcid_single
                                   intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase
                                   tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f
                                   avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd
                                   sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc
                                   cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect avx_vnni
                                   avx512_bf16 wbnoinvd dtherm ida arat pln pts hwp hwp_act_window hwp_epp
                                   hwp_pkg_req avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
                                   vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid
                                   bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
                                   tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
  L1d cache:                       3 MiB (64 instances)
  L1i cache:                       2 MiB (64 instances)
  L2 cache:                        128 MiB (64 instances)
  L3 cache:                        120 MiB (2 instances)
  NUMA node(s):                    8
  NUMA node0 CPU(s):               0-7,64-71
  NUMA node1 CPU(s):               8-15,72-79
  NUMA node2 CPU(s):               16-23,80-87
  NUMA node3 CPU(s):               24-31,88-95
  NUMA node4 CPU(s):               32-39,96-103
  NUMA node5 CPU(s):               40-47,104-111
  NUMA node6 CPU(s):               48-55,112-119
  NUMA node7 CPU(s):               56-63,120-127
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       3M   12 Data            1    64        1             64
     L1i       32K       2M    8 Instruction     1    64        1             64
     L2         2M     128M   16 Unified         2  2048        1             64
     L3        60M     120M   15 Unified         3 65536        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-7,64-71
  node 0 size: 128666 MB
  node 0 free: 127720 MB
  node 1 cpus: 8-15,72-79
  node 1 size: 129019 MB
  node 1 free: 128816 MB
  node 2 cpus: 16-23,80-87
  node 2 size: 129019 MB
  node 2 free: 128707 MB
  node 3 cpus: 24-31,88-95
  node 3 size: 128985 MB
  node 3 free: 128771 MB
  node 4 cpus: 32-39,96-103
  node 4 size: 129019 MB
  node 4 free: 128793 MB
  node 5 cpus: 40-47,104-111
  node 5 size: 129019 MB
  node 5 free: 128838 MB
  node 6 cpus: 48-55,112-119
  node 6 size: 129019 MB
  node 6 free: 128837 MB
  node 7 cpus: 56-63,120-127
  node 7 size: 128972 MB
  node 7 free: 128806 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  21  21  21  21
    1:  12  10  12  12  21  21  21  21
    2:  12  12  10  12  21  21  21  21
    3:  12  12  12  10  21  21  21  21
    4:  21  21  21  21  10  12  12  12
    5:  21  21  21  21  12  10  12  12
    6:  21  21  21  21  12  12  10  12
```

(Continued on next page)

Platform Notes (Continued)

```
     7:  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1056485764 kB

------------------------------------------------------------
10. who -r
  run-level 3 Mar 22 07:21

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled         YaST2-Firstboot YaST2-Second-Stage auditd cron getty@ haveged irqbalance issue-generator
                  kbdsettings klog lvm2-monitor nscd nvmefc-boot-connections postfix purge-kernels rollback
                   rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled        autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged-switch-root ipmi ipmievd issue-add-ssh-keys kexec-load
                    lunmask man-db-create multipathd nfs nfs-blkmap nvmf-autoconnect rdisc rpcbind
                   rpmconfigcheck rsyncd serial-getty@ smartd_generate_opts snmpd snmptrapd svnserve
                     systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                      systemd-time-wait-sync systemd-timesyncd udisks2
  indirect          wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=5b2cf68b-5ea8-49bc-95bd-e1641911f2b0
  splash=silent
  mitigations=auto
  quiet
  security=

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 3.40 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
```

(Continued on next page)

Platform Notes (Continued)

```
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sda3      xfs   883G   14G  870G   2% /

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Cisco Systems Inc
    Product:        UCSX-210C-M7
    Serial:         FCH263672AT

------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     8x 0xAD00 HMCG94MEBRA109N 64 GB 2 rank 4800
     8x 0xAD00 HMCG94MEBRA121N 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Cisco Systems, Inc.
   BIOS Version:      X210M7.5.1.1a.0.0201231806
   BIOS Date:         02/01/2023
   BIOS Revision:     5.29
```

Compiler Version Notes

```
==============================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak)
                | 544.nab_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
```

(Continued on next page)

Compiler Version Notes (Continued)

```
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                | 554.roms_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
```
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:
```
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:
```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both Fortran and C:
```
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using both C and C++:
```
-w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Benchmarks using Fortran, C, and C++:
```
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

Peak Compiler Invocation

C benchmarks:
```
icx
```

C++ benchmarks:
```
icpx
```

(Continued on next page)

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Benchmarks using both Fortran and C:
ifx icx

Benchmarks using both C and C++:
icpx icx

Benchmarks using Fortran, C, and C++:
icpx icx ifx

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: basepeak = yes

538.imagick_r: basepeak = yes

544.nab_r: basepeak = yes

C++ benchmarks:

508.namd_r: basepeak = yes

510.parest_r: -w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mprefer-vector-width=512
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Fortran benchmarks:

503.bwaves_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

549.fotonik3d_r: basepeak = yes

554.roms_r: -w -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both Fortran and C:
-w -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-Wno-implicit-int -mprefer-vector-width=512 -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib

Benchmarks using both C and C++:

511.povray_r: -w -std=c++14 -m64 -std=c11 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -Wno-implicit-int
-mprefer-vector-width=512 -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:
-w -m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml
http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.0-SPR-revG.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-22 10:33:45-0400.
Report generated on 2023-04-12 12:48:05 by CPU2017 PS formatter v6442.
Originally published on 2023-04-11.