SPEC CPU®2017 Integer Speed Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX8770 M7, Intel Xeon Platinum 8444H, 2.90GHz

SPECspeed®2017_int_base = 12.6

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19
Test Sponsor: Fujitsu
Tested by: Fujitsu

Test Date: Apr-2023
Hardware Availability: Jun-2023
Software Availability: Dec-2022

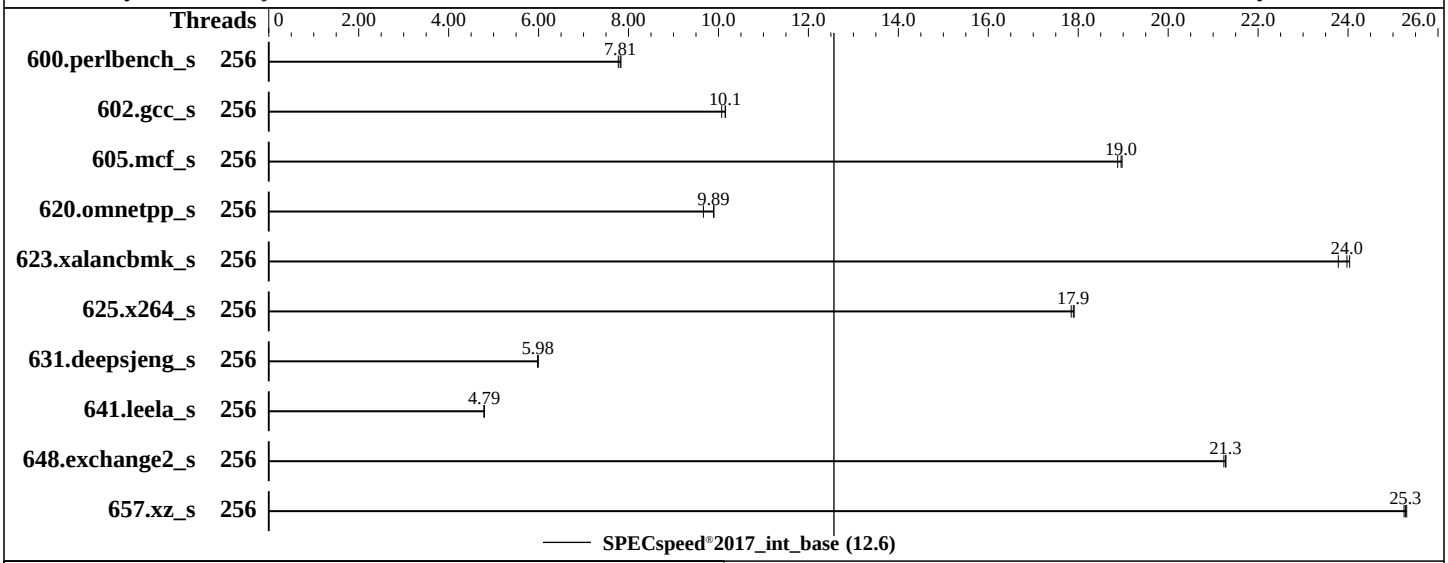

Hardware

CPU Name:	Intel Xeon Platinum 8444H
Max MHz:	4000
Nominal:	2900
Enabled:	128 cores, 8 chips, 2 threads/core
Orderable:	8 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	45 MB I+D on chip per chip
Other:	None
Memory:	4 TB (64 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x SATA SSD, 3.84TB
Other:	1 x Fujitsu PRAID EP740i Raid Card

Software

OS:	SUSE Linux Enterprise Server 15 SP4 5.14.21-150400.22-default
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	Yes
Firmware:	Fujitsu BIOS Version V1.0.0.0 R1.2.0 for D4029-C1x. Released Jun-2023 tested as V1.0.0.0 R0.11.0 for D4029-C1x Feb-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS set to prefer performance at the cost of additional power usage

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	227	7.83	**227**	**7.81**	228	7.77							
602.gcc_s	256	392	10.2	**392**	**10.1**	395	10.1							
605.mcf_s	256	249	19.0	**249**	**19.0**	250	18.9							
620.omnetpp_s	256	165	9.90	**165**	**9.89**	169	9.67							
623.xalancbmk_s	256	59.0	24.0	**59.1**	**24.0**	59.6	23.8							
625.x264_s	256	98.5	17.9	98.9	17.8	**98.6**	**17.9**							
631.deepsjeng_s	256	239	5.99	**239**	**5.98**	240	5.98							
641.leela_s	256	356	4.79	356	4.79	**356**	**4.79**							
648.exchange2_s	256	138	21.3	138	21.2	**138**	**21.3**							
657.xz_s	256	244	25.3	**245**	**25.3**	245	25.2							

SPECspeed®2017_int_base = 12.6

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/benchmark/speccpu/lib/intel64:/home/benchmark/speccpu/je5.0.1-64"
MALLOC_CONF = "retain:true"
OMP_STACKSIZE = "192M"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Redhat Enterprise Linux 8.0
Transparent Huge Pages enabled by default
Prior to runcpu invocation
```

(Continued on next page)

General Notes (Continued)

```
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases
```

Platform Notes

```
BIOS configuration:
Adjacent Cache Line Prefetch = Disabled
LLC Dead Line Alloc = Disabled

Sysinfo program /home/benchmark/speccpu/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Apr 24 15:22:03 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
```

(Continued on next page)

Platform Notes (Continued)

```
   15:22:03 up 2 min,  2 users,  load average: 4.73, 3.83, 1.57
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                15:21   35.00s  0.06s  0.06s -bash
  root     pts/0    192.168.1.114    15:21   11.00s  1.71s  0.12s
  /home/benchmark/ptu_v4.0/UNIFIED_SERVER_PTAT_V4.0.0_20230110/ptat -mon -i 5000000 -filter 0x3f -y -ts -csv
  -log

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 16510530
  max locked memory       (kbytes, -l) 64
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 16510530
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@pts/0
 -bash
 -bash
 runcpu --nobuild --action validate --define default-platform-flags -c
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=128 --tune base -o all --define
   intspeedaffinity --define drop_caches --define smt-on intspeed
 runcpu --nobuild --action validate --define default-platform-flags --configfile
   ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=128 --tune base --output_format all --define
   intspeedaffinity --define drop_caches --define smt-on --nopower --runmode speed --tune base --size
   refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.001/templogs/preenv.intspeed.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/benchmark/speccpu

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8444H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b000161
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 16
    siblings        : 32
    8 physical ids (chips)
```

(Continued on next page)

Platform Notes (Continued)

```
     256 processors (hardware threads)
     physical id 0: core ids 0-15
     physical id 1: core ids 0-15
     physical id 2: core ids 0-15
     physical id 3: core ids 0-15
     physical id 4: core ids 0-15
     physical id 5: core ids 0-15
     physical id 6: core ids 0-15
     physical id 7: core ids 0-15
     physical id 0: apicids 0-31
     physical id 1: apicids 128-159
     physical id 2: apicids 256-287
     physical id 3: apicids 384-415
     physical id 4: apicids 512-543
     physical id 5: apicids 640-671
     physical id 6: apicids 768-799
     physical id 7: apicids 896-927
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
   virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.37.2:
   Architecture:                    x86_64
   CPU op-mode(s):                  32-bit, 64-bit
   Address sizes:                   46 bits physical, 57 bits virtual
   Byte Order:                      Little Endian
   CPU(s):                          256
   On-line CPU(s) list:             0-255
   Vendor ID:                       GenuineIntel
   Model name:                      Intel(R) Xeon(R) Platinum 8444H
   CPU family:                      6
   Model:                           143
   Thread(s) per core:              2
   Core(s) per socket:              16
   Socket(s):                       8
   Stepping:                        8
   CPU max MHz:                     4000.0000
   CPU min MHz:                     800.0000
   BogoMIPS:                        5800.00
   Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                    nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                    invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
                                    tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle
                                    avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap
                                    avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
                                    xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                    cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
                                    arat pln pts hwp hwp_act_window hwp_epp hwp_pkg_req avx512vbmi umip pku
                                    ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                    tme avx512_vpopcntdq la57 rdpid bus_lock_detect cldemote movdiri movdir64b
                                    enqcmd fsrm md_clear serialize tsxldtrk pconfig arch_lbr avx512_fp16
                                    amx_tile flush_l1d arch_capabilities
   Virtualization:                  VT-x
```

(Continued on next page)

Platform Notes (Continued)

```
  L1d cache:                       6 MiB (128 instances)
  L1i cache:                       4 MiB (128 instances)
  L2 cache:                        256 MiB (128 instances)
  L3 cache:                        360 MiB (8 instances)
  NUMA node(s):                    8
  NUMA node0 CPU(s):               0-15,128-143
  NUMA node1 CPU(s):               16-31,144-159
  NUMA node2 CPU(s):               32-47,160-175
  NUMA node3 CPU(s):               48-63,176-191
  NUMA node4 CPU(s):               64-79,192-207
  NUMA node5 CPU(s):               80-95,208-223
  NUMA node6 CPU(s):               96-111,224-239
  NUMA node7 CPU(s):               112-127,240-255
  Vulnerability Itlb multihit:     Not affected
  Vulnerability L1tf:              Not affected
  Vulnerability Mds:               Not affected
  Vulnerability Meltdown:          Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
  Vulnerability Srbds:             Not affected
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1    64        1             64
     L1i       32K       4M    8 Instruction     1    64        1             64
     L2         2M     256M   16 Unified         2  2048        1             64
     L3        45M     360M   15 Unified         3 49152        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-15,128-143
  node 0 size: 515536 MB
  node 0 free: 513566 MB
  node 1 cpus: 16-31,144-159
  node 1 size: 516087 MB
  node 1 free: 515579 MB
  node 2 cpus: 32-47,160-175
  node 2 size: 516087 MB
  node 2 free: 515574 MB
  node 3 cpus: 48-63,176-191
  node 3 size: 516087 MB
  node 3 free: 515215 MB
  node 4 cpus: 64-79,192-207
  node 4 size: 516053 MB
  node 4 free: 515151 MB
  node 5 cpus: 80-95,208-223
  node 5 size: 516087 MB
  node 5 free: 514532 MB
  node 6 cpus: 96-111,224-239
  node 6 size: 516087 MB
  node 6 free: 515581 MB
  node 7 cpus: 112-127,240-255
  node 7 size: 515629 MB
  node 7 free: 514667 MB
  node distances:
  node   0   1   2   3   4   5   6   7
```

(Continued on next page)

Platform Notes (Continued)

```
     0:  10  21  21  31  31  21  21  31
     1:  21  10  31  21  21  31  31  21
     2:  21  31  10  21  21  31  31  21
     3:  31  21  21  10  31  21  21  31
     4:  31  21  21  31  10  21  21  31
     5:  21  31  31  21  21  10  31  21
     6:  21  31  31  21  21  31  10  21
     7:  31  21  21  31  31  21  21  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       4226721424 kB

------------------------------------------------------------
10. who -r
  run-level 3 Apr 24 15:20

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT           LOAD   ACTIVE SUB    DESCRIPTION
  * smartd.service loaded failed failed Self Monitoring and Reporting Technology (SMART) Daemon

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd bluetooth cron display-manager getty@
                   haveged irqbalance iscsi issue-generator kbdsettings kdump kdump-early klog lvm2-monitor
                   nscd postfix purge-kernels rollback rsyslog smartd sshd wicked wickedd-auto4 wickedd-dhcp4
                   wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         accounts-daemon appstream-sync-cache autofs autoyast-initscripts blk-availability
                   bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups
                   cups-browsed debug-shell ebtables exchange-bmc-os-info firewalld gpm grub2-once
                   haveged-switch-root ipmi ipmievd iscsi-init iscsid iscsiuio issue-add-ssh-keys kexec-load
                   lunmask man-db-create multipathd nfs nfs-blkmap nmb ostree-remount rdisc rpcbind
                   rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd
                   speech-dispatcherd systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd udisks2 upower
  indirect         wickedd

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=c13187e0-8b8c-4db9-ba32-defaefe6232c
  splash=silent
  mitigations=auto
  quiet
  security=apparmor
  crashkernel=375M,high
  crashkernel=72M,low

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 800 MHz and 4.00 GHz.
```

(Continued on next page)

Platform Notes (Continued)

```
                  The governor "powersave" may decide which speed to use
                  within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          2
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                    20
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                     60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               0

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/benchmark/speccpu
  Filesystem     Type  Size  Used Avail Use% Mounted on
  /dev/sdb2      xfs   3.5T   20G  3.5T   1% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Vendor:         FUJITSU
    Product:        n/a
```

(Continued on next page)

Platform Notes (Continued)

```
     Product Family: SERVER
     Serial:         n/a

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     7x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
     31x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
     26x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       FUJITSU
    BIOS Version:      V1.0.0.0 R0.11.0 for D4029-C1x
    BIOS Date:         02/28/2023
    BIOS Revision:     0.11
    Firmware Revision: 2.0
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base) 625.x264_s(base) 657.xz_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base) 641.leela_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base)
--------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

(Continued on next page)

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifx

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:
-m64 -std=c++14 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

Fortran benchmarks:
-m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.html
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0-SPR-RevB.xml
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-04-24 02:22:03-0400.
Report generated on 2024-01-29 17:41:20 by CPU2017 PS formatter v6716.
Originally published on 2023-05-09.