SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1470

SPECrate®2017_int_peak = 1500

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

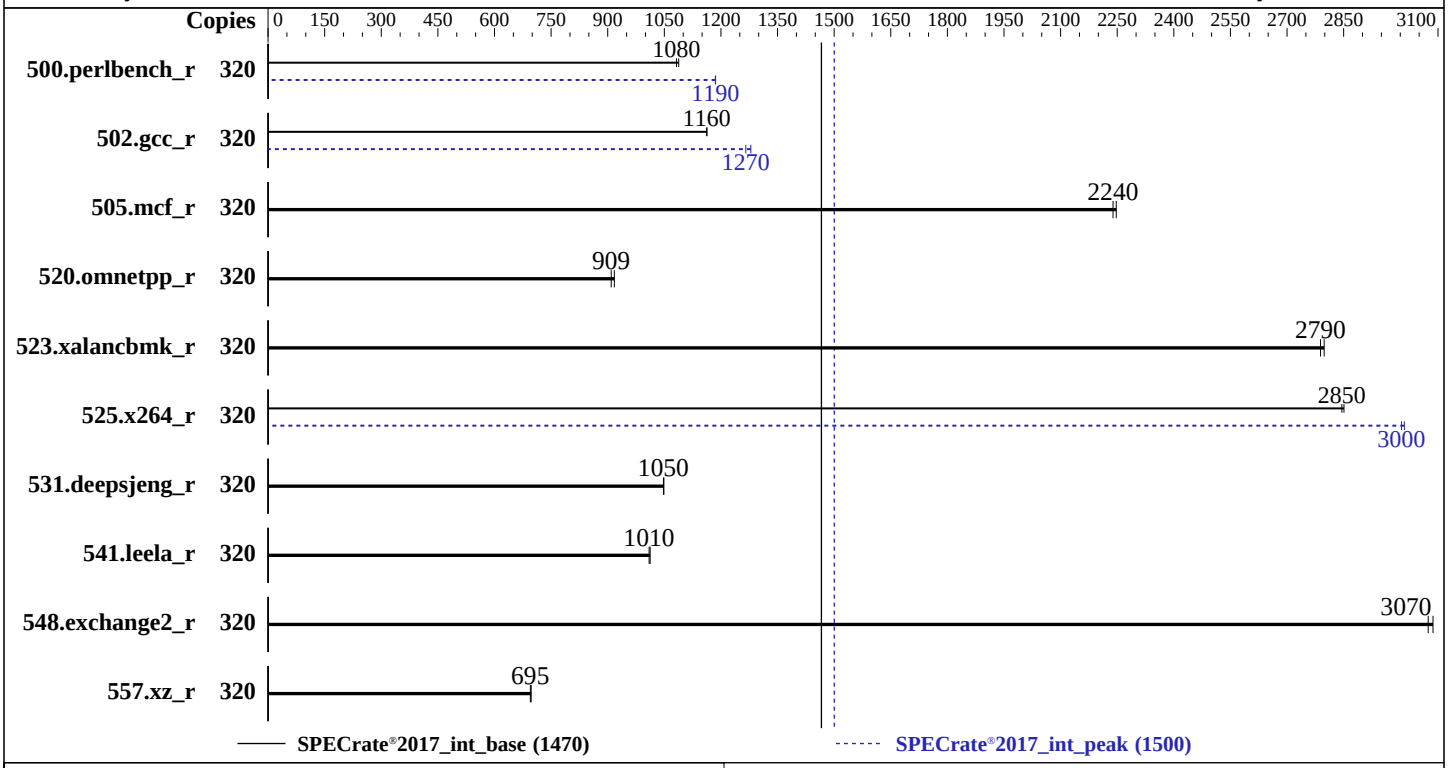

Hardware

CPU Name:	Intel Xeon Platinum 8460H
Max MHz:	3800
Nominal:	2200
Enabled:	160 cores, 4 chips, 2 threads/core
Orderable:	2,4 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	105 MB I+D on chip per chip
Other:	None
Memory:	2 TB (32 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	160 GB on tmpfs
Other:	None

Software

OS:	Red Hat Enterprise Linux 9.0 (Plow) 5.14.0-70.13.1.el9_0.x86_64
Compiler:	C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel:	No
Firmware:	Version 1.4.0 released Mar-2023
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R960 (Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1470

SPECrate®2017_int_peak = 1500

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Mar-2023
Hardware Availability: May-2023
Software Availability: Dec-2022

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	320	468	1090	**471**	**1080**			320	**430**	**1190**	430	1190		
502.gcc_r	320	390	1160	**390**	**1160**			320	**358**	**1270**	354	1280		
505.mcf_r	320	**231**	**2240**	230	2250			320	**231**	**2240**	230	2250		
520.omnetpp_r	320	458	918	**462**	**909**			320	458	918	**462**	**909**		
523.xalancbmk_r	320	121	2800	**121**	**2790**			320	121	2800	**121**	**2790**		
525.x264_r	320	197	2850	**197**	**2850**			320	**187**	**3000**	186	3010		
531.deepsjeng_r	320	350	1050	**350**	**1050**			320	350	1050	**350**	**1050**		
541.leela_r	320	523	1010	**525**	**1010**			320	523	1010	**525**	**1010**		
548.exchange2_r	320	272	3090	**273**	**3070**			320	272	3090	**273**	**3070**		
557.xz_r	320	**497**	**695**	496	697			320	**497**	**695**	496	697		

SPECrate®2017_int_base = 1470

SPECrate®2017_int_peak = 1500

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
SPEC has ruled that the compiler used for this result was performing a compilation
that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s
benchmarks using a priori knowledge of the SPEC code and dataset to perform a
transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4
https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer
publish results using this optimization.

This result is left in the SPEC results database for historical reference.
```

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.0/lib/ia32:/mnt/ram
     disk/cpu2017-1.1.9-ic2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using Red Hat Enterprise Linux 8.4
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Benchmark run from a 160 GB ramdisk created with the cmd: "mount -t tmpfs -o size=160G tmpfs /mnt/ramdisk"
```

Platform Notes

```
BIOS settings:
                 ADDDC Setting : Disabled
        DIMM Self Healing on
    Uncorrectable Memory Error : Disabled
       DCU Streamer Prefetcher : Disabled
              Sub NUMA Cluster : 4-way Clustering
                  LLC Prefetch : Disabled
           Dead Line LLC Alloc : Disabled
                Optimizer Mode : Enabled

                System Profile : Custom
          CPU Power Management : Maximum Performance
                           C1E : Disabled
                      C States : Autonomous
           Memory Patrol Scrub : Disabled
      Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
              Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Wed Mar 29 19:24:52 2023

SUT (System Under Test) info as seen by some common utilities.

------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
```

(Continued on next page)

Platform Notes (Continued)

```
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   19:24:52 up 3 min,  1 user,  load average: 1.20, 0.94, 0.42
  USER     TTY        LOGIN@   IDLE   JCPU   PCPU WHAT
  root     :1        19:22   ?xdm?  23:28   0.00s /usr/libexec/gdm-x-session --register-session --run-script
  gnome-session

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  real-time non-blocking time  (microseconds, -R) unlimited
  core file size              (blocks, -c) 0
  data seg size               (kbytes, -d) unlimited
  scheduling priority                 (-e) 0
  file size                   (blocks, -f) unlimited
  pending signals                     (-i) 8251996
  max locked memory           (kbytes, -l) 64
  max memory size             (kbytes, -m) unlimited
  open files                          (-n) 1024
  pipe size                (512 bytes, -p) 8
  POSIX message queues         (bytes, -q) 819200
  real-time priority                  (-r) 0
  stack size                  (kbytes, -s) unlimited
  cpu time                   (seconds, -t) unlimited
  max user processes                  (-u) 8251996
  virtual memory              (kbytes, -v) unlimited
  file locks                          (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd rhgb --switched-root --system --deserialize 31
 /usr/lib/systemd/systemd --user
 /usr/libexec/gnome-terminal-server
 bash
 /bin/bash ./DELL_rate.sh
```

(Continued on next page)

Platform Notes (Continued)

```
 /bin/bash ./dell-run-main.sh rate
 /bin/bash ./dell-run-main.sh rate
 /bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
   --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
 /bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1
   --define DL-BIOS-SNC=4 --output_format csv,html,pdf,txt
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 -c
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2 --define
   DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
   csv,html,pdf,txt intrate
 runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 --configfile
   ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
   --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
   --define DL-BIOSinc=Dell-BIOS_Xeon-4.inc --define DL-BIOS-adddcD=1 --define DL-BIOS-SNC=4 --output_format
   csv,html,pdf,txt --nopower --runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.0

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : Intel(R) Xeon(R) Platinum 8460H
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 143
    stepping        : 8
    microcode       : 0x2b0001b0
    bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
    cpu cores       : 40
    siblings        : 80
    4 physical ids (chips)
    320 processors (hardware threads)
    physical id 0: core ids 0-39
    physical id 1: core ids 0-39
    physical id 2: core ids 0-39
    physical id 3: core ids 0-39
    physical id 0: apicids 0-79
    physical id 1: apicids 128-207
    physical id 2: apicids 256-335
    physical id 3: apicids 384-463
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.4:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   46 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          320
  On-line CPU(s) list:             0-319
  Vendor ID:                       GenuineIntel
  BIOS Vendor ID:                  Intel
  Model name:                      Intel(R) Xeon(R) Platinum 8460H
  BIOS Model name:                 Intel(R) Xeon(R) Platinum 8460H
  CPU family:                      6
  Model:                           143
```

(Continued on next page)

Platform Notes (Continued)

```
Thread(s) per core:              2
Core(s) per socket:              40
Socket(s):                       4
Stepping:                        8
BogoMIPS:                        4400.00
Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                                 lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                                 nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
                                 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
                                 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
                                 lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
                                 invpcid_single cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow
                                 vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2 smep bmi2
                                 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                 clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                 xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                 split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                                 avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                                 avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid bus_lock_detect
                                 cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                                 arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
Virtualization:                  VT-x
L1d cache:                       7.5 MiB (160 instances)
L1i cache:                       5 MiB (160 instances)
L2 cache:                        320 MiB (160 instances)
L3 cache:                        420 MiB (4 instances)
NUMA node(s):                    16
NUMA node0 CPU(s):               0,8,16,24,32,40,48,56,64,72,160,168,176,184,192,200,208,216,224,232
NUMA node1 CPU(s):               80,88,96,104,112,120,128,136,144,152,240,248,256,264,272,280,288,296,304,3
                                 12
NUMA node2 CPU(s):               4,12,20,28,36,44,52,60,68,76,164,172,180,188,196,204,212,220,228,236
NUMA node3 CPU(s):               84,92,100,108,116,124,132,140,148,156,244,252,260,268,276,284,292,300,308,
                                 316
NUMA node4 CPU(s):               1,9,17,25,33,41,49,57,65,73,161,169,177,185,193,201,209,217,225,233
NUMA node5 CPU(s):               81,89,97,105,113,121,129,137,145,153,241,249,257,265,273,281,289,297,305,3
                                 13
NUMA node6 CPU(s):               5,13,21,29,37,45,53,61,69,77,165,173,181,189,197,205,213,221,229,237
NUMA node7 CPU(s):               85,93,101,109,117,125,133,141,149,157,245,253,261,269,277,285,293,301,309,
                                 317
NUMA node8 CPU(s):               2,10,18,26,34,42,50,58,66,74,162,170,178,186,194,202,210,218,226,234
NUMA node9 CPU(s):               82,90,98,106,114,122,130,138,146,154,242,250,258,266,274,282,290,298,306,3
                                 14
NUMA node10 CPU(s):              6,14,22,30,38,46,54,62,70,78,166,174,182,190,198,206,214,222,230,238
NUMA node11 CPU(s):              86,94,102,110,118,126,134,142,150,158,246,254,262,270,278,286,294,302,310,
                                 318
NUMA node12 CPU(s):              3,11,19,27,35,43,51,59,67,75,163,171,179,187,195,203,211,219,227,235
NUMA node13 CPU(s):              83,91,99,107,115,123,131,139,147,155,243,251,259,267,275,283,291,299,307,3
                                 15
NUMA node14 CPU(s):              7,15,23,31,39,47,55,63,71,79,167,175,183,191,199,207,215,223,231,239
NUMA node15 CPU(s):              87,95,103,111,119,127,135,143,151,159,247,255,263,271,279,287,295,303,311,
                                 319
Vulnerability Itlb multihit:     Not affected
Vulnerability L1tf:              Not affected
Vulnerability Mds:               Not affected
Vulnerability Meltdown:          Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1:        Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:        Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:             Not affected
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Tsx async abort:   Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K     7.5M   12 Data            1     64        1             64
     L1i       32K       5M    8 Instruction     1     64        1             64
     L2         2M     320M   16 Unified         2   2048        1             64
     L3       105M     420M   15 Unified         3 114688        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 16 nodes (0-15)
  node 0 cpus: 0,8,16,24,32,40,48,56,64,72,160,168,176,184,192,200,208,216,224,232
  node 0 size: 127831 MB
  node 0 free: 125991 MB
  node 1 cpus: 80,88,96,104,112,120,128,136,144,152,240,248,256,264,272,280,288,296,304,312
  node 1 size: 129019 MB
  node 1 free: 128581 MB
  node 2 cpus: 4,12,20,28,36,44,52,60,68,76,164,172,180,188,196,204,212,220,228,236
  node 2 size: 129019 MB
  node 2 free: 119379 MB
  node 3 cpus: 84,92,100,108,116,124,132,140,148,156,244,252,260,268,276,284,292,300,308,316
  node 3 size: 129019 MB
  node 3 free: 128644 MB
  node 4 cpus: 1,9,17,25,33,41,49,57,65,73,161,169,177,185,193,201,209,217,225,233
  node 4 size: 129019 MB
  node 4 free: 128480 MB
  node 5 cpus: 81,89,97,105,113,121,129,137,145,153,241,249,257,265,273,281,289,297,305,313
  node 5 size: 129019 MB
  node 5 free: 128685 MB
  node 6 cpus: 5,13,21,29,37,45,53,61,69,77,165,173,181,189,197,205,213,221,229,237
  node 6 size: 129019 MB
  node 6 free: 128605 MB
  node 7 cpus: 85,93,101,109,117,125,133,141,149,157,245,253,261,269,277,285,293,301,309,317
  node 7 size: 129019 MB
  node 7 free: 128623 MB
  node 8 cpus: 2,10,18,26,34,42,50,58,66,74,162,170,178,186,194,202,210,218,226,234
  node 8 size: 129019 MB
  node 8 free: 128026 MB
  node 9 cpus: 82,90,98,106,114,122,130,138,146,154,242,250,258,266,274,282,290,298,306,314
  node 9 size: 128983 MB
  node 9 free: 128559 MB
  node 10 cpus: 6,14,22,30,38,46,54,62,70,78,166,174,182,190,198,206,214,222,230,238
  node 10 size: 129019 MB
  node 10 free: 128639 MB
  node 11 cpus: 86,94,102,110,118,126,134,142,150,158,246,254,262,270,278,286,294,302,310,318
  node 11 size: 129019 MB
  node 11 free: 128612 MB
  node 12 cpus: 3,11,19,27,35,43,51,59,67,75,163,171,179,187,195,203,211,219,227,235
  node 12 size: 129019 MB
  node 12 free: 128629 MB
  node 13 cpus: 83,91,99,107,115,123,131,139,147,155,243,251,259,267,275,283,291,299,307,315
  node 13 size: 129019 MB
  node 13 free: 128664 MB
  node 14 cpus: 7,15,23,31,39,47,55,63,71,79,167,175,183,191,199,207,215,223,231,239
  node 14 size: 129019 MB
  node 14 free: 128608 MB
  node 15 cpus: 87,95,103,111,119,127,135,143,151,159,247,255,263,271,279,287,295,303,311,319
  node 15 size: 128990 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 15 free: 128674 MB
  node distances:
  node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
    0:  10  12  12  12  21  21  21  21  21  21  21  21  21  21  21  21
    1:  12  10  12  12  21  21  21  21  21  21  21  21  21  21  21  21
    2:  12  12  10  12  21  21  21  21  21  21  21  21  21  21  21  21
    3:  12  12  12  10  21  21  21  21  21  21  21  21  21  21  21  21
    4:  21  21  21  21  10  12  12  12  21  21  21  21  21  21  21  21
    5:  21  21  21  21  12  10  12  12  21  21  21  21  21  21  21  21
    6:  21  21  21  21  12  12  10  12  21  21  21  21  21  21  21  21
    7:  21  21  21  21  12  12  12  10  21  21  21  21  21  21  21  21
    8:  21  21  21  21  21  21  21  21  10  12  12  12  21  21  21  21
    9:  21  21  21  21  21  21  21  21  12  10  12  12  21  21  21  21
   10:  21  21  21  21  21  21  21  21  12  12  10  12  21  21  21  21
   11:  21  21  21  21  21  21  21  21  12  12  12  10  21  21  21  21
   12:  21  21  21  21  21  21  21  21  21  21  21  21  10  12  12  12
   13:  21  21  21  21  21  21  21  21  21  21  21  21  12  10  12  12
   14:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  10  12
   15:  21  21  21  21  21  21  21  21  21  21  21  21  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       2112574252 kB

------------------------------------------------------------
10. who -r
  run-level 5 Mar 29 19:22

------------------------------------------------------------
11. Systemd service manager version: systemd 250 (250-6.el9_0)
  Default Target  Status
  graphical       running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online
                   accounts-daemon atd auditd avahi-daemon bluetooth chronyd crond cups dbus-broker gdm
                   getty@ insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt lm_sensors
                   low-memory-monitor lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
                   nvmefc-boot-connections ostree-remount pmcd pmie pmlogger power-profiles-daemon
                   qemu-guest-agent rhsmcertd rpcbind rsyslog rtkit-daemon selinux-autorelabel-mark smartd
                   sshd sssd switcheroo-control sysstat systemd-network-generator udisks2 upower vgauthd
                   virtqemud vmtoolsd
  enabled-runtime  systemd-remount-fs
  disabled         arp-ethers autofs blk-availability brltty canberra-system-bootup canberra-system-shutdown
                   canberra-system-shutdown-reboot chrony-wait cni-dhcp console-getty cpupower cups-browsed
                   dbus-daemon debug-shell dnsmasq dovecot fancontrol fcoe firewalld grafana-server gssproxy
                   httpd httpd@ ibacm iprdump iprinit iprupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon
                   libvirt-guests libvirtd lldpad man-db-restart-cache-update named named-chroot nfs-blkmap
                   nfs-server nftables nmb numad nvmf-autoconnect pmfind pmie_farm pmlogger_farm pmproxy
                   podman podman-auto-update podman-restart postfix powertop psacct ras-mc-ctl rasdaemon
                   rdisc rhcd rhsm rhsm-facts rpmdb-rebuild rrdcached saslauthd serial-getty@ smb snmpd
                   snmptrapd spamassassin speech-dispatcherd srp_daemon srp_daemon_port@ sshd-keygen@
                   systemd-boot-check-no-failures systemd-nspawn@ systemd-pstore systemd-sysext target
                   targetclid tog-pegasus trace-cmd virtinterfaced virtnetworkd virtnodedevd virtnwfilterd
                   virtproxyd virtsecretd virtstoraged vsftpd wpa_supplicant
  indirect         pcscd spice-vdagentd sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
                   virtlockd virtlogd vsftpd@
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
  root=/dev/mapper/rhel-root
  ro
  crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
  resume=/dev/mapper/rhel-swap
  rd.lvm.lv=rhel/root
  rd.lvm.lv=rhel/swap
  rhgb
  quiet

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
 18. OS release
   From /etc/*-release /etc/*-version
   os-release     Red Hat Enterprise Linux 9.0 (Plow)
   redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
   system-release Red Hat Enterprise Linux release 9.0 (Plow)

 ------------------------------------------------------------
 19. Disk information
 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.0
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs  160G  4.2G  156G   3% /mnt/ramdisk

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R960
     Product Family: PowerEdge

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.3 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     15x 00AD00B300AD HMCG94MEBRA121N 64 GB 2 rank 4800
     17x 00AD063200AD HMCG94MEBRA109N 64 GB 2 rank 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.4.0
    BIOS Date:         03/15/2023
    BIOS Revision:     1.4
```

Compiler Version Notes

```
==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 502.gcc_r(peak)
--------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C       | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
        | 557.xz_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
        | 541.leela_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 548.exchange2_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:
-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

Peak Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -D_FILE_OFFSET_BITS=64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64

(Continued on next page)

Peak Portability Flags (Continued)

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs
-fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-fno-strict-overflow
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

502.gcc_r: -m32
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

505.mcf_r: basepeak = yes

525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

(Continued on next page)

Peak Optimization Flags (Continued)

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml
http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.3.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-29 19:24:52-0400.
Report generated on 2024-01-29 17:45:53 by CPU2017 PS formatter v6716.
Originally published on 2023-05-23.