SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

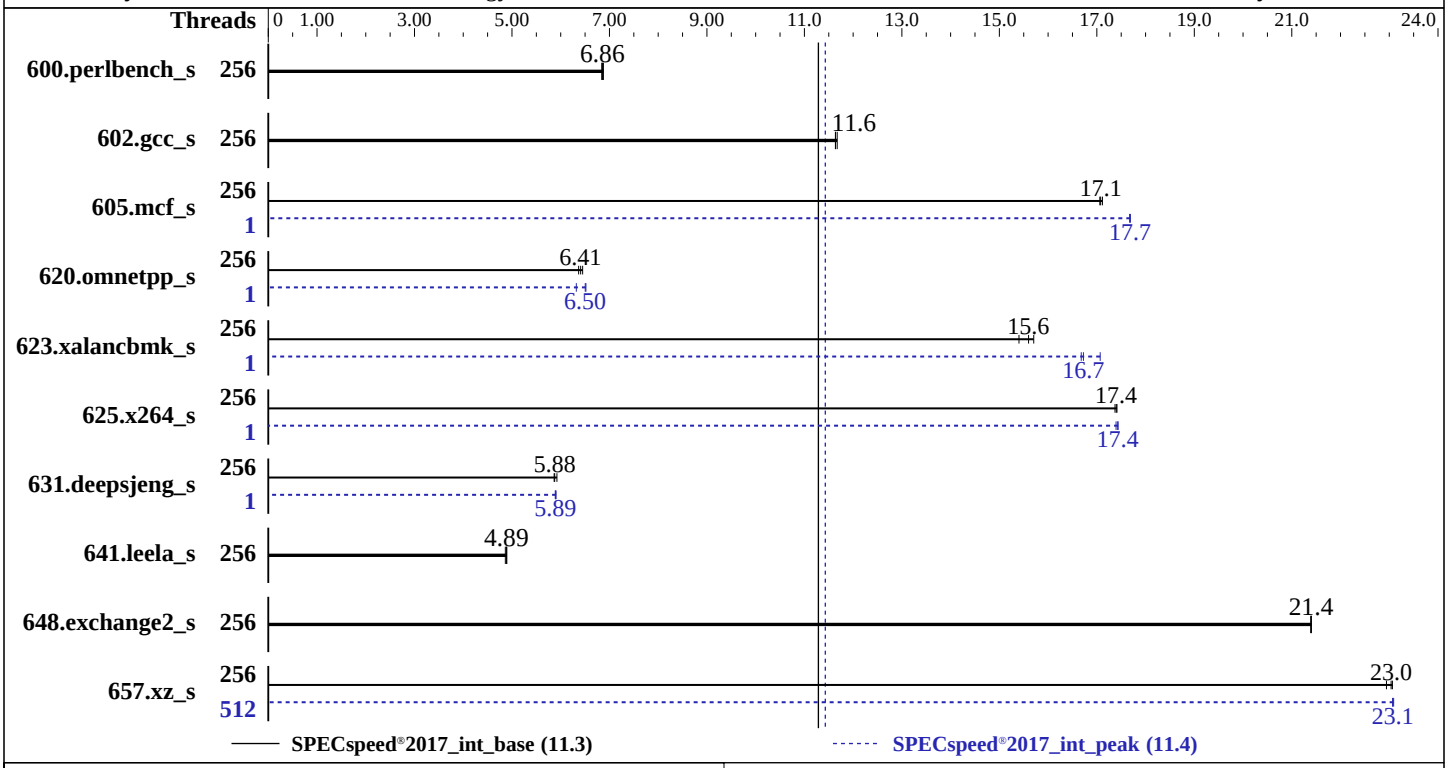

Hardware

CPU Name:	AMD EPYC 9754
Max MHz:	3100
Nominal:	2250
Enabled:	256 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	1 x 960 GB SATA SSD
Other:	None

Software

OS:	SUSE Linux Enterprise Server 15 SP4 (x86_64) Kernel 5.14.21-150400.22-default
Compiler:	C/C++/Fortran: Version 4.0.0 of AOCC
Parallel:	Yes
Firmware:	Lenovo BIOS Version KAE111J 2.10 released May-2023
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR665 V3
(2.25 GHz, AMD EPYC 9754)

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

CPU2017 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2023
Hardware Availability: Aug-2023
Software Availability: Nov-2022

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	256	259	6.84	258	6.88	**259**	**6.86**	256	259	6.84	258	6.88	**259**	**6.86**
602.gcc_s	256	**342**	**11.6**	341	11.7	342	11.6	256	**342**	**11.6**	341	11.7	342	11.6
605.mcf_s	256	276	17.1	277	17.1	**276**	**17.1**	1	**267**	**17.7**	267	17.7	267	17.7
620.omnetpp_s	256	253	6.45	**254**	**6.41**	256	6.37	1	250	6.52	**251**	**6.50**	258	6.32
623.xalancbmk_s	256	**90.8**	**15.6**	92.0	15.4	90.2	15.7	1	**84.7**	**16.7**	83.0	17.1	85.0	16.7
625.x264_s	256	102	17.4	101	17.4	**101**	**17.4**	1	**101**	**17.4**	101	17.4	101	17.4
631.deepsjeng_s	256	244	5.87	242	5.92	**244**	**5.88**	1	243	5.89	243	5.91	**243**	**5.89**
641.leela_s	256	349	4.89	351	4.86	**349**	**4.89**	256	349	4.89	351	4.86	**349**	**4.89**
648.exchange2_s	256	137	21.4	137	21.4	**137**	**21.4**	256	137	21.4	137	21.4	**137**	**21.4**
657.xz_s	256	269	22.9	268	23.1	**268**	**23.0**	512	268	23.1	268	23.1	**268**	**23.1**

SPECspeed®2017_int_base = 11.3

SPECspeed®2017_int_peak = 11.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-511"
LD_LIBRARY_PATH = "/home/cpu2017-1.1.9-amd-aocc400_znver4_A1/amd_speed_aocc400_znver4_A_lib/lib:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "oversize_threshold:0,retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "512"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 620.omnetpp_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 625.x264_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "15"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-511"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "8"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS configuration:
Operating Mode set to Maximum Performance and then set it to Custom Mode
NUMA Nodes per Socket set to NPS4

 Sysinfo program /home/cpu2017-1.1.9-amd-aocc400_znver4_A1/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on localhost Mon May 15 19:04:03 2023

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
```

(Continued on next page)

Platform Notes (Continued)

```
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
  x86_64 x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   19:04:03 up 4 min,  1 user,  load average: 0.29, 0.77, 0.43
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                19:00    1:30   1.32s  0.09s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  core file size          (blocks, -c) unlimited
  data seg size           (kbytes, -d) unlimited
  scheduling priority             (-e) 0
  file size               (blocks, -f) unlimited
  pending signals                 (-i) 6190570
  max locked memory       (kbytes, -l) 2097152
  max memory size         (kbytes, -m) unlimited
  open files                      (-n) 1024
  pipe size            (512 bytes, -p) 8
  POSIX message queues     (bytes, -q) 819200
  real-time priority              (-r) 0
  stack size              (kbytes, -s) unlimited
  cpu time               (seconds, -t) unlimited
  max user processes              (-u) 6190570
  virtual memory          (kbytes, -v) unlimited
  file locks                      (-x) unlimited

------------------------------------------------------------
5. sysinfo process ancestry
 /usr/lib/systemd/systemd --switched-root --system --deserialize 30
```

(Continued on next page)

Platform Notes (Continued)

```
 login -- root
 -bash
 /bin/bash ./run_SR665V3_bergamo_1.01.sh
 /bin/bash ./Run035-compliant-amd-speedint.sh
 python3 ./run_amd_speed_aocc400_znver4_A1.py
 /bin/bash ./amd_speed_aocc400_znver4_A1.sh
 runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 intspeed
 runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.066/templogs/preenv.intspeed.066.0.log --lognum 066.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-amd-aocc400_znver4_A1

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9754 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 2
    microcode       : 0xaa00208
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 3584 4K pages
    cpu cores       : 128
    siblings        : 256
    2 physical ids (chips)
    512 processors (hardware threads)
    physical id 0: core ids 0-127
    physical id 1: core ids 0-127
    physical id 0: apicids 0-255
    physical id 1: apicids 256-511
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.37.2:
  Architecture:                    x86_64
  CPU op-mode(s):                  32-bit, 64-bit
  Address sizes:                   52 bits physical, 57 bits virtual
  Byte Order:                      Little Endian
  CPU(s):                          512
  On-line CPU(s) list:             0-511
  Vendor ID:                       AuthenticAMD
  Model name:                      AMD EPYC 9754 128-Core Processor
  CPU family:                      25
  Model:                           160
  Thread(s) per core:              2
  Core(s) per socket:              128
  Socket(s):                       2
  Stepping:                        2
  Frequency boost:                 enabled
  CPU max MHz:                     3100.3411
  CPU min MHz:                     1500.0000
  BogoMIPS:                        4493.27
  Flags:                           fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                                   clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                                   constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf rapl
                                   pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
```

(Continued on next page)

Platform Notes (Continued)

```
                                popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                                abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                                perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_l3 cdp_l3
                                invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                                avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                                umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
  Virtualization:               AMD-V
  L1d cache:                    8 MiB (256 instances)
  L1i cache:                    8 MiB (256 instances)
  L2 cache:                     256 MiB (256 instances)
  L3 cache:                     512 MiB (32 instances)
  NUMA node(s):                 8
  NUMA node0 CPU(s):            0-31,256-287
  NUMA node1 CPU(s):            32-63,288-319
  NUMA node2 CPU(s):            64-95,320-351
  NUMA node3 CPU(s):            96-127,352-383
  NUMA node4 CPU(s):            128-159,384-415
  NUMA node5 CPU(s):            160-191,416-447
  NUMA node6 CPU(s):            192-223,448-479
  NUMA node7 CPU(s):            224-255,480-511
  Vulnerability Itlb multihit:  Not affected
  Vulnerability L1tf:           Not affected
  Vulnerability Mds:            Not affected
  Vulnerability Meltdown:       Not affected
  Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
  Vulnerability Spectre v1:     Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:     Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB
                                filling
  Vulnerability Srbds:          Not affected
  Vulnerability Tsx async abort: Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       8M    8 Data            1    64        1             64
     L1i       32K       8M    8 Instruction     1    64        1             64
     L2         1M     256M    8 Unified         2  2048        1             64
     L3        16M     512M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-31,256-287
  node 0 size: 193269 MB
  node 0 free: 192358 MB
  node 1 cpus: 32-63,288-319
  node 1 size: 193519 MB
  node 1 free: 192912 MB
  node 2 cpus: 64-95,320-351
  node 2 size: 193519 MB
  node 2 free: 193064 MB
  node 3 cpus: 96-127,352-383
  node 3 size: 193519 MB
  node 3 free: 193001 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 4 cpus: 128-159,384-415
  node 4 size: 193519 MB
  node 4 free: 192992 MB
  node 5 cpus: 160-191,416-447
  node 5 size: 193485 MB
  node 5 free: 192862 MB
  node 6 cpus: 192-223,448-479
  node 6 size: 193519 MB
  node 6 free: 193039 MB
  node 7 cpus: 224-255,480-511
  node 7 size: 193311 MB
  node 7 free: 192339 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584810532 kB

------------------------------------------------------------
10. who -r
  run-level 3 May 15 19:00

------------------------------------------------------------
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
  Default Target  Status
  multi-user      running

------------------------------------------------------------
12. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
                   issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog
                   smartd sshd wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
  enabled-runtime  systemd-remount-fs
  disabled         autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                   chronyd console-getty cups cups-browsed debug-shell ebtables exchange-bmc-os-info
                   firewalld gpm grub2-once haveged-switch-root hwloc-dump-hwdata ipmi ipmievd
                   issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rdisc
                   rpcbind rpmconfigcheck rsyncd sapconf serial-getty@ smartd_generate_opts snmpd snmptrapd
                   sysstat systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                   systemd-time-wait-sync systemd-timesyncd
  generated        ntp_sync
  indirect         uuidd wickedd

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=d602917c-fa5b-4f9c-b2fa-9b5cdd656491
  splash=silent
  mitigations=auto
  quiet
```

(Continued on next page)

Platform Notes (Continued)

```
  security=apparmor

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 15 SP4

------------------------------------------------------------
19. Disk information
SPEC is set to: /home/cpu2017-1.1.9-amd-aocc400_znver4_A1
  Filesystem     Type  Size  Used Avail Use% Mounted on
```

(Continued on next page)

Platform Notes (Continued)

```
  /dev/sda3      xfs   890G   24G  867G   3% /

 ------------------------------------------------------------
 20. /sys/devices/virtual/dmi/id
     Vendor:         Lenovo
     Product:        ThinkSystem SR665 V3 MB,Genoa,Kauai,DDR5,Kauai,2U
     Product Family: ThinkSystem
     Serial:         1234567890

 ------------------------------------------------------------
 21. dmidecode
   Additional information from dmidecode 3.2 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     5x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800
     4x Samsung M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
     4x Samsung M321R8GA0BB0-CQKMG 64 GB 2 rank 4800
     11x Samsung M321R8GA0BB0-CQKVG 64 GB 2 rank 4800


 ------------------------------------------------------------
 22. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      KAE111J-2.10
    BIOS Date:         05/11/2023
    BIOS Revision:     2.10
    Firmware Revision: 2.10
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)

Compiler Version Notes (Continued)

```
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lflang
-lamdalloc

C++ benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks (continued):
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-mllvm -unroll-threshold=100 -finline-aggressive
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver4 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Ofast -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

625.x264_s: Same as 605.mcf_s

657.xz_s: Same as 605.mcf_s

C++ benchmarks:

620.omnetpp_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

623.xalancbmk_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -finline-aggressive -mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc-ext -lflang

(Continued on next page)

Peak Optimization Flags (Continued)

631.deepsjeng_s: `-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp -flto -finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt -fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang`

641.leela_s: `basepeak = yes`

Fortran benchmarks:

648.exchange2_s: `basepeak = yes`

Peak Other Flags

C benchmarks:
`-Wno-return-type -Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc400-flags.html`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Bergamo-S.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc400-flags.xml`
`http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Bergamo-S.xml`

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-05-15 07:04:02-0400.
Report generated on 2023-06-13 15:16:27 by CPU2017 PS formatter v6716.
Originally published on 2023-06-13.