



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3


Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

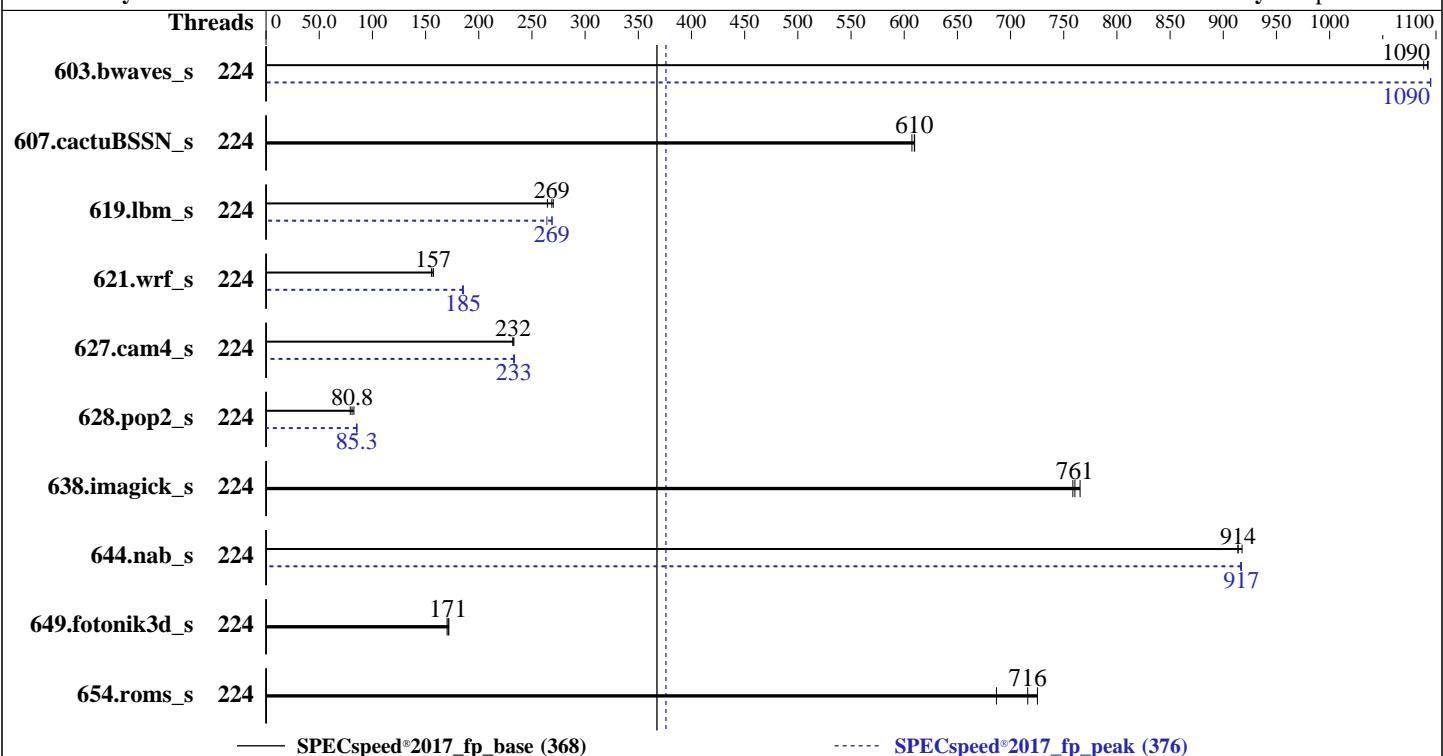

Hardware

CPU Name: AMD EPYC 9734
 Max MHz: 3000
 Nominal: 2200
 Enabled: 224 cores, 2 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 256 MB I+D on chip per chip,
 16 MB shared / 7 cores
 Other: None
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 480 GB SATA SSD
 Other: None

Software

OS: Red Hat Enterprise Linux 9.0 (Plow)
 Compiler: Kernel 5.14.0-70.13.1.el9_0.x86_64
 Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
 Firmware: Yes
 HPE BIOS Version v1.30 03/06/2023 released Mar-2023
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|-------------|-------------|-------------|-------------|-------------|------------|---------|-------------|-------------|-------------|------------|-------------|------------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 603.bwaves_s | 224 | 54.2 | 1090 | 54.0 | 1090 | 54.0 | 1090 | 224 | 53.9 | 1090 | 53.9 | 1090 | 53.9 | 1090 |
| 607.cactuBSSN_s | 224 | 27.5 | 607 | 27.3 | 610 | 27.3 | 610 | 224 | 27.5 | 607 | 27.3 | 610 | 27.3 | 610 |
| 619.lbm_s | 224 | 19.8 | 265 | 19.4 | 270 | 19.5 | 269 | 224 | 19.5 | 269 | 19.5 | 269 | 19.8 | 264 |
| 621.wrf_s | 224 | 84.1 | 157 | 85.0 | 156 | 84.2 | 157 | 224 | 71.4 | 185 | 71.3 | 185 | 71.6 | 185 |
| 627.cam4_s | 224 | 38.0 | 233 | 38.2 | 232 | 38.2 | 232 | 224 | 38.1 | 233 | 37.9 | 234 | 38.0 | 233 |
| 628.pop2_s | 224 | 147 | 80.8 | 150 | 79.2 | 144 | 82.6 | 224 | 139 | 85.3 | 139 | 85.4 | 139 | 85.2 |
| 638.imagick_s | 224 | 18.8 | 765 | 19.0 | 759 | 19.0 | 761 | 224 | 18.8 | 765 | 19.0 | 759 | 19.0 | 761 |
| 644.nab_s | 224 | 19.1 | 914 | 19.1 | 914 | 19.0 | 918 | 224 | 19.1 | 917 | 19.1 | 917 | 19.1 | 916 |
| 649.fotonik3d_s | 224 | 53.6 | 170 | 53.0 | 172 | 53.2 | 171 | 224 | 53.6 | 170 | 53.0 | 172 | 53.2 | 171 |
| 654.roms_s | 224 | 22.0 | 716 | 22.9 | 687 | 21.7 | 725 | 224 | 22.0 | 716 | 22.9 | 687 | 21.7 | 725 |

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
 To always enable THP for peak runs of:
 603.bwaves_s, 607.cactuBSSN_s, 619.lbm_s, 627.cam4_s, 628.pop2_s, 638.imagick_s, 644.nab_s, 649.fotonik3d_s:
 'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'
 run as root.
 To disable THP for peak runs of 621.wrf_s:

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Operating System Notes (Continued)

```
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

To enable THP only on request for peak runs of 654.roms_s:

```
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-223"  
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc400_znver4_A/lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "224"
```

Environment variables set by runcpu during the 603.bwaves_s peak run:
GOMP_CPU_AFFINITY = "0-223"

Environment variables set by runcpu during the 619.lbm_s peak run:
GOMP_CPU_AFFINITY = "0-223"

Environment variables set by runcpu during the 621.wrf_s peak run:
GOMP_CPU_AFFINITY = "0-223"

Environment variables set by runcpu during the 627.cam4_s peak run:
GOMP_CPU_AFFINITY = "0-223"

Environment variables set by runcpu during the 628.pop2_s peak run:
GOMP_CPU_AFFINITY = "0-223"

Environment variables set by runcpu during the 644.nab_s peak run:
GOMP_CPU_AFFINITY = "0-223"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS Configuration

Workload Profile set to General Peak Frequency Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

AMD SMT Option set to Disabled

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Platform Notes (Continued)

Last-Level Cache (LLC) as NUMA Node set to Enabled

ACPI CST C2 Latency set to 18 microseconds

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Power Regulator set to OS Control Mode

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost.localdomain Fri Jun 30 10:36:15 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.el9_0)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-70.13.1.el9_0.x86_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86_64
x86_64 x86_64 GNU/Linux

2. w
10:36:15 up 9 min, 2 users, load average: 0.15, 0.10, 0.08
USER TTY LOGIN@ IDLE JCPU PCPU WHAT
root tty1 26May22 400days 0.00s 0.00s -bash
root pts/0 26May22 15.00s 1.18s 0.05s /bin/bash ./amd_speed_aocc400_znver4_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

Platform Notes (Continued)

```

data seg size          (kbytes, -d) unlimited
scheduling priority   (-e) 0
file size             (blocks, -f) unlimited
pending signals       (-i) 6191102
max locked memory    (kbytes, -l) 2097152
max memory size      (kbytes, -m) unlimited
open files            (-n) 1024
pipe size              (512 bytes, -p) 8
POSIX message queues  (bytes, -q) 819200
real-time priority    (-r) 0
stack size             (kbytes, -s) unlimited
cpu time               (seconds, -t) unlimited
max user processes    (-u) 6191102
virtual memory         (kbytes, -v) unlimited
file locks             (-x) unlimited

```

5. sysinfo process ancestry

```

/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_fpspeed_znver4_A1.py
/bin/bash ./amd_speed_aocc400_znver4_A1.sh
runcpu --config amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 fpspeed
runcpu --configfile amd_speed_aocc400_znver4_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.013/templogs/preenv.fpspeed.013.0.log --lognum 013.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

```

6. /proc/cpuinfo

```

model name      : AMD EPYC 9734 112-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 160
stepping        : 2
bugs           : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores      : 112
siblings        : 112
2 physical ids (chips)
224 processors (hardware threads)
physical id 0: core ids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
physical id 1: core ids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
physical id 0: apicids
0-6,16-22,32-38,48-54,64-70,80-86,96-102,112-118,128-134,144-150,160-166,176-182,192-198,208-214,224-230,
240-246
physical id 1: apicids
256-262,272-278,288-294,304-310,320-326,336-342,352-358,368-374,384-390,400-406,416-422,432-438,448-454,4
64-470,480-486,496-502

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Platform Notes (Continued)

7. lscpu

From lscpu from util-linux 2.37.4:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Address sizes:        52 bits physical, 57 bits virtual
Byte Order:           Little Endian
CPU(s):               224
On-line CPU(s) list: 0-223
Vendor ID:            AuthenticAMD
BIOS Vendor ID:      Advanced Micro Devices, Inc.
Model name:           AMD EPYC 9734 112-Core Processor
BIOS Model name:     AMD EPYC 9734 112-Core Processor
CPU family:          25
Model:                160
Thread(s) per core:  1
Core(s) per socket:  112
Socket(s):           2
Stepping:             2
Frequency boost:    enabled
CPU max MHz:         2200.0000
CPU min MHz:         1500.0000
BogoMIPS:             4392.95
Flags:                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                      clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                      constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpf rapl
                      pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                      popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                      abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
                      perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
                      invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmil
                      avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                      avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                      xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbmb_total cqmq_mbmb_local
                      avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin arat npt lbrv
                      svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                      pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
                      umip pkru ospk avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                      avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
AMD-V
Virtualization:
L1d cache:          7 MiB (224 instances)
L1i cache:          7 MiB (224 instances)
L2 cache:           224 MiB (224 instances)
L3 cache:           512 MiB (32 instances)
NUMA node(s):        32
NUMA node0 CPU(s):   0-6
NUMA node1 CPU(s):   7-13
NUMA node2 CPU(s):   56-62
NUMA node3 CPU(s):   63-69
NUMA node4 CPU(s):   28-34
NUMA node5 CPU(s):   35-41
NUMA node6 CPU(s):   84-90
NUMA node7 CPU(s):   91-97
NUMA node8 CPU(s):   42-48
NUMA node9 CPU(s):   49-55
NUMA node10 CPU(s):  98-104
NUMA node11 CPU(s):  105-111
NUMA node12 CPU(s):  14-20
NUMA node13 CPU(s):  21-27
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

Platform Notes (Continued)

| | |
|----------------------------------|--|
| NUMA node14 CPU(s): | 70-76 |
| NUMA node15 CPU(s): | 77-83 |
| NUMA node16 CPU(s): | 112-118 |
| NUMA node17 CPU(s): | 119-125 |
| NUMA node18 CPU(s): | 168-174 |
| NUMA node19 CPU(s): | 175-181 |
| NUMA node20 CPU(s): | 140-146 |
| NUMA node21 CPU(s): | 147-153 |
| NUMA node22 CPU(s): | 196-202 |
| NUMA node23 CPU(s): | 203-209 |
| NUMA node24 CPU(s): | 154-160 |
| NUMA node25 CPU(s): | 161-167 |
| NUMA node26 CPU(s): | 210-216 |
| NUMA node27 CPU(s): | 217-223 |
| NUMA node28 CPU(s): | 126-132 |
| NUMA node29 CPU(s): | 133-139 |
| NUMA node30 CPU(s): | 182-188 |
| NUMA node31 CPU(s): | 189-195 |
| Vulnerability Itlb multihit: | Not affected |
| Vulnerability Llft: | Not affected |
| Vulnerability Mds: | Not affected |
| Vulnerability Meltdown: | Not affected |
| Vulnerability Spec store bypass: | Mitigation; Speculative Store Bypass disabled via prctl |
| Vulnerability Spectre v1: | Mitigation; usercopy/swaps barriers and __user pointer sanitization |
| Vulnerability Spectre v2: | Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling |
| Vulnerability Srbds: | Not affected |
| Vulnerability Tsx async abort: | Not affected |

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE | LEVEL | SETS | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|-------|----------|----------------|
| L1d | 32K | 7M | 8 | Data | 1 | 64 | 1 | 64 |
| L1i | 32K | 7M | 8 | Instruction | 1 | 64 | 1 | 64 |
| L2 | 1M | 224M | 8 | Unified | 2 | 2048 | 1 | 64 |
| L3 | 16M | 512M | 16 | Unified | 3 | 16384 | 1 | 64 |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 32 nodes (0-31)

node 0 cpus: 0-6

node 0 size: 48136 MB

node 0 free: 47976 MB

node 1 cpus: 7-13

node 1 size: 48382 MB

node 1 free: 48259 MB

node 2 cpus: 56-62

node 2 size: 48382 MB

node 2 free: 48242 MB

node 3 cpus: 63-69

node 3 size: 48382 MB

node 3 free: 48266 MB

node 4 cpus: 28-34

node 4 size: 48382 MB

node 4 free: 48174 MB

node 5 cpus: 35-41

node 5 size: 48382 MB

node 5 free: 48227 MB

node 6 cpus: 84-90

node 6 size: 48382 MB

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Platform Notes (Continued)

```
node 6 free: 48223 MB
node 7 cpus: 91-97
node 7 size: 48382 MB
node 7 free: 48283 MB
node 8 cpus: 42-48
node 8 size: 48382 MB
node 8 free: 48238 MB
node 9 cpus: 49-55
node 9 size: 48382 MB
node 9 free: 48245 MB
node 10 cpus: 98-104
node 10 size: 48382 MB
node 10 free: 48247 MB
node 11 cpus: 105-111
node 11 size: 48382 MB
node 11 free: 48227 MB
node 12 cpus: 14-20
node 12 size: 48382 MB
node 12 free: 48244 MB
node 13 cpus: 21-27
node 13 size: 48382 MB
node 13 free: 48240 MB
node 14 cpus: 70-76
node 14 size: 48382 MB
node 14 free: 48267 MB
node 15 cpus: 77-83
node 15 size: 48382 MB
node 15 free: 48233 MB
node 16 cpus: 112-118
node 16 size: 48382 MB
node 16 free: 48156 MB
node 17 cpus: 119-125
node 17 size: 48382 MB
node 17 free: 48241 MB
node 18 cpus: 168-174
node 18 size: 48382 MB
node 18 free: 48240 MB
node 19 cpus: 175-181
node 19 size: 48382 MB
node 19 free: 48226 MB
node 20 cpus: 140-146
node 20 size: 48382 MB
node 20 free: 48221 MB
node 21 cpus: 147-153
node 21 size: 48382 MB
node 21 free: 48212 MB
node 22 cpus: 196-202
node 22 size: 48382 MB
node 22 free: 48241 MB
node 23 cpus: 203-209
node 23 size: 48382 MB
node 23 free: 48221 MB
node 24 cpus: 154-160
node 24 size: 48382 MB
node 24 free: 48065 MB
node 25 cpus: 161-167
node 25 size: 48382 MB
node 25 free: 48238 MB
node 26 cpus: 210-216
node 26 size: 48382 MB
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

Platform Notes (Continued)

```
node 26 free: 48151 MB
node 27 cpus: 217-223
node 27 size: 48309 MB
node 27 free: 48167 MB
node 28 cpus: 126-132
node 28 size: 48382 MB
node 28 free: 48205 MB
node 29 cpus: 133-139
node 29 size: 48382 MB
node 29 free: 48170 MB
node 30 cpus: 182-188
node 30 size: 48382 MB
node 30 free: 48259 MB
node 31 cpus: 189-195
node 31 size: 48345 MB
node 31 free: 48057 MB
node distances:
node  0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15  16  17  18  19  20  21  22  23  24
25  26  27  28  29  30  31
  0: 10  11  11  11  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  1: 11  10  11  11  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  2: 11  11  10  11  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  3: 11  11  11  10  11  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  4: 11  11  11  11  10  11  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  5: 11  11  11  11  11  10  11  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  6: 11  11  11  11  11  11  10  11  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  7: 11  11  11  11  11  11  11  10  11  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  8: 11  11  11  11  11  11  11  11  10  11  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
  9: 11  11  11  11  11  11  11  11  11  10  11  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
 10: 11  11  11  11  11  11  11  11  11  11  10  11  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
 11: 11  11  11  11  11  11  11  11  11  11  11  10  11  11  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
 12: 11  11  11  11  11  11  11  11  11  11  11  11  11  10  11  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
 13: 11  11  11  11  11  11  11  11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
 14: 11  11  11  11  11  11  11  11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
 15: 11  11  11  11  11  11  11  11  11  11  11  11  11  11  10  32  32  32  32  32  32  32  32  32
    32  32  32  32  32  32
 16: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
    11  11  11  11  11  11
 17: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
    11  11  11  11  11  11
 18: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
    11  11  11  11  11  11
 19: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
    11  11  11  11  11  11
 20: 32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32  32
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

PIEZOart DES355 GEMI I
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Date: Jun-2023

Test Sponsor: HPE

Hardware Availability: Sep-2023

Tested by: HPE

Software Availability: Apr-2023

Platform Notes (Continued)

```

11 11 11 11 11 11 11
21: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 10 11 11 11
11 11 11 11 11 11 11
22: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11 11
11 11 11 11 11 11
23: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 10 11 11
11 11 11 11 11 11
24: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 10
11 11 11 11 11 11
25: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
10 11 11 11 11 11
26: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 10 11 11 11 11
27: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 10 11 11 11
28: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 10 11 11
29: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 10 11
30: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 11 10
31: 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 32 11 11 11 11 11 11 11 11
11 11 11 11 11 10

```

9. /proc/meminfo
MemTotal: 1585029248 kB

10. who -r
run-level 3 May 26 06:54

```
11. Systemd service manager version: systemd 250 (250-6.el9_0)
    Default Target      Status
    multi-user          running
```

```
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited chronyd crond
                dbus-broker firewalld getty@ irqbalance kdump lvm2-monitor mdmonitor microcode
                nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sshd sssd
                systemd-network-generator tuned udisks2
enabled-runtime    systemd-remount-fs
disabled       blk-availability chrony-wait console-getty cpupower debug-shell hwloc-dump-hwdata kvm_stat
                man-db-restart-cache-update nftables powertop rdisc rhsm rhsm-facts rpmbuild-rebuild
                serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysext
                target targetclid
indirect       sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
```

```
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd2,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=/dev/mapper/rhel-root
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Platform Notes (Continued)

```
-----  
14. cpupower frequency-info  
analyzing CPU 0:  
    current policy: frequency should be within 1.50 GHz and 2.20 GHz.  
        The governor "performance" may decide which speed to use  
        within this range.  
    boost state support:  
        Supported: yes  
        Active: yes  
        Boost States: 0  
        Total States: 3  
        Pstate-P0: 2200MHz
```

```
-----  
15. tuned-adm active  
Current active profile: throughput-performance
```

```
-----  
16. sysctl  
kernel.numa_balancing          1  
kernel.randomize_va_space       0  
vm.compaction_proactiveness   20  
vm.dirty_background_bytes      0  
vm.dirty_background_ratio     10  
vm.dirty_bytes                 0  
vm.dirty_expire_centisecs    3000  
vm.dirty_ratio                 8  
vm.dirty_writeback_centisecs  500  
vm.dirtytime_expire_seconds   43200  
vm.extfrag_threshold          500  
vm.min_unmapped_ratio         1  
vm.nr_hugepages                0  
vm.nr_hugepages_mempolicy      0  
vm.nr_overcommit_hugepages     0  
vm.swappiness                  1  
vm.watermark_boost_factor     15000  
vm.watermark_scale_factor      10  
vm.zone_reclaim_mode           1
```

```
-----  
17. /sys/kernel/mm/transparent_hugepage  
defrag          [always] defer defer+madvise madvise never  
enabled         [always] madvise never  
hpage_pmd_size 2097152  
shmem_enabled   always within_size advise [never] deny force
```

```
-----  
18. /sys/kernel/mm/transparent_hugepage/khugepaged  
alloc_sleep_millisecs   60000  
defrag                  1  
max_ptes_none           511  
max_ptes_shared          256  
max_ptes_swap            64  
pages_to_scan            4096  
scan_sleep_millisecs    10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release      Red Hat Enterprise Linux 9.0 (Plow)
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Platform Notes (Continued)

```
redhat-release Red Hat Enterprise Linux release 9.0 (Plow)
system-release Red Hat Enterprise Linux release 9.0 (Plow)
```

20. Disk information

SPEC is set to: /home/cpu2017

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|-----------------------|------|------|------|-------|------|------------|
| /dev/mapper/rhel-home | xfs | 372G | 18G | 354G | 5% | /home |

21. /sys/devices/virtual/dmi/id

| Vendor: | HPE |
|-----------------|----------------------|
| Product: | ProLiant DL385 Gen11 |
| Product Family: | ProLiant |
| Serial: | DL385G11-006 |

22. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

| BIOS Vendor: | HPE |
|--------------------|------------|
| BIOS Version: | 1.30 |
| BIOS Date: | 03/06/2023 |
| BIOS Revision: | 1.30 |
| Firmware Revision: | 1.10 |

Compiler Version Notes

```
=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak) 644.nab_s(base, peak)
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----
```

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----
```

```
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin
-----
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran | 603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak) 654.roms_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

=====
Fortran, C | 621.wrf_s(base, peak) 627.cam4_s(base, peak) 628.pop2_s(base, peak)
=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#434 2022_10_28) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-4.0.0/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

Base Portability Flags

603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Base Portability Flags (Continued)

638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang
```

Benchmarks using both Fortran and C:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

Benchmarks using Fortran, C, and C++:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-flang
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

Fortran benchmarks:

```
flang
```

Benchmarks using both Fortran and C:

```
flang clang
```

Benchmarks using Fortran, C, and C++:

```
clang++ clang flang
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11
(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

```
638.imagick_s: basepeak = yes
```

```
644.nab_s: -m64 -Wl,-mllvm -Wl,-region-vectorize -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-fopenmp=libomp -lomp -lamdlibm -lamdaloc -lflang
```

Fortran benchmarks:

```
603.bwaves_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC_OPENMP
-Ofast -march=znver4 -fveclib=AMDLIBM -ffast-math
-fopenmp -Mrecursive -mllvm -reduce-array-computations=3
-fvector-transform -fscalar-transform -fopenmp=libomp
-lomp -lamdlibm -lamdaloc -lflang
```

```
649.fotonik3d_s: basepeak = yes
```

```
654.roms_s: basepeak = yes
```

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-O3 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop
```

(Continued on next page)



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

Peak Optimization Flags (Continued)

621.wrf_s (continued):

```
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

```
627.cam4_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fopenmp=libomp -lomp -lamdlibm -lamdalloc
-lflang
```

```
628.pop2_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver4 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -fstruct-layout=9 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -zopt
-Mrecursive -fvector-transform -fscalar-transform
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang
```

Benchmarks using Fortran, C, and C++:

607.cactuBSSN_s: basepeak = yes

Peak Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```



SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen11

(2.20 GHz, AMD EPYC 9734)

SPECspeed®2017_fp_base = 368

SPECspeed®2017_fp_peak = 376

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jun-2023

Hardware Availability: Sep-2023

Software Availability: Apr-2023

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.html>

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Bergamo-rev1.0.xml>

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-30 01:06:15-0400.

Report generated on 2023-07-19 16:29:32 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.