



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017\_int\_base = 1340

SPECrate®2017\_int\_peak = 1390

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

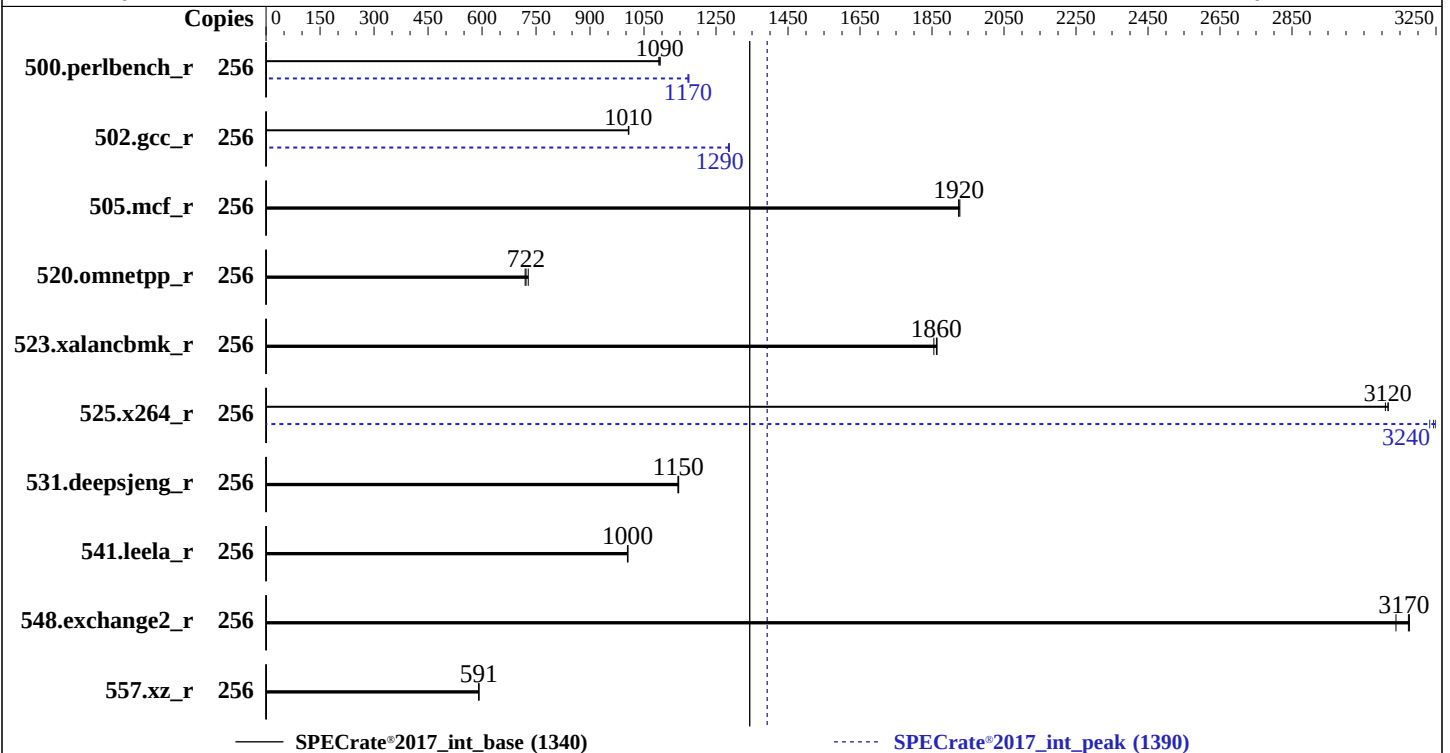

## Hardware

CPU Name: Intel Xeon 6767P  
Max MHz: 3900  
Nominal: 2400  
Enabled: 128 cores, 2 chips, 2 threads/core  
Orderable: 1,2 chips  
Cache L1: 64 KB I + 48 KB D on chip per core  
L2: 2 MB I+D on chip per core  
L3: 336 MB I+D on chip per chip  
Other: None  
Memory: 512 GB (16 x 32 GB 2Rx8 PC5-6400B-R)  
Storage: 1 x 3.2 TB NVMe SSD  
Other: CPU Cooling: Air

## Software

OS: SUSE Linux Enterprise Server 15 SP6  
Kernel 6.4.0-150600.21-default  
Compiler: C/C++: Version 2024.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
Fortran: Version 2024.1 of Intel Fortran Compiler for Linux;  
Parallel: No  
Firmware: HPE BIOS Version v1.20 02/14/2025 released Feb-2025  
File System: btrfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc memory allocator V5.0.1  
Power Management: BIOS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017\_int\_base = 1340

SPECrate®2017\_int\_peak = 1390

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Results Table

| Benchmark       | Base   |                   |                    |                   |                    |                   |                    | Peak   |                   |                    |                   |                    |                   |                    |
|-----------------|--------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|--------|-------------------|--------------------|-------------------|--------------------|-------------------|--------------------|
|                 | Copies | Seconds           | Ratio              | Seconds           | Ratio              | Seconds           | Ratio              | Copies | Seconds           | Ratio              | Seconds           | Ratio              | Seconds           | Ratio              |
| 500.perlbench_r | 256    | 372               | 1090               | 374               | 1090               | <b><u>373</u></b> | <b><u>1090</u></b> | 256    | <b><u>348</u></b> | <b><u>1170</u></b> | 348               | 1170               | 347               | 1170               |
| 502.gcc_r       | 256    | <b><u>360</u></b> | <b><u>1010</u></b> | 360               | 1010               | 360               | 1010               | 256    | 282               | 1290               | <b><u>282</u></b> | <b><u>1290</u></b> | 282               | 1280               |
| 505.mcf_r       | 256    | 215               | 1930               | <b><u>215</u></b> | <b><u>1920</u></b> | 215               | 1920               | 256    | 215               | 1930               | <b><u>215</u></b> | <b><u>1920</u></b> | 215               | 1920               |
| 520.omnetpp_r   | 256    | 467               | 720                | 461               | 728                | <b><u>465</u></b> | <b><u>722</u></b>  | 256    | 467               | 720                | 461               | 728                | <b><u>465</u></b> | <b><u>722</u></b>  |
| 523.xalancbmk_r | 256    | 145               | 1860               | 146               | 1860               | <b><u>145</u></b> | <b><u>1860</u></b> | 256    | 145               | 1860               | 146               | 1860               | <b><u>145</u></b> | <b><u>1860</u></b> |
| 525.x264_r      | 256    | <b><u>144</u></b> | <b><u>3120</u></b> | 144               | 3110               | 144               | 3120               | 256    | 138               | 3250               | <b><u>138</u></b> | <b><u>3240</u></b> | 139               | 3230               |
| 531.deepsjeng_r | 256    | <b><u>256</u></b> | <b><u>1150</u></b> | 256               | 1140               | 256               | 1150               | 256    | <b><u>256</u></b> | <b><u>1150</u></b> | 256               | 1140               | 256               | 1150               |
| 541.leela_r     | 256    | 422               | 1000               | <b><u>422</u></b> | <b><u>1000</u></b> | 422               | 1010               | 256    | 422               | 1000               | <b><u>422</u></b> | <b><u>1000</u></b> | 422               | 1010               |
| 548.exchange2_r | 256    | <b><u>211</u></b> | <b><u>3170</u></b> | 211               | 3180               | 214               | 3140               | 256    | <b><u>211</u></b> | <b><u>3170</u></b> | 211               | 3180               | 214               | 3140               |
| 557.xz_r        | 256    | <b><u>468</u></b> | <b><u>591</u></b>  | 468               | 591                | 468               | 591                | 256    | <b><u>468</u></b> | <b><u>591</u></b>  | 468               | 591                | 468               | 591                |

SPECrate®2017\_int\_base = 1340

SPECrate®2017\_int\_peak = 1390

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
tuned-adm profile was stopped using "systemctl stop tuned"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOCONF = "retain:true"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.40 GHz, Intel Xeon 6767P)

**SPECrate®2017\_int\_base = 1340**

**SPECrate®2017\_int\_peak = 1390**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## General Notes (Continued)

is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:  
Workload Profile set to General Throughput Compute  
Enhanced Processor Performance Profile set to Aggressive  
Thermal Configuration set to Maximum Cooling  
Memory Patrol Scrubbing set to Disabled  
Last Level Cache (LLC) Prefetch set to Enabled  
XPT Prefetch set to Disabled  
Intel UPI Prefetch set to disabled  
Workload Profile set to Custom  
DCU Stream Prefetcher set to Disabled  
Adjacent Sector Prefetch set to Disabled

Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost Thu Mar 13 01:27:28 2025

SUT (System Under Test) info as seen by some common utilities.

### Table of contents

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 
1. uname -a  
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT\_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36c1e09)  
x86\_64 x86\_64 x86\_64 GNU/Linux

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.40 GHz, Intel Xeon 6767P)

**SPECrate®2017\_int\_base = 1340**

**SPECrate®2017\_int\_peak = 1390**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

2. w

01:27:28 up 2 min, 4 users, load average: 0.21, 0.19, 0.08  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT

3. Username

From environment variable \$USER: root

4. ulimit -a

core file size (blocks, -c) unlimited  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 2062434  
max locked memory (kbytes, -l) 8192  
max memory size (kbytes, -m) unlimited  
open files (-n) 1024  
pipe size (512 bytes, -p) 8  
POSIX message queues (bytes, -q) 819200  
real-time priority (-r) 0  
stack size (kbytes, -s) unlimited  
cpu time (seconds, -t) unlimited  
max user processes (-u) 2062434  
virtual memory (kbytes, -v) unlimited  
file locks (-x) unlimited

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@notty
bash -c cd $SPEC/ && $SPEC/intrate_spr.sh
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 -c
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=256 --configfile
ic2024.1-lin-sapphirerapids-rate-20240308.cfg --define smt-on --define cores=128 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/temlogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

6. /proc/cpuinfo

model name : Intel(R) Xeon(R) 6767P  
vendor\_id : GenuineIntel  
cpu family : 6  
model : 173  
stepping : 1  
microcode : 0x1000380  
bugs : spectre\_v1 spectre\_v2 spec\_store\_bypass swapgs bhi  
cpu cores : 64  
siblings : 128  
2 physical ids (chips)  
256 processors (hardware threads)  
physical id 0: core ids 0-31,64-95  
physical id 1: core ids 0-31,64-95

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017\_int\_base = 1340

SPECrate®2017\_int\_peak = 1390

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

physical id 0: apicids 0-63,128-191

physical id 1: apicids 256-319,384-447

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

-----  
7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:                x86_64
CPU op-mode(s):              32-bit, 64-bit
Address sizes:               46 bits physical, 57 bits virtual
Byte Order:                  Little Endian
CPU(s):                      256
On-line CPU(s) list:        0-255
Vendor ID:                   GenuineIntel
BIOS Vendor ID:              Intel(R) Corporation
Model name:                  Intel(R) Xeon(R) 6767P
BIOS Model name:             Intel(R) Xeon(R) 6767P  CPU @ 2.4GHz
BIOS CPU family:             179
CPU family:                  6
Model:                       173
Thread(s) per core:         2
Core(s) per socket:         64
Socket(s):                   2
Stepping:                    1
BogoMIPS:                    4800.00
Flags:                        fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                             pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                             pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                             nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                             pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                             xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
                             tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
                             3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2
                             ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow flexpriority ept
                             vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                             rtm cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                             clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                             xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                             split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm ida
                             arat pln pts hfi vnmi avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                             gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
                             la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd frsm
                             md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16 avx512_fp16
                             amx_tile amx_int8 flush_l1d arch_capabilities
Virtualization:              VT-x
L1d cache:                   6 MiB (128 instances)
L1i cache:                   8 MiB (128 instances)
L2 cache:                    256 MiB (128 instances)
L3 cache:                    672 MiB (2 instances)
NUMA node(s):                4
NUMA node0 CPU(s):           0-31,128-159
NUMA node1 CPU(s):           32-63,160-191
NUMA node2 CPU(s):           64-95,192-223
NUMA node3 CPU(s):           96-127,224-255
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit:    Not affected
Vulnerability L1tf:            Not affected
Vulnerability Mds:             Not affected
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017\_int\_base = 1340

SPECrate®2017\_int\_peak = 1390

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

Vulnerability Meltdown: Not affected  
Vulnerability Mmio stale data: Not affected  
Vulnerability Reg file data sampling: Not affected  
Vulnerability Retbleed: Not affected  
Vulnerability Spec rstack overflow: Not affected  
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl  
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization  
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; RSB filling; PBRSE-eIBRS Not affected; BHI BHI\_DIS\_S  
Vulnerability Srbds: Not affected  
Vulnerability Tsx async abort: Not affected

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS   | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d  | 48K      | 6M       | 12   | Data        | 1     | 64     | 1        | 64             |
| L1i  | 64K      | 8M       | 16   | Instruction | 1     | 64     | 1        | 64             |
| L2   | 2M       | 256M     | 16   | Unified     | 2     | 2048   | 1        | 64             |
| L3   | 336M     | 672M     | 16   | Unified     | 3     | 344064 | 1        | 64             |

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0-31,128-159  
node 0 size: 128695 MB  
node 0 free: 127541 MB  
node 1 cpus: 32-63,160-191  
node 1 size: 129007 MB  
node 1 free: 127655 MB  
node 2 cpus: 64-95,192-223  
node 2 size: 129007 MB  
node 2 free: 128451 MB  
node 3 cpus: 96-127,224-255  
node 3 size: 128929 MB  
node 3 free: 128340 MB  
node distances:  
node 0 1 2 3  
0: 10 12 21 21  
1: 12 10 21 21  
2: 21 21 10 12  
3: 21 21 12 10

9. /proc/meminfo

MemTotal: 528014380 kB

10. who -r

run-level 3 Mar 13 01:25

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status  
multi-user running

12. Services, from systemctl list-unit-files

| STATE   | UNIT FILES                                                                                                                                                             |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| enabled | ModemManager YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog |

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.40 GHz, Intel Xeon 6767P)

**SPECrate®2017\_int\_base = 1340**

**SPECrate®2017\_int\_peak = 1390**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Platform Notes (Continued)

enabled-runtime disabled indirect

lvm2-monitor nsd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wicked  
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa\_supplicant  
systemd-remount-fs  
NetworkManager NetworkManager-dispatcher NetworkManager-wait-online accounts-daemon autofs  
autostart-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates  
chrony-wait chronyd console-getty cups cups-browsed debug-shell dnsmasq ebttables  
exchange-bmc-os-info firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmiev  
issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@  
ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@  
smartd\_generate\_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures  
systemd-confext systemd-network-generator systemd-sysex systemd-time-wait-sync  
systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wpa\_supplicant@  
pcscd saned@ systemd-userdbd wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default  
root=UUID=4461ad3b-5550-46a9-a453-c296e0e04d21  
splash=silent  
resume=/dev/disk/by-uuid/930cc1e7-2c0e-48d3-84ad-33c84ff87515  
mitigations=auto  
quiet  
security=apparmor

-----  
14. cpupower frequency-info  
analyzing CPU 2:  
Unable to determine current policy  
boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
It seems that tuned daemon is not running, preset profile is not activated.  
Preset profile: balanced

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0  
-----

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017\_int\_base = 1340

SPECrate®2017\_int\_peak = 1390

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Platform Notes (Continued)

17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer defer+madvice [madvice] never  
enabled [always] madvice never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_shared 256  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

19. OS release  
From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

20. Disk information  
SPEC is set to: /home/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 btrfs 1.9T 749G 1.2T 39% /home

21. /sys/devices/virtual/dmi/id  
Vendor: HPE  
Product: HPE ProLiant Compute DL380 Gen12  
Product Family: ProLiant  
Serial: CNXD1M02CD

22. dmidecode  
Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Micron MTC20F2085S1RC64BD2 QSFF 32 GB 2 rank 6400

23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: HPE  
BIOS Version: 1.20  
BIOS Date: 02/14/2025  
BIOS Revision: 1.20  
Firmware Revision: 1.11

## Compiler Version Notes

C | 502.gcc\_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.40 GHz, Intel Xeon 6767P)

**SPECrate®2017\_int\_base = 1340**

**SPECrate®2017\_int\_peak = 1390**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Compiler Version Notes (Continued)

Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====
C      | 502.gcc_r(peak)
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====
C++    | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
=====
```

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2024.1.0 Build 20240308  
Copyright (C) 1985-2024 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.40 GHz, Intel Xeon 6767P)

**SPECrate®2017\_int\_base = 1340**

**SPECrate®2017\_int\_peak = 1390**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmalloc

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant Compute DL380 Gen12

(2.40 GHz, Intel Xeon 6767P)

SPECrate®2017\_int\_base = 1340

SPECrate®2017\_int\_peak = 1390

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Mar-2025

Hardware Availability: Mar-2025

Software Availability: Jun-2024

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w -std=c11 -m64 -Wl, -z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

502.gcc\_r: -m32 -L/opt/intel/oneapi/compiler/2024.1/lib32 -std=gnu89  
-Wl, -z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profddata(pass 2) -xCORE-AVX2(pass 1)  
-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse  
-funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/jemalloc32-5.0.1/lib -ljemallo

505.mcf\_r: basepeak = yes

525.x264\_r: -w -std=c11 -m64 -Wl, -z,muldefs -xsapphirerapids -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/opt/intel/oneapi/compiler/2024.1/lib -lqkmallo

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**Hewlett Packard Enterprise**

(Test Sponsor: HPE)

**ProLiant Compute DL380 Gen12**

(2.40 GHz, Intel Xeon 6767P)

**SPECrate®2017\_int\_base = 1340**

**SPECrate®2017\_int\_peak = 1390**

**CPU2017 License:** 3

**Test Sponsor:** HPE

**Tested by:** HPE

**Test Date:** Mar-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Jun-2024

## Peak Optimization Flags (Continued)

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.html>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-GNR-rev1.1.xml>

<http://www.spec.org/cpu2017/flags/Intel-ic2024-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-12 15:57:28-0400.

Report generated on 2025-04-09 14:56:37 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.