



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECSspeed®2017_int_base = 16.2

SPECSspeed®2017_int_peak = 16.4

CPU2017 License: 6488


Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

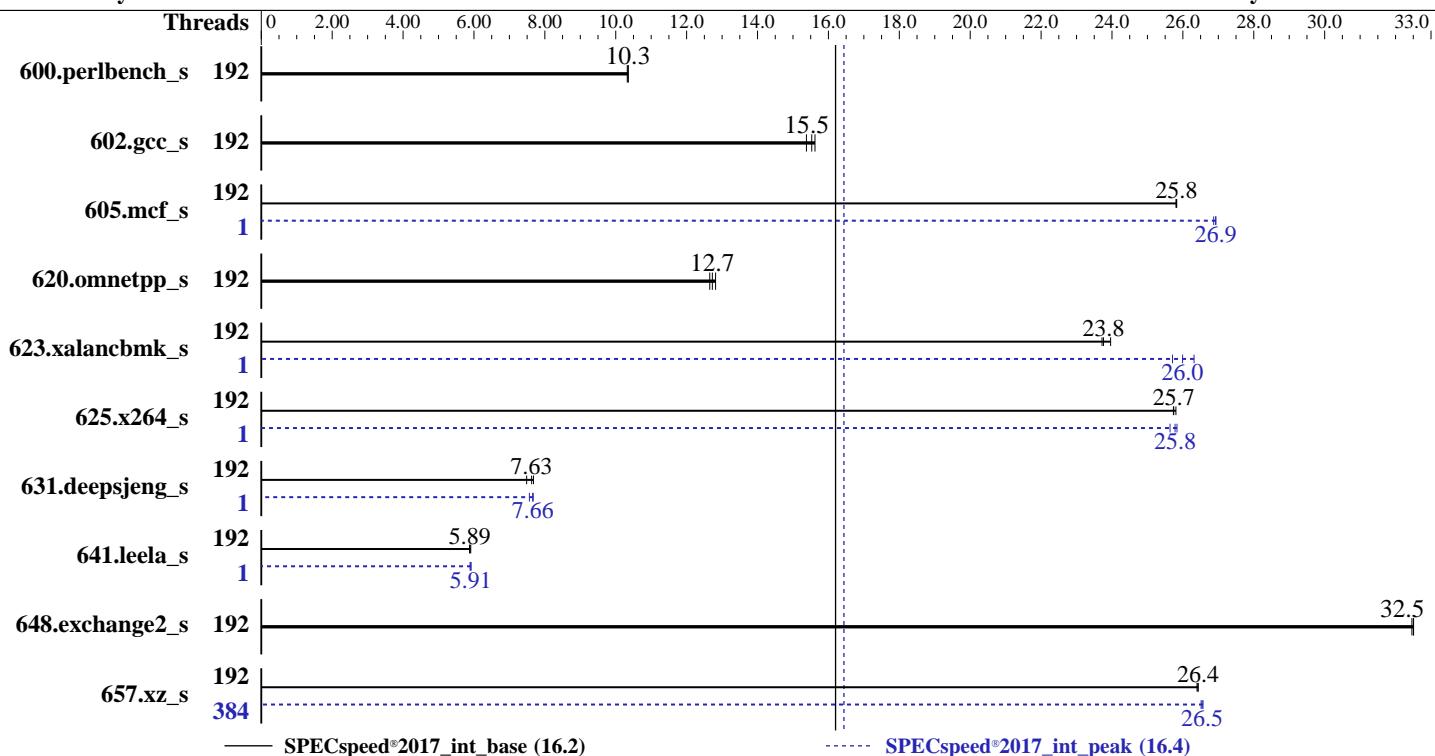

Hardware		Software	
CPU Name:	AMD EPYC 9965	OS:	Red Hat Enterprise Linux release 9.4 (Plow) kernel version 5.14.0-427.13.1.el9_4.x86_64
Max MHz:	3700	Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Nominal:	2250	Parallel:	Yes
Enabled:	192 cores, 1 chip, 2 threads/core	Firmware:	Version 00.13.01.07 released Feb-2025
Orderable:	1 chip	File System:	xfs
Cache L1:	32 KB I + 48 KB D on chip per core	System State:	Run level 3 (multi-user)
L2:	1 MB I+D on chip per core	Base Pointers:	64-bit
L3:	384 MB I+D on chip per chip, 32 MB shared / 16 cores	Peak Pointers:	64-bit
Other:	None	Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)	Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage
Storage:	1 x 1.6 TB PCIe NVMe SSD		
Other:	CPU Cooling: Air		



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	192	172	10.3	171	10.4	<u>172</u>	<u>10.3</u>	192	172	10.3	171	10.4	<u>172</u>	<u>10.3</u>
602.gcc_s	192	256	15.5	259	15.4	255	15.6	192	256	15.5	259	15.4	255	15.6
605.mcf_s	192	183	25.8	183	25.8	183	25.8	1	176	26.9	175	26.9	175	26.9
620.omnetpp_s	192	129	12.7	127	12.8	<u>128</u>	<u>12.7</u>	192	129	12.7	127	12.8	<u>128</u>	<u>12.7</u>
623.xalancbmk_s	192	59.6	23.8	59.7	23.7	59.1	24.0	1	55.1	25.7	53.8	26.3	54.5	26.0
625.x264_s	192	68.4	25.8	68.5	25.7	68.5	25.7	1	68.4	25.8	68.3	25.8	68.8	25.6
631.deepsjeng_s	192	187	7.68	191	7.49	<u>188</u>	<u>7.63</u>	1	187	7.66	187	7.67	189	7.56
641.leela_s	192	290	5.89	290	5.87	289	5.91	1	289	5.91	290	5.89	288	5.92
648.exchange2_s	192	90.5	32.5	90.4	32.5	90.6	32.5	192	90.5	32.5	90.4	32.5	90.6	32.5
657.xz_s	192	234	26.4	234	26.4	<u>234</u>	<u>26.4</u>	384	<u>233</u>	<u>26.5</u>	233	26.5	233	26.6
SPECspeed®2017_int_base = 16.2														
SPECspeed®2017_int_peak = 16.4														

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-383"  
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_speed_aocc500_znver5_A/lib:/home/cpu2017/amd_speed_aocc500_znver5_A/lib/lib32:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "384"
```

Environment variables set by runcpu during the 605.mcf_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 623.xalancbmk_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 625.x264_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 631.deepsjeng_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 641.leela_s peak run:

```
GOMP_CPU_AFFINITY = "0"
```

Environment variables set by runcpu during the 657.xz_s peak run:

```
GOMP_CPU_AFFINITY = "0-383"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS settings:

```
Determinism Control = Manual  
Determinism Enable = Power  
TDP Control = Manual  
TDP = 500  
PPT Control = Manual  
PPT = 500  
NUMA Nodes Per Socket = Auto  
ACPI SRAT L3 Cache As NUMA Domain = Enable
```

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Mar 17 10:52:51 2025
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 252 (252-32.el9_4)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. tuned-adm active
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS

1. uname -a
Linux localhost.localdomain 5.14.0-427.13.1.el9_4.x86_64 #1 SMP PREEMPT_DYNAMIC Wed Apr 10 10:29:16 EDT
2024 x86_64 x86_64 x86_64 GNU/Linux

2. w
10:52:51 up 4 min, 1 user, load average: 0.37, 1.73, 1.00
USER TTY LOGIN@ IDLE PCPU WHAT
root ttym1 10:48 27.00s 0.87s 0.03s -bash

3. Username
From environment variable \$USER: root

4. ulimit -a
real-time non-blocking time (microseconds, -R) unlimited
core file size (blocks, -c) 0
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3091300
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```
cpu time          (seconds, -t) unlimited
max user processes      (-u) 3091300
virtual memory        (kbytes, -v) unlimited
file locks           (-x) unlimited
```

```
-----  
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 31
login -- root
-bash
python3 ./run_amd_speed_aocc500_znver5_A1.py
/bin/bash ./amd_speed_aocc500_znver5_A1.sh
runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intspeed
runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.007/templogs/preenv.intspeed.007.0.log --l袩num 007.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo
model name      : AMD EPYC 9965 192-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 26
model          : 17
stepping        : 0
microcode       : 0xb101028
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 192 4K pages
cpu cores      : 192
siblings        : 384
1 physical ids (chips)
384 processors (hardware threads)
physical id 0: core ids 0-191
physical id 0: apicids 0-383
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                384
On-line CPU(s) list:  0-383
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9965 192-Core Processor
BIOS Model name:      AMD EPYC 9965 192-Core Processor
CPU family:            26
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   192
Socket(s):             1
Stepping:              0
Frequency boost:      enabled
CPU(s) scaling MHz:  61%
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

```

CPU max MHz: 3700.1951
CPU min MHz: 1500.0000
BogoMIPS: 4493.02
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mttr pge mca cmov pat pse36
       clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp
       lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid extd_apicid
       aperfmpfperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2
       x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm
       extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit
       wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
       cat_13 cdp_13 hw_pstate ssbd mba perfmon_v2 ibrs ibpb stibp
       ibrs_enhanced vmmcall fsgsbase tsc_adjust bmil avx2 smep bmi2 erms
       invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
       clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
       xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
       avx_vnni avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin
       cppo arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid
       decodeassists pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic
       v_spec_ctrl vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
       vpclmulqdq avx512_vnni avx512_bitalg avx512_vpocntdq la57 rdpid
       bus_lock_detect movmdir movdir64b overflow_recov succor smca fsrm
       avx512_vp2intersect flush_lld debug_swap

Virtualization: AMD-V
L1d cache: 9 MiB (192 instances)
L1i cache: 6 MiB (192 instances)
L2 cache: 192 MiB (192 instances)
L3 cache: 384 MiB (12 instances)
NUMA node(s): 12
NUMA node0 CPU(s): 0-15,192-207
NUMA node1 CPU(s): 16-31,208-223
NUMA node2 CPU(s): 32-47,224-239
NUMA node3 CPU(s): 48-63,240-255
NUMA node4 CPU(s): 64-79,256-271
NUMA node5 CPU(s): 80-95,272-287
NUMA node6 CPU(s): 96-111,288-303
NUMA node7 CPU(s): 112-127,304-319
NUMA node8 CPU(s): 128-143,320-335
NUMA node9 CPU(s): 144-159,336-351
NUMA node10 CPU(s): 160-175,352-367
NUMA node11 CPU(s): 176-191,368-383
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS, IBPB conditional, STIBP
always-on, RSB filling, PBRSB-eIBRS Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

From lscpu --cache:
  NAME ONE-SIZE ALL-SIZE WAYS TYPE      LEVEL    SETS PHY-LINE COHERENCY-SIZE
  L1d     48K      9M   12 Data        1      64          1           64
  L1i     32K      6M    8 Instruction  1      64          1           64
  L2      1M     192M   16 Unified      2     1024         1           64

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Platform Notes (Continued)

L3 32M 384M 16 Unified 3 32768 1 64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 12 nodes (0-11)
node 0 cpus: 0-15,192-207
node 0 size: 63459 MB
node 0 free: 62905 MB
node 1 cpus: 16-31,208-223
node 1 size: 64503 MB
node 1 free: 63873 MB
node 2 cpus: 32-47,224-239
node 2 size: 64503 MB
node 2 free: 64242 MB
node 3 cpus: 48-63,240-255
node 3 size: 64503 MB
node 3 free: 64153 MB
node 4 cpus: 64-79,256-271
node 4 size: 64503 MB
node 4 free: 64161 MB
node 5 cpus: 80-95,272-287
node 5 size: 64503 MB
node 5 free: 64217 MB
node 6 cpus: 96-111,288-303
node 6 size: 64503 MB
node 6 free: 64225 MB
node 7 cpus: 112-127,304-319
node 7 size: 64503 MB
node 7 free: 64181 MB
node 8 cpus: 128-143,320-335
node 8 size: 64503 MB
node 8 free: 64213 MB
node 9 cpus: 144-159,336-351
node 9 size: 64503 MB
node 9 free: 64212 MB
node 10 cpus: 160-175,352-367
node 10 size: 64462 MB
node 10 free: 64134 MB
node 11 cpus: 176-191,368-383
node 11 size: 64410 MB
node 11 free: 64070 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9  10  11
 0: 10 11 11 12 12 12 12 12 12 12 12 12
 1: 11 10 11 12 12 12 12 12 12 12 12 12
 2: 11 11 10 12 12 12 12 12 12 12 12 12
 3: 12 12 12 10 11 11 12 12 12 12 12 12
 4: 12 12 12 11 10 11 12 12 12 12 12 12
 5: 12 12 12 11 11 10 12 12 12 12 12 12
 6: 12 12 12 12 12 12 10 11 11 12 12 12
 7: 12 12 12 12 12 12 11 10 11 12 12 12
 8: 12 12 12 12 12 12 11 11 10 12 12 12
 9: 12 12 12 12 12 12 12 12 12 10 11 11
10: 12 12 12 12 12 12 12 12 12 11 10 11
11: 12 12 12 12 12 12 12 12 11 11 11 10
```

9. /proc/meminfo

MemTotal: 791415856 kB

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

10. who -r
run-level 3 Mar 17 10:48

11. Systemd service manager version: systemd 252 (252-32.el9_4)
Default Target Status
multi-user running

12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audited crond
dbus-broker firewalld getty@ insights-client-boot irqbalance kdump low-memory-monitor
lvm2-monitor mdmonitor microcode nis-domainname nvmefc-boot-connections rhsmcertd rsyslog
rtkit-daemon selinux-autorelabel-mark sshd sssd systemd-boot-update
systemd-network-generator tuned udisks2 upower
enabled-runtime systemd-remount-fs
disabled blk-availability canberra-system-bootup canberra-system-shutdown
canberra-system-shutdown-reboot chrony-wait chronyd-restricted console-getty
cpupower debug-shell dnf-system-upgrade hwloc-dump-hwdata ipsec kvm_stat
man-db-restart-cache-update nftables nvme-fc-autoconnect pesign rdisc rhcd rhsm rhsm-facts
rpmdb-rebuild selinux-check-proper-disable serial-getty@ sshd keygen@
systemd-boot-check-no-failures systemd-pstore systemd-sysext
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo systemd-sysupdate
systemd-sysupdate-reboot

13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd1,gpt2)/vmlinuz-5.14.0-427.13.1.el9_4.x86_64
root=/dev/mapper/rhel-root
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
nohz_full=1-383

14. cpupower frequency-info
analyzing CPU 210:
current policy: frequency should be within 1.50 GHz and 2.25 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes
Boost States: 0
Total States: 3
Pstate-P0: 38800MHz

15. tuned-adm active
Current active profile: throughput-performance

16. sysctl
kernel.numa_balancing 1
kernel.randomize_va_space 0

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Platform Notes (Continued)

```
vm.compaction_proactiveness          20
vm.dirty_background_bytes            0
vm.dirty_background_ratio           10
vm.dirty_bytes                      0
vm.dirty_expire_centisecs          3000
vm.dirty_ratio                      8
vm.dirty_writeback_centisecs       500
vm.dirtytime_expire_seconds        43200
vm.extfrag_threshold                500
vm.min_unmapped_ratio               1
vm.nr_hugepages                     0
vm.nr_hugepages_mempolicy          0
vm.nr_overcommit_hugepages         0
vm.swappiness                        1
vm.watermark_boost_factor          15000
vm.watermark_scale_factor           10
vm.zone_reclaim_mode                1

-----
17. /sys/kernel/mm/transparent_hugepage
    defrag      [always] defer defer+madvise madvise never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs   60000
    defrag                  1
    max_ptes_none           511
    max_ptes_shared          256
    max_ptes_swap             64
    pages_to_scan            4096
    scan_sleep_millisecs     10000

-----
19. OS release
    From /etc/*-release /etc/*-version
    os-release      Red Hat Enterprise Linux 9.4 (Plow)
    redhat-release  Red Hat Enterprise Linux release 9.4 (Plow)
    system-release  Red Hat Enterprise Linux release 9.4 (Plow)

-----
20. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem      Type  Size  Used Avail Use% Mounted on
    /dev/mapper/rhel-home xfs   1.0T   12G 1012G   2% /home

-----
21. /sys/devices/virtual/dmi/id
    Product:        2158H V8
    Product Family: Turin

-----
22. dmidecode
    Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Platform Notes (Continued)

12x SK Hynix HMCG94AHBRA485N 64 GB 2 rank 6400

23. BIOS

(This section combines info from /sys/devices and dmidecode.)
BIOS Vendor: American Megatrends International, LLC.
BIOS Version: 00.13.01.07
BIOS Date: 02/28/2025
BIOS Revision: 1.7

Compiler Version Notes

=====
C | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
| 657.xz_s(base, peak)

=====
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
| 641.leela_s(base, peak)

=====
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====
Fortran | 648.exchange2_s(base, peak)

=====
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc
```



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Base Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -fllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-fllvm -Wl,-reduce-array-computations=3
-Wl,-fllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -floop
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -fllvm -inline-threshold=1000
-fllvm -reduce-array-computations=3
-fllvm -unroll-threshold=50 -fopenmp=libomp -floop

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

SPECspeed®2017_int_base = 16.2

SPECspeed®2017_int_peak = 16.4

CPU2017 License: 6488

Test Date: Mar-2025

Test Sponsor: xFusion

Hardware Availability: Oct-2024

Tested by: xFusion

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

605.mcf_s (continued):

-lamdlibm -lamlalloc -lflang

625.x264_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIB -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamlalloc -lflang

657.xz_s: Same as 625.x264_s

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIB -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamlalloc-ext -lflang

631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIB -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamlalloc -lflang

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:

648.exchange2_s: basepeak = yes



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9965)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECSpeed®2017_int_base = 16.2

SPECSpeed®2017_int_peak = 16.4

Test Date: Mar-2025

Hardware Availability: Oct-2024

Software Availability: Oct-2024

Peak Other Flags

C benchmarks:

-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.2.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-03-16 22:52:50-0400.

Report generated on 2025-04-09 14:58:13 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.