SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.3

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Apr-2025
Software Availability: Oct-2024

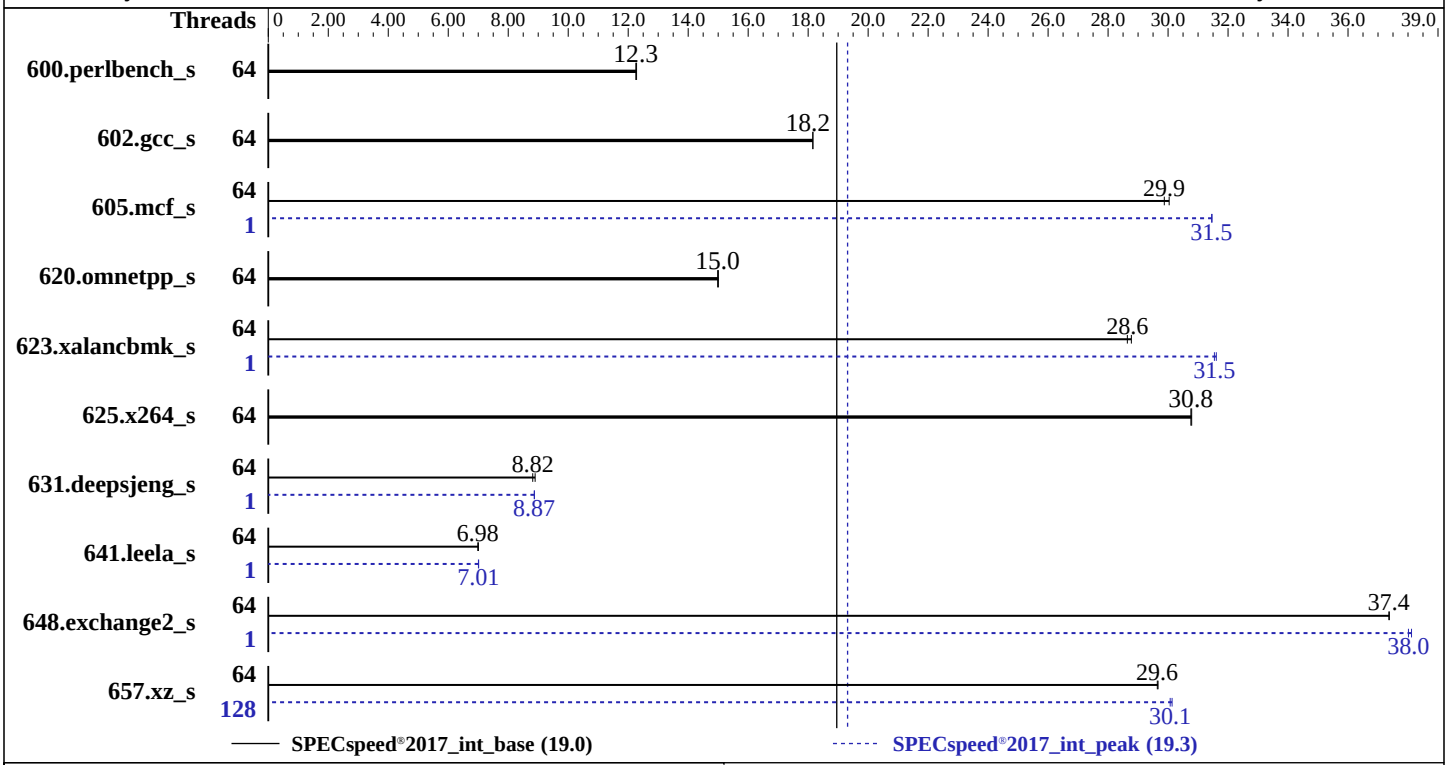

Hardware

CPU Name:	AMD EPYC 9555
Max MHz:	4400
Nominal:	3200
Enabled:	64 cores, 1 chip, 2 threads/core
Orderable:	1 chip
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
Storage:	1 x 1.6 TB PCIe NVMe SSD
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04 LTS 6.8.0-31-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 00.13.02.08 released Apr-2025
File System:	ext4
System State:	Run level 5 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2017 Integer Speed Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

xFusion

FusionServer 2158H V8
(AMD EPYC 9555)

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.3

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: May-2025
Hardware Availability: Apr-2025
Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	64	**145**	**12.3**	145	12.3			64	**145**	**12.3**	145	12.3		
602.gcc_s	64	**219**	**18.2**	219	18.2			64	**219**	**18.2**	219	18.2		
605.mcf_s	64	157	30.0	**158**	**29.9**			1	**150**	**31.5**	150	31.5		
620.omnetpp_s	64	109	15.0	**109**	**15.0**			64	109	15.0	**109**	**15.0**		
623.xalancbmk_s	64	49.2	28.8	**49.5**	**28.6**			1	**44.9**	**31.5**	44.8	31.6		
625.x264_s	64	**57.3**	**30.8**	57.3	30.8			64	**57.3**	**30.8**	57.3	30.8		
631.deepsjeng_s	64	161	8.90	**163**	**8.82**			1	162	8.87	**162**	**8.87**		
641.leela_s	64	**244**	**6.98**	243	7.01			1	**243**	**7.01**	243	7.01		
648.exchange2_s	64	**78.7**	**37.4**	78.7	37.4			1	**77.3**	**38.0**	77.1	38.1		
657.xz_s	64	208	29.7	**209**	**29.6**			128	205	30.1	**206**	**30.1**		

SPECspeed®2017_int_base = 19.0

SPECspeed®2017_int_peak = 19.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
The kernel stops sending timer ticks to CPUs by using "nohz_full=1-127"
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
GOMP_CPU_AFFINITY = "0-127"
LD_LIBRARY_PATH =
     "/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib:/home/cpu2017/amd_speed_aocc500_znver5_A_lib/lib32:"
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"
MALLOC_CONF = "retain:true"
OMP_DYNAMIC = "false"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "128M"
OMP_THREAD_LIMIT = "128"

Environment variables set by runcpu during the 605.mcf_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 623.xalancbmk_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 631.deepsjeng_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 641.leela_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 648.exchange2_s peak run:
GOMP_CPU_AFFINITY = "0"

Environment variables set by runcpu during the 657.xz_s peak run:
GOMP_CPU_AFFINITY = "0-127"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9D64 CPU + 500GiB Memory using Ubuntu 22.04

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

Platform Notes

```
BIOS settings:
 Determinism Control = Manual
 Determinism Enable = Power
 TDP Control = Manual
 TDP = 500
 PPT Control = Manual
 PPT = 500
 NUMA Nodes Per Socket = NPS4

 Sysinfo program /home/cpu2017/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 2158hv8 Thu May  8 07:48:45 2025

 SUT (System Under Test) info as seen by some common utilities.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux 2158hv8 6.8.0-31-generic #31-Ubuntu SMP PREEMPT_DYNAMIC Sat Apr 20 00:40:06 UTC 2024 x86_64 x86_64
  x86_64 GNU/Linux

------------------------------------------------------------
2. w
   07:48:45 up  1:53,  3 users,  load average: 0.10, 1.87, 1.83
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                06:45   33:08   0.21s  0.10s -bash
  root             192.168.109.248  07:15    1:53m  0.00s  0.10s sshd: root@pts/0
  root             192.168.109.248  07:15    1:53m  0.00s  0.02s sshd: root@notty

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3093863
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
 sshd: root@pts/0
 -bash
 python3 ./run_amd_speed_aocc500_znver5_A1.py
 /bin/bash ./amd_speed_aocc500_znver5_A1.sh
 runcpu --config amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 1 intspeed
 runcpu --configfile amd_speed_aocc500_znver5_A1.cfg --tune all --reportable --iterations 1 --nopower
   --runmode speed --tune base:peak --size test:train:refspeed intspeed --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.006/templogs/preenv.intspeed.006.0.log --lognum 006.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9555 64-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb002147
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 64
    siblings        : 128
    1 physical ids (chips)
    128 processors (hardware threads)
    physical id 0: core ids 0-63
    physical id 0: apicids 0-127
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               128
  On-line CPU(s) list:                  0-127
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       Advanced Micro Devices, Inc.
  Model name:                           AMD EPYC 9555 64-Core Processor
  BIOS Model name:                      AMD EPYC 9555 64-Core Processor Unknown CPU @ 3.2GHz
  BIOS CPU family:                      107
  CPU family:                           26
  Model:                                2
  Thread(s) per core:                   2
  Core(s) per socket:                   64
  Socket(s):                            1
  Stepping:                             1
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   73%
  CPU max MHz:                          4409.3750
  CPU min MHz:                          1500.0000
```

(Continued on next page)

Platform Notes (Continued)

```
  BogoMIPS:                             6389.93
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                        cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                        osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                        perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                        ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                        smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                        xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                        cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                        xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
                                        nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
                                        pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
                                        avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                        avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                        movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
                                        flush_l1d debug_swap
  Virtualization:                       AMD-V
  L1d cache:                            3 MiB (64 instances)
  L1i cache:                            2 MiB (64 instances)
  L2 cache:                             64 MiB (64 instances)
  L3 cache:                             256 MiB (8 instances)
  NUMA node(s):                         4
  NUMA node0 CPU(s):                    0-15,64-79
  NUMA node1 CPU(s):                    16-31,80-95
  NUMA node2 CPU(s):                    32-47,96-111
  NUMA node3 CPU(s):                    48-63,112-127
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                        always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       3M   12 Data            1    64        1             64
     L1i       32K       2M    8 Instruction     1    64        1             64
     L2         1M      64M   16 Unified         2  1024        1             64
     L3        32M     256M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-15,64-79
  node 0 size: 193062 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 0 free: 191229 MB
  node 1 cpus: 16-31,80-95
  node 1 size: 193524 MB
  node 1 free: 191717 MB
  node 2 cpus: 32-47,96-111
  node 2 size: 193481 MB
  node 2 free: 192660 MB
  node 3 cpus: 48-63,112-127
  node 3 size: 193467 MB
  node 3 free: 192527 MB
  node distances:
  node   0   1   2   3
    0:  10  12  12  12
    1:  12  10  12  12
    2:  12  12  10  12
    3:  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       792101648 kB

------------------------------------------------------------
10. who -r
  run-level 5 May 8 05:55

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                    LOAD   ACTIVE SUB    DESCRIPTION
  * fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
  Legend: LOAD   -> Reflects whether the unit definition was properly loaded.
          ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
          SUB    -> The low-level unit activation state, values depend on unit type.
  1 loaded units listed.

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback keyboard-setup lvm2-monitor multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                   snapd sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore
                   systemd-resolved systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw
                   unattended-upgrades vgauth
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                   systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync upower
  indirect         systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-6.8.0-31-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro
  console=tty0
  consolt=ttyS0,115200
  nohz_full=1-127

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 2:
    current policy: frequency should be within 1.50 GHz and 3.20 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  12800MHz

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing              1
  kernel.randomize_va_space          0
  vm.compaction_proactiveness       20
  vm.dirty_background_bytes          0
  vm.dirty_background_ratio         10
  vm.dirty_bytes                     0
  vm.dirty_expire_centisecs       3000
  vm.dirty_ratio                     8
  vm.dirty_writeback_centisecs     500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold             500
  vm.min_unmapped_ratio              1
  vm.nr_hugepages                    0
  vm.nr_hugepages_mempolicy          0
  vm.nr_overcommit_hugepages         0
  vm.swappiness                      1
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor         10
  vm.zone_reclaim_mode               1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
19. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04 LTS

------------------------------------------------------------
20. Disk information
SPEC is set to: /home/cpu2017
  Filesystem                     Type  Size  Used Avail Use% Mounted on
  /dev/mapper/ubuntu--vg-ubuntu--lv ext4  196G   16G  171G   9% /

------------------------------------------------------------
21. /sys/devices/virtual/dmi/id
    Product:        2158H V8
    Product Family: Turin

------------------------------------------------------------
22. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    12x SK Hynix HMCG94AHBRA480N 64 GB 2 rank 6400


------------------------------------------------------------
23. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       American Megatrends International, LLC.
   BIOS Version:      00.13.02.08
   BIOS Date:         04/30/2025
   BIOS Revision:     2.8
```

Compiler Version Notes

```
==============================================================================================================
C       | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base, peak) 625.x264_s(base, peak)
        | 657.xz_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++     | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak) 631.deepsjeng_s(base, peak)
        | 641.leela_s(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
Fortran | 648.exchange2_s(base, peak)
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Base Portability Flags

600.perlbench_s: -DSPEC_LINUX_X64 -DSPEC_LP64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LINUX -DSPEC_LP64
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-extra-inliner -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP
-flto -fremap-arrays -fstrip-mining -fstruct-layout=7
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp -lamdlibm
-lflang -lamdalloc

(Continued on next page)

Base Optimization Flags (Continued)

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -DSPEC_OPENMP -flto
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc-ext

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lflang -lamdalloc

Base Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

Peak Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

600.perlbench_s: basepeak = yes

602.gcc_s: basepeak = yes

605.mcf_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

625.x264_s: basepeak = yes

657.xz_s: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fopenmp -flto
-DSPEC_OPENMP -fremap-arrays -fstrip-mining
-fstruct-layout=9 -mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=50 -zopt -fopenmp=libomp -lomp
-lamdlibm -lamdalloc -lflang

C++ benchmarks:

620.omnetpp_s: basepeak = yes

623.xalancbmk_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt

(Continued on next page)

Peak Optimization Flags (Continued)

623.xalancbmk_s (continued):
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -fopenmp=libomp -lomp
-lamdlibm -lamdalloc-ext -lflang

631.deepsjeng_s: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -fopenmp
-flto -DSPEC_OPENMP -mllvm -reduce-array-computations=3
-mllvm -unroll-threshold=100 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-fopenmp=libomp -lomp -lamdlibm -lamdalloc -lflang

641.leela_s: Same as 631.deepsjeng_s

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-iv-split -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -fopenmp -flto -mllvm -optimize-strided-mem-cost
-mllvm -unroll-aggressive -mllvm -unroll-threshold=150 -fopenmp=libomp
-lomp -lamdlibm -lamdalloc -lflang

Peak Other Flags

C benchmarks:
-Wno-return-type -Wno-unused-command-line-argument

C++ benchmarks:
-Wno-unused-command-line-argument

Fortran benchmarks:
-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.5.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml
http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-AMD-V1.5.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-08 03:48:45-0400.
Report generated on 2025-06-03 15:46:07 by CPU2017 PS formatter v6716.
Originally published on 2025-06-03.