SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9335 32-Core Processor)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2025
Hardware Availability: Mar-2025
Software Availability: Apr-2025

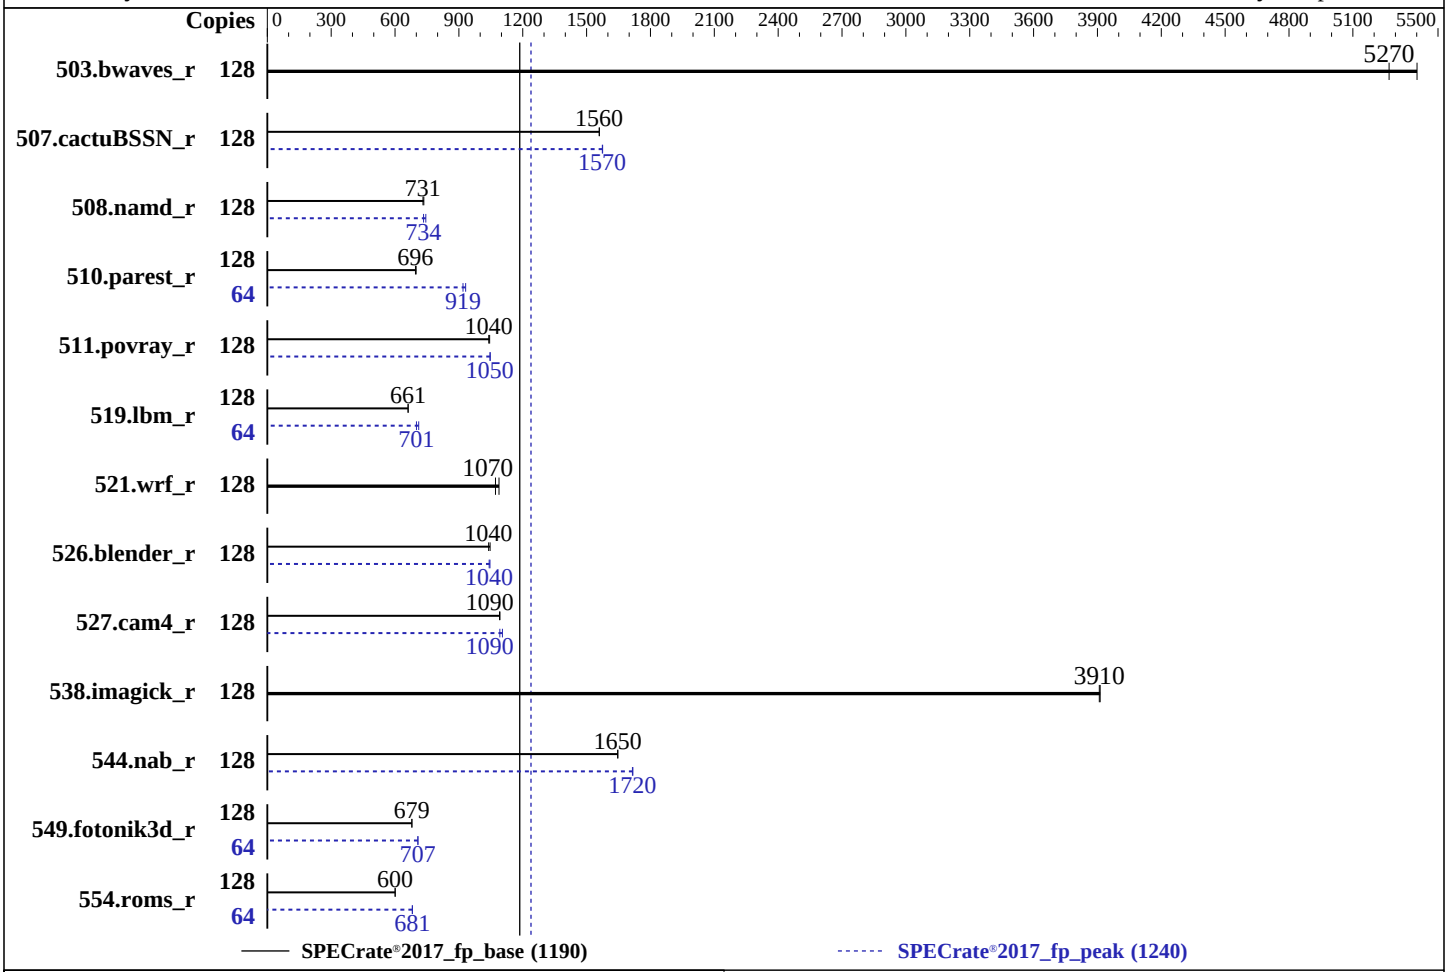

Hardware

CPU Name:	AMD EPYC 9335
Max MHz:	4400
Nominal:	3000
Enabled:	64 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	128 MB I+D on chip per chip, 32 MB shared / 8 cores
Other:	None
Memory:	768 GB (24 x 32 GB 2Rx8 PC5-6400B-R)
Storage:	80 GB on tmpfs
Other:	CPU Cooling: Air

Software

OS:	Ubuntu 24.04.2 LTS 6.8.0-59-generic
Compiler:	C/C++/Fortran: Version 5.0.0 of AOCC
Parallel:	No
Firmware:	Version 1.1.3 released Feb-2025
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7725 (AMD EPYC 9335 32-Core Processor)

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1240

CPU2017 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2025
Hardware Availability: Mar-2025
Software Availability: Apr-2025

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	128	**244**	**5270**	238	5400			128	**244**	**5270**	238	5400		
507.cactuBSSN_r	128	**104**	**1560**	104	1560			128	**103**	**1570**	103	1580		
508.namd_r	128	**166**	**731**	165	735			128	163	745	**166**	**734**		
510.parest_r	128	479	699	**481**	**696**			64	180	932	**182**	**919**		
511.povray_r	128	**287**	**1040**	286	1040			128	**286**	**1050**	285	1050		
519.lbm_r	128	**204**	**661**	204	662			64	**96.3**	**701**	94.8	711		
521.wrf_r	128	263	1090	**267**	**1070**			128	263	1090	**267**	**1070**		
526.blender_r	128	186	1050	**187**	**1040**			128	**187**	**1040**	186	1050		
527.cam4_r	128	205	1090	**205**	**1090**			128	**205**	**1090**	203	1100		
538.imagick_r	128	**81.4**	**3910**	81.4	3910			128	**81.4**	**3910**	81.4	3910		
544.nab_r	128	**131**	**1650**	131	1650			128	**126**	**1720**	125	1720		
549.fotonik3d_r	128	**735**	**679**	734	679			64	**353**	**707**	352	708		
554.roms_r	128	339	601	**339**	**600**			64	149	681	**149**	**681**		

SPECrate®2017_fp_base = 1190

SPECrate®2017_fp_peak = 1240

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,
```

(Continued on next page)

Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3-2/amd_rate_aocc500_znver5_A_lib/lib:/mnt/ramdisk/cpu20
     17-1.1.9-aocc500-znerv5_A1.3-2/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

 Benchmark run from a 80 GB ramdisk created with the cmd: "mount -t tmpfs -o size=80G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS Settings:
          Virtualization Technology : Disabled
              NUMA Nodes Per Socket : 4

                      System Profile : Custom
                             C-States : Disabled
                Memory Patrol Scrub : Disabled
  PCI ASPM L1 Link Power Management : Disabled
    Periodic Directory Rinse Tuning : Blended
                Determinism Control : Manual
                 Determinism Slider : Power Determinism
                     Optimizer Mode : Enabled
                Adaptive Allocation : Enabled
                 Dram Refresh Delay : Performance
                DIMM Self Healing -
      on Uncorrectable Memory Error : Disabled

 Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3-2/bin/sysinfo
 Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
 running on 1234567-R7725 Sat May 17 03:02:51 2025

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
```

(Continued on next page)

Platform Notes (Continued)

```
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.5)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. sysctl
17. /sys/kernel/mm/transparent_hugepage
18. /sys/kernel/mm/transparent_hugepage/khugepaged
19. OS release
20. Disk information
21. /sys/devices/virtual/dmi/id
22. dmidecode
23. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -a
  Linux 1234567-R7725 6.8.0-59-generic #61-Ubuntu SMP PREEMPT_DYNAMIC Fri Apr 11 23:16:11 UTC 2025 x86_64
  x86_64 x86_64 GNU/Linux

------------------------------------------------------------
2. w
   03:02:51 up  2:41,  2 users,  load average: 81.72, 116.76, 123.26
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
  root     tty1     -                00:21    2:39m  1.59s  0.51s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
  root             192.168.138.129  00:24   211days  0.00s  0.11s sshd: root@notty

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
  stack(kbytes)        unlimited
  coredump(blocks)     0
  memory(kbytes)       unlimited
  locked memory(kbytes) 2097152
  process              3092772
  nofiles              1024
  vmemory(kbytes)      unlimited
  locks                unlimited
  rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash ./DELL_rate.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-VERS=6.2 --output_format html,pdf,txt
 python3 ./run_amd_rate_aocc500_znver5_A1.py
 /bin/bash ./amd_rate_aocc500_znver5_A1.sh
 runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
   DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output_format html,pdf,txt fprate
```

(Continued on next page)

Platform Notes (Continued)

```
 runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 2 --define
   DL-BIOS-L3NUMA=1 --define DL-BIOS-NPS=4 --define DL-VERS=6.2 --output_format html,pdf,txt --nopower
   --runmode rate --tune base:peak --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2017.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3-2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9335 32-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 26
    model           : 2
    stepping        : 1
    microcode       : 0xb00211e
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
    TLB size        : 192 4K pages
    cpu cores       : 32
    siblings        : 64
    2 physical ids (chips)
    128 processors (hardware threads)
    physical id 0: core ids 0-31
    physical id 1: core ids 0-31
    physical id 0: apicids 0-63
    physical id 1: apicids 64-127
  Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.39.3:
  Architecture:                         x86_64
  CPU op-mode(s):                       32-bit, 64-bit
  Address sizes:                        52 bits physical, 57 bits virtual
  Byte Order:                           Little Endian
  CPU(s):                               128
  On-line CPU(s) list:                  0-127
  Vendor ID:                            AuthenticAMD
  BIOS Vendor ID:                       AMD
  Model name:                           AMD EPYC 9335 32-Core Processor
  BIOS Model name:                      AMD EPYC 9335 32-Core Processor                 CPU @ 3.0GHz
  BIOS CPU family:                      107
  CPU family:                           26
  Model:                                2
  Thread(s) per core:                   2
  Core(s) per socket:                   32
  Socket(s):                            2
  Stepping:                             1
  Frequency boost:                      enabled
  CPU(s) scaling MHz:                   38%
  CPU max MHz:                          4420.8979
  CPU min MHz:                          1500.0000
  BogoMIPS:                             5991.84
  Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                        rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                        sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                        cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
```

(Continued on next page)

Platform Notes (Continued)

```
                                osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                                smep bmi2 invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                                avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                                xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
                                cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
                                xsaveerptr rdpru wbnoinvd amd_ppin cppc amd_ibpb_ret arat npt lbrv
                                svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists
                                pausefilter pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl
                                vnmi avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
                                avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
                                movdiri movdir64b overflow_recov succor smca avx512_vp2intersect
                                flush_l1d debug_swap
  L1d cache:                    3 MiB (64 instances)
  L1i cache:                    2 MiB (64 instances)
  L2 cache:                     64 MiB (64 instances)
  L3 cache:                     256 MiB (8 instances)
  NUMA node(s):                 8
  NUMA node0 CPU(s):            0-7,64-71
  NUMA node1 CPU(s):            8-15,72-79
  NUMA node2 CPU(s):            16-23,80-87
  NUMA node3 CPU(s):            24-31,88-95
  NUMA node4 CPU(s):            32-39,96-103
  NUMA node5 CPU(s):            40-47,104-111
  NUMA node6 CPU(s):            48-55,112-119
  NUMA node7 CPU(s):            56-63,120-127
  Vulnerability Gather data sampling:   Not affected
  Vulnerability Itlb multihit:          Not affected
  Vulnerability L1tf:                   Not affected
  Vulnerability Mds:                    Not affected
  Vulnerability Meltdown:               Not affected
  Vulnerability Mmio stale data:        Not affected
  Vulnerability Reg file data sampling: Not affected
  Vulnerability Retbleed:               Not affected
  Vulnerability Spec rstack overflow:   Not affected
  Vulnerability Spec store bypass:      Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:             Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:             Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                  Not affected
  Vulnerability Tsx async abort:        Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       3M   12 Data            1    64        1             64
     L1i       32K       2M    8 Instruction     1    64        1             64
     L2         1M      64M   16 Unified         2  1024        1             64
     L3        32M     256M   16 Unified         3 32768        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-7,64-71
  node 0 size: 96031 MB
  node 0 free: 94973 MB
  node 1 cpus: 8-15,72-79
  node 1 size: 96761 MB
  node 1 free: 95869 MB
```

(Continued on next page)

Platform Notes (Continued)

```
  node 2 cpus: 16-23,80-87
  node 2 size: 96761 MB
  node 2 free: 95840 MB
  node 3 cpus: 24-31,88-95
  node 3 size: 96745 MB
  node 3 free: 95788 MB
  node 4 cpus: 32-39,96-103
  node 4 size: 96761 MB
  node 4 free: 95886 MB
  node 5 cpus: 40-47,104-111
  node 5 size: 96718 MB
  node 5 free: 95893 MB
  node 6 cpus: 48-55,112-119
  node 6 size: 96761 MB
  node 6 free: 92524 MB
  node 7 cpus: 56-63,120-127
  node 7 size: 96726 MB
  node 7 free: 95919 MB
  node distances:
  node   0   1   2   3   4   5   6   7
    0:  10  12  12  12  32  32  32  32
    1:  12  10  12  12  32  32  32  32
    2:  12  12  10  12  32  32  32  32
    3:  12  12  12  10  32  32  32  32
    4:  32  32  32  32  10  12  12  12
    5:  32  32  32  32  12  10  12  12
    6:  32  32  32  32  12  12  10  12
    7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       791826040 kB

------------------------------------------------------------
10. who -r
  run-level 5 May 17 00:21

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8.5)
  Default Target  Status
  graphical       degraded

------------------------------------------------------------
12. Failed units, from systemctl list-units --state=failed
    UNIT                    LOAD   ACTIVE SUB    DESCRIPTION
  * fwupd-refresh.service loaded failed failed Refresh fwupd metadata and update motd
  Legend: LOAD   -> Reflects whether the unit definition was properly loaded.
          ACTIVE -> The high-level unit activation state, i.e. generalization of SUB.
          SUB    -> The low-level unit activation state, values depend on unit type.
  1 loaded units listed.

------------------------------------------------------------
13. Services, from systemctl list-unit-files
  STATE            UNIT FILES
  enabled          ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                   cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                   grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
                   networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                   sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
                   systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
```

(Continued on next page)

Platform Notes (Continued)

```
  enabled-runtime  netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled         console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator
                   systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                   systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                   systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                   systemd-time-wait-sync upower
  indirect         systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked           cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
14. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/vmlinuz-6.8.0-59-generic
  root=/dev/mapper/ubuntu--vg-ubuntu--lv
  ro

------------------------------------------------------------
15. cpupower frequency-info
  analyzing CPU 2:
    current policy: frequency should be within 1.50 GHz and 3.00 GHz.
                    The governor "schedutil" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  3000MHz

------------------------------------------------------------
16. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
18. /sys/kernel/mm/transparent_hugepage/khugepaged
```

(Continued on next page)

Platform Notes (Continued)

```
   alloc_sleep_millisecs   60000
   defrag                      1
   max_ptes_none             511
   max_ptes_shared           256
   max_ptes_swap              64
   pages_to_scan            4096
   scan_sleep_millisecs    10000

 ------------------------------------------------------------
 19. OS release
   From /etc/*-release /etc/*-version
   os-release Ubuntu 24.04.2 LTS

 ------------------------------------------------------------
 20. Disk information
 SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc500-znerv5_A1.3-2
   Filesystem     Type   Size  Used Avail Use% Mounted on
   tmpfs          tmpfs   80G  3.3G   77G   5% /mnt/ramdisk

 ------------------------------------------------------------
 21. /sys/devices/virtual/dmi/id
     Vendor:         Dell Inc.
     Product:        PowerEdge R7725
     Product Family: PowerEdge
     Serial:         1234567

 ------------------------------------------------------------
 22. dmidecode
   Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
   The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
   determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     23x 802C0000802C MTC20F2085S1RC64BD2 32 GB 2 rank 6400
     1x 80CE000080CE M321R4GA3EB2-CCPKC 32 GB 2 rank 6400


 ------------------------------------------------------------
 23. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Dell Inc.
    BIOS Version:      1.1.3
    BIOS Date:         02/25/2025
    BIOS Revision:     1.1
```

Compiler Version Notes

```
==============================================================================================================
C               | 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
--------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
--------------------------------------------------------------------------------------------------------------

==============================================================================================================
C++             | 508.namd_r(base, peak) 510.parest_r(base, peak)
--------------------------------------------------------------------------------------------------------------
```

(Continued on next page)

Compiler Version Notes (Continued)

```
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C++, C          | 511.povray_r(base, peak) 526.blender_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
C++, C, Fortran | 507.cactuBSSN_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
Fortran         | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------

==============================================================================================================================
Fortran, C      | 521.wrf_r(base, peak) 527.cam4_r(base, peak)
------------------------------------------------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin
------------------------------------------------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
clang

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -Mbyteswapio -DSPEC_LP64
526.blender_r: -funsigned-char -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather -O3
-march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)

Base Optimization Flags (Continued)

C benchmarks (continued):
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

C++ benchmarks:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang -ldl

Fortran benchmarks:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang -ldl

Benchmarks using both Fortran and C:
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions
-lamdlibm -lamdalloc -lflang -ldl

Benchmarks using both C and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100

(Continued on next page)

Base Optimization Flags (Continued)

Benchmarks using both C and C++ (continued):
`-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang -ldl`

Benchmarks using Fortran, C, and C++:
`-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6 -Wl,-mllvm -Wl,-reduce-array-computations=3 -Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner -O3 -march=znver5 -fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto -fstruct-layout=7 -mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops -mllvm -lsr-in-nested-loop -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc -lflang -ldl`

Base Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

Peak Compiler Invocation

C benchmarks:
`clang`

(Continued on next page)

Peak Compiler Invocation (Continued)

C++ benchmarks:
clang++

Fortran benchmarks:
flang

Benchmarks using both Fortran and C:
flang clang

Benchmarks using both C and C++:
clang++ clang

Benchmarks using Fortran, C, and C++:
clang++ clang flang

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

538.imagick_r: basepeak = yes

544.nab_r: -m64 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

(Continued on next page)

Peak Optimization Flags (Continued)

C++ benchmarks:

508.namd_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

510.parest_r: -m64 -std=c++14 -flto -Wl,-mllvm -Wl,-suppress-fmas
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lamdalloc -ldl

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -fvector-transform
-fscalar-transform -lamdlibm -lamdalloc -ldl -lflang

554.roms_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-Mrecursive -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm
-lamdalloc -ldl -lflang

Benchmarks using both Fortran and C:

521.wrf_r: basepeak = yes

527.cam4_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays

(Continued on next page)

Peak Optimization Flags (Continued)

527.cam4_r (continued):
-mllvm -reduce-array-computations=3 -zopt -Mrecursive
-funroll-loops -mllvm -lsr-in-nested-loop
-fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Benchmarks using both C and C++:

511.povray_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false
-Wl,-mllvm -Wl,-extra-inliner -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-fremap-arrays -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm
-lamdalloc -ldl

526.blender_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -lamdlibm -lamdalloc -ldl

Benchmarks using Fortran, C, and C++:
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Ofast -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000 -mllvm -reduce-array-computations=3 -zopt
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-faggressive-loop-transform -fvector-transform -fscalar-transform
-Mrecursive -fepilog-vectorization-of-inductions -lamdlibm -lamdalloc
-ldl -lflang

Peak Other Flags

C benchmarks:
`-Wno-unused-command-line-argument`

C++ benchmarks:
`-Wno-unused-command-line-argument`

Fortran benchmarks:
`-Wno-unused-command-line-argument`

Benchmarks using both Fortran and C:
`-Wno-unused-command-line-argument`

Benchmarks using both C and C++:
`-Wno-unused-command-line-argument`

Benchmarks using Fortran, C, and C++:
`-Wno-unused-command-line-argument`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml`
`http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-05-16 23:02:50-0400.
Report generated on 2025-06-17 18:15:13 by CPU2017 PS formatter v6716.
Originally published on 2025-06-17.