SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026_fp_base = 662

SPECrate®2026_fp_peak = 662

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Nov-2024
Software Availability: Jan-2026

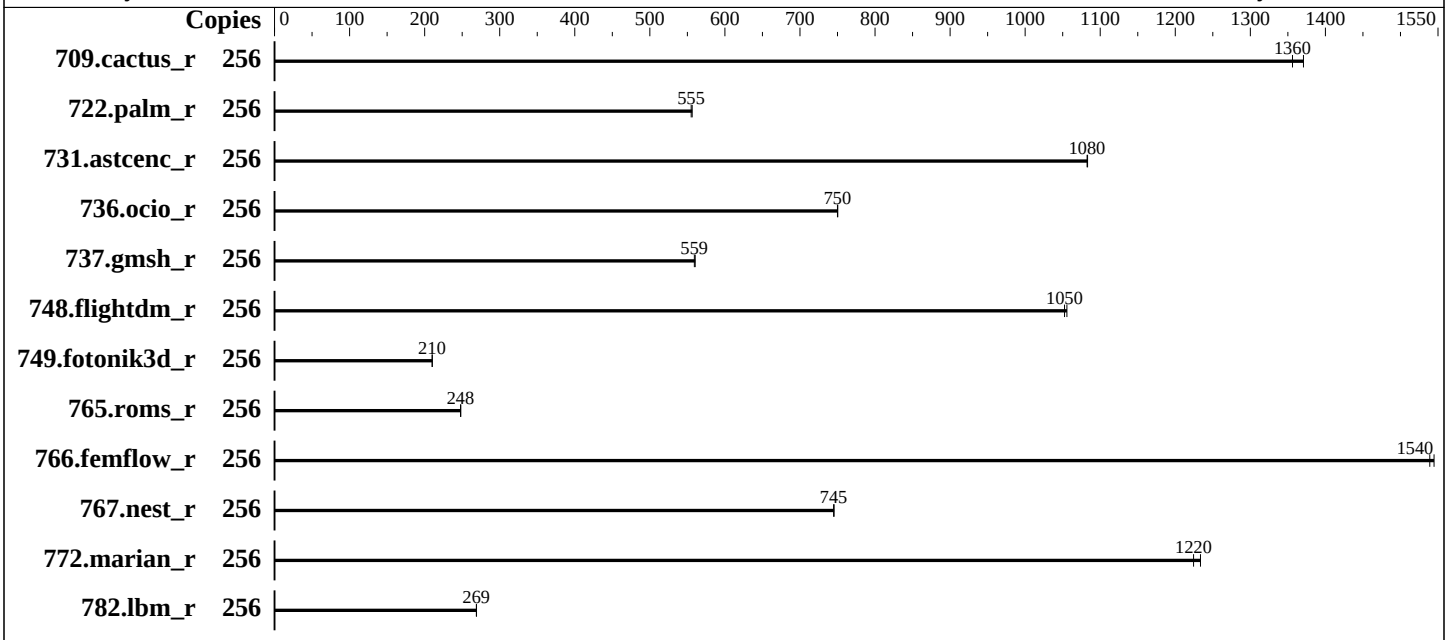

Hardware

CPU Name:	AMD EPYC 9754
Max MHz:	3100
Nominal:	2250
Enabled:	256 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	256 MB I+D on chip per chip, 16 MB shared / 8 cores
Other:	None
Memory:	1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage:	250 GB on tmpfs
Cooling:	Air
Other:	None

Software

OS:	Ubuntu 24.04 LTS 6.8.0-44-generic
Compiler:	C/C++/Fortran: Version 5.1.0 of AOCC
Compiler Category:	Vendor
Firmware:	Version 1.11.2 released Dec-2024
File System:	tmpfs
System State:	Run level 5 (graphical multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	None
Power Management:	BIOS set to prefer performance at the cost of additional power usage.

SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9754 128-Core Processor)

SPECrate®2026_fp_base = 662

SPECrate®2026_fp_peak = 662

CPU2026 License: 6573
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: Feb-2026
Hardware Availability: Nov-2024
Software Availability: Jan-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	256	**162**	**1360**	160	1370			256	**162**	**1360**	160	1370		
722.palm_r	256	607	556	**609**	**555**			256	607	556	**609**	**555**		
731.astcenc_r	256	**199**	**1080**	199	1080			256	**199**	**1080**	199	1080		
736.ocio_r	256	299	750	**299**	**750**			256	299	750	**299**	**750**		
737.gmsh_r	256	210	560	**210**	**559**			256	210	560	**210**	**559**		
748.flightdm_r	256	**174**	**1050**	174	1060			256	**174**	**1050**	174	1060		
749.fotonik3d_r	256	1408	210	**1410**	**210**			256	1408	210	**1410**	**210**		
765.roms_r	256	**1627**	**248**	1625	248			256	**1627**	**248**	1625	248		
766.femflow_r	256	**244**	**1540**	243	1540			256	**244**	**1540**	243	1540		
767.nest_r	256	**273**	**745**	272	745			256	**273**	**745**	272	745		
772.marian_r	256	328	1230	**330**	**1220**			256	328	1230	**330**	**1220**		
782.lbm_r	256	545	269	**546**	**269**			256	545	269	**546**	**269**		

SPECrate®2026_fp_base = 662

SPECrate®2026_fp_peak = 662

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

```
The AMD64 AOCC Compiler Suite is available at
http://developer.amd.com/amd-aocc/
```

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
```

(Continued on next page)

Operating System Notes (Continued)

```
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.
To enable Transparent Hugepages (THP) for all allocations,
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH =
     "/mnt/ramdisk/cpu2026rc2/amd_rate_aocc510_znver5_A_lib/lib:/mnt/ramdisk/
     cpu2026rc2/amd_rate_aocc510_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

```
Binaries were compiled on a system with 2x AMD EPYC Venice256 CPU + 2TiB Memory using Ubuntu 24.04

Benchmark run from a 250 GB ramdisk created with the cmd: "mount -t tmpfs -o size=250G tmpfs /mnt/ramdisk"
```

Platform Notes

```
 BIOS settings:
            DRAM Refresh Delay : Performance
         DIMM Self Healing on
    Uncorrectable Memory Error : Disabled

     Virtualization Technology : Disabled
         NUMA Nodes per Socket : 4

                System Profile : Custom
                      C-States : Disabled
           Memory Patrol Scrub : Disabled
           PCI ASPM L1 Link
              Power Management : Disabled
            Determinism Slider : Power Determinism

 Sysinfo program /mnt/ramdisk/cpu2026rc2/bin/sysinfo
 Rev: 069f95da7e7f5d81b2ce48a82150e54f
 running on SLR7601-R7625 Tue Feb  3 21:55:00 2026

 SUT (System Under Test) info as seen by some common utilities.
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
Table of contents
------------------------------------------------------------
 1. uname -srvm
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. cpupower frequency-info
15. sysctl
16. /sys/kernel/mm/transparent_hugepage
17. /sys/kernel/mm/transparent_hugepage/khugepaged
18. OS release
19. Disk information
20. /sys/devices/virtual/dmi/id
21. dmidecode
22. BIOS
------------------------------------------------------------

------------------------------------------------------------
1. uname -srvm
  Linux 6.8.0-44-generic #44-Ubuntu SMP PREEMPT_DYNAMIC Tue Aug 13 13:35:26 UTC 2024 x86_64

------------------------------------------------------------
2. w
   21:55:00 up  5:04,  1 user,  load average: 196.37, 417.28, 465.68
  USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
  root     tty1     -                18:34    3:19m  6.82s  3.46s /bin/bash ./amd_rate_aocc510_znver5_A1.sh

------------------------------------------------------------
3. Username
  From environment variable $USER:  root

------------------------------------------------------------
4. ulimit -a
  time(seconds)        unlimited
  file(blocks)         unlimited
  data(kbytes)         unlimited
```

(Continued on next page)

Platform Notes (Continued)

```
   stack(kbytes)        unlimited
   coredump(blocks)     0
   memory(kbytes)       unlimited
   locked memory(kbytes) 2097152
   process              6189609
   nofiles              1024
   vmemory(kbytes)      unlimited
   locks                unlimited
   rtprio               0

------------------------------------------------------------
5. sysinfo process ancestry
 /sbin/init
 /bin/login -p --
 -bash
 /bin/bash /home/DellFiles/bin/DELL_rate.sh
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
 /bin/bash /home/DellFiles/bin/dell-run-main.sh rate
/bin/bash /home/DellFiles/bin/AMD/dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define
   DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt
 python3 ./run_amd_rate_aocc510_znver5_A1.py
 /bin/bash ./amd_rate_aocc510_znver5_A1.sh
 runcpu --config amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 2 --define
   DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProc=1 --define
   DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt fprate
 runcpu --configfile amd_rate_aocc510_znver5_A1.cfg --tune base --reportable --iterations 2 --define
   DL-BIOS-NPS=4 --define DL-BIOSinc=Dell-BIOS_EPYC-4.inc --define DL-BIOS-LogProc=1 --define
   DL-BIOS-adddcD=1 --define DL-VERS=5.3.6 --output_format html,pdf,txt --nopower --runmode rate --tune base
   --size test:train:refrate fprate --nopreenv --note-preenv --logfile
   $SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2026rc2

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : AMD EPYC 9754 128-Core Processor
    vendor_id       : AuthenticAMD
    cpu family      : 25
    model           : 160
    stepping        : 1
    microcode       : 0xaa00116
    bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass srso
    TLB size        : 3584 4K pages
    cpu cores       : 128
    siblings        : 256
    2 physical ids (chips)
    512 processors (hardware threads)
```

(Continued on next page)

Platform Notes (Continued)

```
     physical id 0: core ids 0-127
     physical id 1: core ids 0-127
     physical id 0: apicids 0-255
     physical id 1: apicids 256-511
   Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
    virtualized systems.  Use the above data carefully.

 ------------------------------------------------------------
 7. lscpu

 From lscpu from util-linux 2.39.3:
   Architecture:                         x86_64
   CPU op-mode(s):                       32-bit, 64-bit
   Address sizes:                        52 bits physical, 57 bits virtual
   Byte Order:                           Little Endian
   CPU(s):                               512
   On-line CPU(s) list:                  0-511
   Vendor ID:                            AuthenticAMD
   BIOS Vendor ID:                       AMD
   Model name:                           AMD EPYC 9754 128-Core Processor
   BIOS Model name:                    AMD EPYC 9754 128-Core Processor                CPU @ 2.2GHz
   BIOS CPU family:                      107
   CPU family:                           25
   Model:                                160
   Thread(s) per core:                   2
   Core(s) per socket:                   128
   Socket(s):                            2
   Stepping:                             1
   Frequency boost:                      enabled
   CPU(s) scaling MHz:                   78%
   CPU max MHz:                          2250.0000
   CPU min MHz:                          1500.0000
   BogoMIPS:                             4500.95
   Flags:                                fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                        pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                                         rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                                        extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                                         sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                                         cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                                          osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
                                         perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                                         ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase bmi1 avx2 smep bmi2
                                         erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                                          clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                          xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                          user_shstk avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd
                                        amd_ppin cppc arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
```

(Continued on next page)

Platform Notes (Continued)

```
                                   flushbyasid decodeassists pausefilter pfthreshold avic
                                 v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi avx512vbmi umip pku
                                 ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
                                 avx512_vpopcntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
                                           debug_swap
  L1d cache:                               8 MiB (256 instances)
  L1i cache:                               8 MiB (256 instances)
  L2 cache:                                256 MiB (256 instances)
  L3 cache:                                512 MiB (32 instances)
  NUMA node(s):                            8
  NUMA node0 CPU(s):                       0-31,256-287
  NUMA node1 CPU(s):                       32-63,288-319
  NUMA node2 CPU(s):                       64-95,320-351
  NUMA node3 CPU(s):                       96-127,352-383
  NUMA node4 CPU(s):                       128-159,384-415
  NUMA node5 CPU(s):                       160-191,416-447
  NUMA node6 CPU(s):                       192-223,448-479
  NUMA node7 CPU(s):                       224-255,480-511
  Vulnerability Gather data sampling:      Not affected
  Vulnerability Itlb multihit:             Not affected
  Vulnerability L1tf:                      Not affected
  Vulnerability Mds:                       Not affected
  Vulnerability Meltdown:                  Not affected
  Vulnerability Mmio stale data:           Not affected
  Vulnerability Reg file data sampling:    Not affected
  Vulnerability Retbleed:                  Not affected
  Vulnerability Spec rstack overflow:      Mitigation; Safe RET
  Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:                Mitigation; usercopy/swapgs barriers and __user pointer sanitization
  Vulnerability Spectre v2:                Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
                                           always-on; RSB filling; PBRSB-eIBRS Not affected; BHI Not affected
  Vulnerability Srbds:                     Not affected
  Vulnerability Tsx async abort:           Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL  SETS PHY-LINE COHERENCY-SIZE
     L1d       32K       8M    8 Data            1    64        1             64
     L1i       32K       8M    8 Instruction     1    64        1             64
     L2         1M     256M    8 Unified         2  2048        1             64
     L3        16M     512M   16 Unified         3 16384        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 8 nodes (0-7)
  node 0 cpus: 0-31,256-287
  node 0 size: 192992 MB
```

(Continued on next page)

Platform Notes (Continued)

```
   node 0 free: 190181 MB
   node 1 cpus: 32-63,288-319
   node 1 size: 193512 MB
   node 1 free: 191243 MB
   node 2 cpus: 64-95,320-351
   node 2 size: 193512 MB
   node 2 free: 191309 MB
   node 3 cpus: 96-127,352-383
   node 3 size: 193453 MB
   node 3 free: 191218 MB
   node 4 cpus: 128-159,384-415
   node 4 size: 193512 MB
   node 4 free: 191264 MB
   node 5 cpus: 160-191,416-447
   node 5 size: 193512 MB
   node 5 free: 191375 MB
   node 6 cpus: 192-223,448-479
   node 6 size: 193512 MB
   node 6 free: 180690 MB
   node 7 cpus: 224-255,480-511
   node 7 size: 193467 MB
   node 7 free: 191261 MB
   node distances:
   node   0   1   2   3   4   5   6   7
     0:  10  12  12  12  32  32  32  32
     1:  12  10  12  12  32  32  32  32
     2:  12  12  10  12  32  32  32  32
     3:  12  12  12  10  32  32  32  32
     4:  32  32  32  32  10  12  12  12
     5:  32  32  32  32  12  10  12  12
     6:  32  32  32  32  12  12  10  12
     7:  32  32  32  32  12  12  12  10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       1584612652 kB

------------------------------------------------------------
10. who -r
  run-level 5 Feb 3 16:51

------------------------------------------------------------
11. Systemd service manager version: systemd 255 (255.4-1ubuntu8)
  Default Target  Status
  graphical       running

------------------------------------------------------------
```

(Continued on next page)

Platform Notes (Continued)

```
12. Services, from systemctl list-unit-files
  STATE             UNIT FILES
  enabled           ModemManager apparmor apport blk-availability cloud-config cloud-final cloud-init
                    cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                    grub-common grub-initrd-fallback keyboard-setup lm-sensors lvm2-monitor multipathd
                    networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog secureboot-db setvtrgb
                    sysstat systemd-networkd systemd-networkd-wait-online systemd-pstore systemd-resolved
                    systemd-timesyncd thermald ua-reboot-cmds ubuntu-advantage udisks2 ufw vgauth
  enabled-runtime   netplan-ovs-cleanup systemd-fsck-root systemd-remount-fs
  disabled          console-getty debug-shell iscsid nftables rsync serial-getty@ ssh
                    systemd-boot-check-no-failures systemd-confext systemd-network-generator
                    systemd-networkd-wait-online@ systemd-pcrlock-file-system systemd-pcrlock-firmware-code
                    systemd-pcrlock-firmware-config systemd-pcrlock-machine-id systemd-pcrlock-make-policy
                    systemd-pcrlock-secureboot-authority systemd-pcrlock-secureboot-policy systemd-sysext
                    systemd-time-wait-sync upower
  indirect          systemd-sysupdate systemd-sysupdate-reboot uuidd
  masked            cryptdisks cryptdisks-early hwclock multipath-tools-boot screen-cleanup sudo x11-common

------------------------------------------------------------
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.8.0-44-generic
  root=UUID=8458ae54-58cc-4621-9289-b1d743fde503
  ro

------------------------------------------------------------
14. cpupower frequency-info
  analyzing CPU 448:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "schedutil" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes
      Boost States: 0
      Total States: 3
      Pstate-P0:  2250MHz

------------------------------------------------------------
15. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           0
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                      8
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                       1
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                1

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage
  defrag          [always] defer defer+madvise madvise never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
18. OS release
  From /etc/*-release /etc/*-version
  os-release Ubuntu 24.04 LTS

------------------------------------------------------------
19. Disk information
SPEC is set to: /mnt/ramdisk/cpu2026rc2
  Filesystem     Type   Size  Used Avail Use% Mounted on
  tmpfs          tmpfs  250G   10G  241G   4% /mnt/ramdisk

------------------------------------------------------------
20. /sys/devices/virtual/dmi/id
    Vendor:         Dell Inc.
    Product:        PowerEdge R7625
    Product Family: PowerEdge
    Serial:         SLR7601
```

(Continued on next page)

Platform Notes (Continued)

```
------------------------------------------------------------
21. dmidecode
  Additional information from dmidecode 3.5 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
  "DMTF SMBIOS" standard.
  Memory:
    6x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
    10x 80AD000080AD HMCG94AEBRA109N 64 GB 2 rank 4800
    8x 80AD000080AD HMCG94MEBRA109N 64 GB 2 rank 4800


------------------------------------------------------------
22. BIOS
(This section combines info from /sys/devices and dmidecode.)
   BIOS Vendor:       Dell Inc.
   BIOS Version:      1.11.2
   BIOS Date:         12/18/2024
   BIOS Revision:     1.11
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
        | 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base) 737.gmsh_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)

Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
------------------------------------------------------------------------------
AMD clang version 17.0.6 (CLANG: AOCC_5.1.0-Build#1994 2025_12_23)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-5.1.0/bin
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
`clang`

C++ benchmarks:
`clang++`

Fortran benchmarks:
`flang`

Benchmarks using both C and C++:
`clang++ clang`

Base Portability Flags

709.cactus_r: `-DSPEC_LP64`
722.palm_r: `-DSPEC_LP64`
731.astcenc_r: `-DSPEC_LP64`
736.ocio_r: `-fno-finite-math-only -DSPEC_LP64`
737.gmsh_r: `-fno-fast-math -DSPEC_LP64`
748.flightdm_r: `-fno-reciprocal-math -DSPEC_LP64`
749.fotonik3d_r: `-DSPEC_LP64`
765.roms_r: `-DSPEC_LP64`
766.femflow_r: `-DSPEC_LP64`
767.nest_r: `-fno-finite-math-only -DSPEC_LP64`
772.marian_r: `-DSPEC_LP64`
782.lbm_r: `-DSPEC_LP64`

Base Optimization Flags

C benchmarks:

```
-m64 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

C++ benchmarks:

```
-m64 -std=c++17 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -flto
-mllvm -unroll-threshold=100 -mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lamdalloc
-lflang
```

Fortran benchmarks:

```
-m64 -Mstandard -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-enable-X86-prefetching
-Wl,-mllvm -Wl,-enable-aggressive-gather=true
-Wl,-mllvm -Wl,-enable-masked-gather-sequence=false -ffast-math -O3
-march=znver5 -fveclib=AMDLIBM -flto -Mrecursive -funroll-loops
-mllvm -lsr-in-nested-loop -mllvm -reduce-array-computations=3
-fepilog-vectorization-of-inductions -zopt -lamdlibm -lamdalloc
-lflang
```

Benchmarks using both C and C++:

```
-m64 -std=c++17 -std=c18 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-extra-inliner
-ffast-math -O3 -march=znver5 -fveclib=AMDLIBM -fno-PIE -no-pie
-flto -fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000 -lamdlibm -lamdalloc -lflang
```

Peak Optimization Flags

C benchmarks:

(Continued on next page)

Peak Optimization Flags (Continued)

782.lbm_r: `basepeak = yes`

C++ benchmarks:

731.astcenc_r: `basepeak = yes`

736.ocio_r: `basepeak = yes`

748.flightdm_r: `basepeak = yes`

766.femflow_r: `basepeak = yes`

767.nest_r: `basepeak = yes`

772.marian_r: `basepeak = yes`

Fortran benchmarks:

722.palm_r: `basepeak = yes`

749.fotonik3d_r: `basepeak = yes`

765.roms_r: `basepeak = yes`

Benchmarks using both C and C++:

709.cactus_r: `basepeak = yes`

737.gmsh_r: `basepeak = yes`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.html`
`http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2026/results/flags/aocc-flags.2026-05-04.xml`
`http://www.spec.org/cpu2026/results/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.8.xml`

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v0.902.0 on 2026-02-03 16:54:59-0500.
Report generated on 2026-08-11 15:11:42 by CPU2026 PDF formatter (unknown).
Originally published on 2026-05-05.