SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(1.90 GHz,Intel Xeon Platinum 8592+)

SPECrate®2026_fp_base = 507

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Feb-2024
Software Availability: Apr-2026

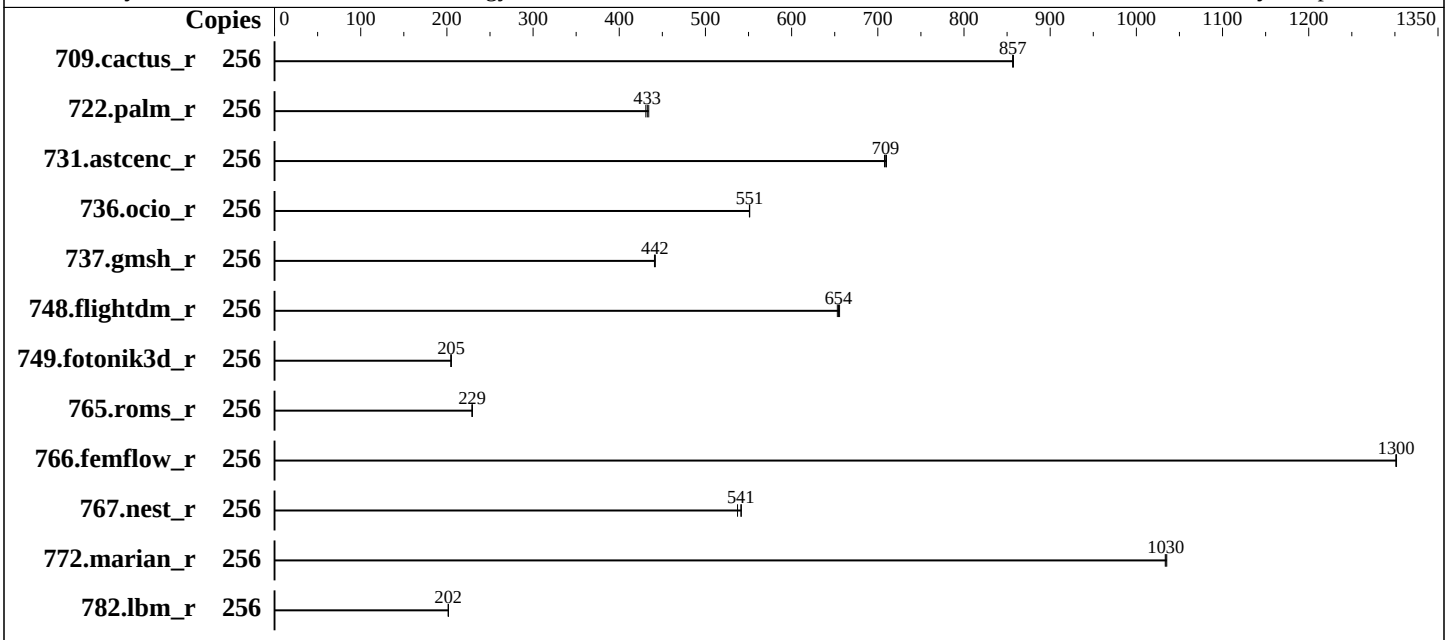

Hardware

CPU Name:	Intel Xeon Platinum 8592+
Max MHz:	3900
Nominal:	1900
Enabled:	128 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 48 KB D on chip per core
L2:	2 MB I+D on chip per core
L3:	320 MB I+D on chip per chip
Other:	None
Memory:	512 GB (16 x 32 GB 2Rx8 PC5-5600B-R)
Storage:	1 x 480 GB SATA SSD
Cooling:	Air
Other:	None

Software

OS:	SUSE Linux Enterprise Server 16.0 Kernel 6.12.0-160000.5-default
Compiler:	C/C++: Version 2026.0 of Intel oneAPI DPC++/C++ Compiler for Linux; Fortran: Version 2026.0 of Intel Fortran Compiler for Linux
Compiler Category:	Vendor
Firmware:	Lenovo BIOS Version ESE139E 3.90 released May-2026
File System:	btrfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	Not Applicable
Other:	tcmalloc memory allocator v2.18.1
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage

SPEC CPU®2026 Floating Point Rate Result

Copyright 2026 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR650 V3
(1.90 GHz,Intel Xeon Platinum 8592+)

SPECrate®2026_fp_base = 507

SPECrate®2026_fp_peak = Not Run

CPU2026 License: 9017
Test Sponsor: Lenovo Global Technology
Tested by: Lenovo Global Technology

Test Date: May-2026
Hardware Availability: Feb-2024
Software Availability: Apr-2026

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
709.cactus_r	256	256	857	**256**	**857**	256	857							
722.palm_r	256	784	431	**781**	**433**	778	434							
731.astcenc_r	256	303	710	**303**	**709**	304	708							
736.ocio_r	256	407	551	406	551	**406**	**551**							
737.gmsh_r	256	**266**	**442**	266	442	267	441							
748.flightdm_r	256	**280**	**654**	281	653	280	656							
749.fotonik3d_r	256	**1444**	**205**	1447	205	1443	205							
765.roms_r	256	1756	230	1759	229	**1759**	**229**							
766.femflow_r	256	288	1300	**289**	**1300**	289	1300							
767.nest_r	256	**375**	**541**	375	542	378	537							
772.marian_r	256	**391**	**1030**	390	1040	391	1030							
782.lbm_r	256	728	202	727	202	**727**	**202**							

SPECrate®2026_fp_base = 507

SPECrate®2026_fp_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Environment Variables Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2026-1.0.1-ic2026.0-rate/lib"
```

General Notes

```
Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM
memory using CentOS Stream 9.
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3>       /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)

General Notes (Continued)

```
 numactl --interleave=all runcpu <etc>
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
 tcmalloc, a fast, multithreaded malloc implementation
 built with the CentOS Stream 9, and the system compiler gcc 11.5.0
 sources available from github.com/gperftools/gperftools
```

Platform Notes

```
BIOS configuration:
Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
SNC set to SNC2
Misc set to Option4

 Sysinfo program /home/cpu2026-1.0.1-ic2026.0-rate/bin/sysinfo
 Rev: 779ab21020787073335a329f3a45e2cd
 running on localhost Wed May 27 20:51:01 2026

 SUT (System Under Test) info as seen by some common utilities.

 ------------------------------------------------------------
 Table of contents
 ------------------------------------------------------------
  1. uname -srvm
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
 10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
 11. Services, from systemctl list-unit-files
 12. Linux kernel boot-time arguments, from /proc/cmdline
 13. cpupower frequency-info
 14. sysctl
 15. /sys/kernel/mm/transparent_hugepage
 16. /sys/kernel/mm/transparent_hugepage/khugepaged
 17. OS release
 18. Disk information
 19. /sys/devices/virtual/dmi/id
```

(Continued on next page)

Platform Notes (Continued)

```
 20. dmidecode
 21. BIOS
------------------------------------------------------------

------------------------------------------------------------
 1. uname -srvm
   Linux 6.12.0-160000.5-default #1 SMP PREEMPT_DYNAMIC Wed Sep 10 15:26:25 UTC 2025 (3545bbd) x86_64

------------------------------------------------------------
 2. w
    20:51:01 up 9 min,  1 user,  load average: 0.19, 0.33, 0.23
   USER     TTY      FROM             LOGIN@   IDLE   JCPU   PCPU  WHAT
   root             172.30.81.13     20:50           0.00s  0.03s sshd-session: root [priv]

------------------------------------------------------------
 3. Username
   From environment variable $USER:  root

------------------------------------------------------------
 4. ulimit -a
   real-time non-blocking time  (microseconds, -R) unlimited
   core file size              (blocks, -c) unlimited
   data seg size               (kbytes, -d) unlimited
   scheduling priority                 (-e) 0
   file size                   (blocks, -f) unlimited
   pending signals                     (-i) 2061253
   max locked memory           (kbytes, -l) 8192
   max memory size             (kbytes, -m) unlimited
   open files                          (-n) 1024
   pipe size                (512 bytes, -p) 8
   POSIX message queues         (bytes, -q) 819200
   real-time priority                  (-r) 0
   stack size                  (kbytes, -s) unlimited
   cpu time                   (seconds, -t) unlimited
   max user processes                  (-u) 2061253
   virtual memory              (kbytes, -v) unlimited
   file locks                          (-x) unlimited

------------------------------------------------------------
 5. sysinfo process ancestry
  /usr/lib/systemd/systemd --switched-root --system --deserialize=47
  sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
  sshd-session: root [priv]
  sshd-session: root@notty
  /bin/bash ./02.remote_local_SPECcpu_1.02.sh
  sh Run503-compliant-ic2026.0-lin-sapphirerapids-ratefp-base-smt-on-20260429_revB.sh
 runcpu --nobuild --iterations=3 --reportable --action validate --define default-platform-flags --copies 256
```

(Continued on next page)

Platform Notes (Continued)

```
   -c ic2026.0-sapphirerapids-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define cores=128
   --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base -o all fprate
 runcpu --nobuild --iterations 3 --reportable --action validate --define default-platform-flags --copies 256
   --configfile ic2026.0-sapphirerapids-cpu2026-1.0.1-rate-20260429_revB.cfg --define smt-on --define
   cores=128 --define physicalfirst --define invoke_with_interleave --define drop_caches --tune base
   --output_format all --nopower --runmode rate --tune base --size refrate fprate --nopreenv --note-preenv
   --logfile $SPEC/tmp/CPU2026.002/templogs/preenv.fprate.002.0.log --lognum 002.0 --from_runcpu 2
 specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2026-1.0.1-ic2026.0-rate

------------------------------------------------------------
6. /proc/cpuinfo
    model name      : INTEL(R) XEON(R) PLATINUM 8592+
    vendor_id       : GenuineIntel
    cpu family      : 6
    model           : 207
    stepping        : 2
    microcode       : 0x210002d3
   bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrs_pbrsb bhi spectre_v2_user
    cpu cores       : 64
    siblings        : 128
    2 physical ids (chips)
    256 processors (hardware threads)
    physical id 0: core ids 0-63
    physical id 1: core ids 0-63
    physical id 0: apicids 0-127
    physical id 1: apicids 128-255
 Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
  virtualized systems.  Use the above data carefully.

------------------------------------------------------------
7. lscpu

From lscpu from util-linux 2.41.1:
  Architecture:                            x86_64
  CPU op-mode(s):                          32-bit, 64-bit
  Address sizes:                           46 bits physical, 57 bits virtual
  Byte Order:                              Little Endian
  CPU(s):                                  256
  On-line CPU(s) list:                     0-255
  Vendor ID:                               GenuineIntel
  Model name:                              INTEL(R) XEON(R) PLATINUM 8592+
  CPU family:                              6
  Model:                                   207
  Thread(s) per core:                      2
  Core(s) per socket:                      64
  Socket(s):                               2
```

(Continued on next page)

Platform Notes (Continued)

```
  Stepping:                              2
  CPU(s) scaling MHz:                    21%
  CPU max MHz:                           3900.0000
  CPU min MHz:                           800.0000
  BogoMIPS:                              3800.00
  Flags:                                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                                          pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
                                         pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good
                                          nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                                         pclmulqdq dtes64 ds_cpl smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
                                         pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                                          xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                                          cat_l3 cat_l2 cdp_l3 intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp
                                         ibrs_enhanced fsgsbase tsc_adjust bmi1 avx2 smep bmi2 erms invpcid
                                          cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma clflushopt
                                          clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                                          xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
                                         split_lock_detect user_shstk avx_vnni avx512_bf16 wbnoinvd dtherm
                                          ida arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2
                                          gfni vaes vpclmulqdq avx512_vnni avx512_bitalg avx512_vpopcntdq
                                         la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm
                                            md_clear serialize tsxldtrk pconfig arch_lbr ibt amx_bf16
                                            avx512_fp16 amx_tile amx_int8 flush_l1d arch_capabilities
  L1d cache:                                   6 MiB (128 instances)
  L1i cache:                                   4 MiB (128 instances)
  L2 cache:                                    256 MiB (128 instances)
  L3 cache:                                    640 MiB (2 instances)
  NUMA node(s):                                4
  NUMA node0 CPU(s):                           0-31,128-159
  NUMA node1 CPU(s):                           32-63,160-191
  NUMA node2 CPU(s):                           64-95,192-223
  NUMA node3 CPU(s):                           96-127,224-255
  Vulnerability Gather data sampling:      Not affected
  Vulnerability Indirect target selection: Not affected
  Vulnerability Itlb multihit:             Not affected
  Vulnerability L1tf:                      Not affected
  Vulnerability Mds:                       Not affected
  Vulnerability Meltdown:                  Not affected
  Vulnerability Mmio stale data:           Not affected
  Vulnerability Reg file data sampling:    Not affected
  Vulnerability Retbleed:                  Not affected
  Vulnerability Spec rstack overflow:      Not affected
  Vulnerability Spec store bypass:         Mitigation; Speculative Store Bypass disabled via prctl
  Vulnerability Spectre v1:                Mitigation; usercopy/swapgs barriers and __user pointer
                                               sanitization
  Vulnerability Spectre v2:                Mitigation; Enhanced / Automatic IBRS; IBPB conditional;
                                               PBRSB-eIBRS SW sequence; BHI BHI_DIS_S
```

(Continued on next page)

Platform Notes (Continued)

```
  Vulnerability Srbds:                    Not affected
  Vulnerability Tsa:                      Not affected
  Vulnerability Tsx async abort:          Not affected

From lscpu --cache:
     NAME ONE-SIZE ALL-SIZE WAYS TYPE        LEVEL   SETS PHY-LINE COHERENCY-SIZE
     L1d       48K       6M   12 Data            1     64        1             64
     L1i       32K       4M    8 Instruction     1     64        1             64
     L2         2M     256M   16 Unified         2   2048        1             64
     L3       320M     640M   20 Unified         3 262144        1             64

------------------------------------------------------------
8. numactl --hardware
NOTE: a numactl 'node' might or might not correspond to a physical chip.
  available: 4 nodes (0-3)
  node 0 cpus: 0-31,128-159
  node 0 size: 128664 MB
  node 0 free: 127979 MB
  node 1 cpus: 32-63,160-191
  node 1 size: 129000 MB
  node 1 free: 128053 MB
  node 2 cpus: 64-95,192-223
  node 2 size: 128959 MB
  node 2 free: 128288 MB
  node 3 cpus: 96-127,224-255
  node 3 size: 128923 MB
  node 3 free: 128322 MB
  node distances:
  node     0    1    2    3
     0:   10   12   21   21
     1:   12   10   21   21
     2:   21   21   10   12
     3:   21   21   12   10

------------------------------------------------------------
9. /proc/meminfo
   MemTotal:       527920928 kB

'who -r' did not return a run level

------------------------------------------------------------
10. Systemd service manager version: systemd 257 (257.7+suse.19.ga0dfd5de4c)
  Default Target  Status
  graphical       running

------------------------------------------------------------
11. Services, from systemctl list-unit-files
```

(Continued on next page)

Platform Notes (Continued)

```
   STATE             UNIT FILES
  enabled          NetworkManager NetworkManager-dispatcher NetworkManager-wait-online audit-rules auditd
                    chronyd dbus-broker firewalld getty@ irqbalance issue-generator kbdsettings klog
                     lvm2-monitor rollback rsyslog smartd soft-reboot-cleanup sshd systemd-pstore
                       wpa_supplicant wtmpdb-update-boot
   enabled-runtime  systemd-remount-fs
  disabled          blk-availability boot-sysctl ca-certificates ca-certificates-setup chrony-wait
                     console-getty debug-shell dnsmasq exchange-bmc-os-info gpm grub2-once ipmievd
                    issue-add-ssh-keys kernel-sysctl kexec-load lastlog2-import lunmask lvm-devices-import
                    man-db-create multipathd nftables nis-domainname rpmconfigcheck rsyncd serial-getty@
                       setup-systemd-proxy-env smartd_generate_opts snmpd snmptrapd
                   systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext
                     systemd-time-wait-sync systemd-timesyncd systemd-udev-load-credentials udisks2
                       wpa_supplicant@
   indirect          systemd-userdbd

------------------------------------------------------------
12. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-6.12.0-160000.5-default
  root=UUID=947e53e0-d208-4ab7-9188-9ca936e60a3f
  mitigations=auto
  quiet
  security=selinux
  selinux=1

------------------------------------------------------------
13. cpupower frequency-info
  analyzing CPU 162:
    current policy: frequency should be within 800 MHz and 3.90 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
      Supported: yes
      Active: yes

------------------------------------------------------------
14. sysctl
  kernel.numa_balancing               1
  kernel.randomize_va_space           2
  vm.compaction_proactiveness        20
  vm.dirty_background_bytes           0
  vm.dirty_background_ratio          10
  vm.dirty_bytes                      0
  vm.dirty_expire_centisecs        3000
  vm.dirty_ratio                     20
  vm.dirty_writeback_centisecs      500
  vm.dirtytime_expire_seconds     43200
```

(Continued on next page)

Platform Notes (Continued)

```
  vm.extfrag_threshold              500
  vm.min_unmapped_ratio               1
  vm.nr_hugepages                     0
  vm.nr_hugepages_mempolicy           0
  vm.nr_overcommit_hugepages          0
  vm.swappiness                      60
  vm.watermark_boost_factor       15000
  vm.watermark_scale_factor          10
  vm.zone_reclaim_mode                0

------------------------------------------------------------
15. /sys/kernel/mm/transparent_hugepage
  defrag          always defer defer+madvise [madvise] never
  enabled         [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

------------------------------------------------------------
16. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs   60000
  defrag                      1
  max_ptes_none             511
  max_ptes_shared           256
  max_ptes_swap              64
  pages_to_scan            4096
  scan_sleep_millisecs    10000

------------------------------------------------------------
17. OS release
  From /etc/*-release /etc/*-version
  os-release SUSE Linux Enterprise Server 16.0

------------------------------------------------------------
18. Disk information
SPEC is set to: /home/cpu2026-1.0.1-ic2026.0-rate
  Filesystem     Type   Size  Used Avail Use% Mounted on
  /dev/sda2      btrfs  445G  170G  276G  39% /home

------------------------------------------------------------
19. /sys/devices/virtual/dmi/id
    Vendor:         Lenovo
    Product:        ThinkSystem SR650 V3 MB,EGS,DDR5,SH,2U
    Product Family: ThinkSystem
    Serial:         1234567890

------------------------------------------------------------
20. dmidecode
```

(Continued on next page)

Platform Notes (Continued)

```
  Additional information from dmidecode 3.6 follows.  WARNING: Use caution when you interpret this section.
  The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
  determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
   "DMTF SMBIOS" standard.
   Memory:
     16x Samsung M321R4GA3PB0-CWMXH 32 GB 2 rank 5600


 ------------------------------------------------------------
 21. BIOS
 (This section combines info from /sys/devices and dmidecode.)
    BIOS Vendor:       Lenovo
    BIOS Version:      ESE139E-3.90
    BIOS Date:         05/07/2026
    BIOS Revision:     3.90
    Firmware Revision: 8.10
```

Compiler Version Notes

```
==============================================================================
C       | 782.lbm_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++     | 731.astcenc_r(base) 736.ocio_r(base) 748.flightdm_r(base)
        | 766.femflow_r(base) 767.nest_r(base) 772.marian_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
C++, C  | 709.cactus_r(base) 737.gmsh_r(base)
------------------------------------------------------------------------------
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
  Version 2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------

==============================================================================
Fortran | 722.palm_r(base) 749.fotonik3d_r(base) 765.roms_r(base)
```

(Continued on next page)

Compiler Version Notes (Continued)

```
------------------------------------------------------------------------------
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version
  2026.0.0 Build 20260331
Copyright (C) 1985-2026 Intel Corporation. All rights reserved.
------------------------------------------------------------------------------
```

Base Compiler Invocation

C benchmarks:
icx

C++ benchmarks:
icpx

Fortran benchmarks:
ifx

Benchmarks using both C and C++:
icpx icx

Base Portability Flags

737.gmsh_r: -fno-associative-math

Base Optimization Flags

C benchmarks:
-m64 -std=c18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

C++ benchmarks:
-m64 -std=c++17 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

Fortran benchmarks:
-m64 -stand f18 -Wl,-z,muldefs -Wl,-plugin-opt=-inline-threshold=1500
-xsapphirerapids -mprefer-vector-width=512 -O3 -ffp-model=fast -flto

(Continued on next page)

Base Optimization Flags (Continued)

Fortran benchmarks (continued):
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

Benchmarks using both C and C++:
-m64 -std=c++17 -std=c18 -Wl,-z,muldefs
-Wl,-plugin-opt=-inline-threshold=1500 -xsapphirerapids
-mprefer-vector-width=512 -O3 -ffp-model=fast -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/tcmalloc-2.18.1/lib -ltcmalloc_minimal

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu2026-Flags-V1.2-Eaglestream-AD.html
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2026/results/flags/Lenovo-Platform-SPECcpu2026-Flags-V1.2-Eaglestream-AD.xml
http://www.spec.org/cpu2026/results/flags/Intel-ic2026-official-linux64-v1.1.xml

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2026 v1.0.1 on 2026-05-27 08:51:00-0400.
Report generated on 2026-08-11 15:22:56 by CPU2026 PDF formatter (unknown).
Originally published on 2026-06-16.